


# HabasitLINK<sup>®</sup> Plastic Modular Belts

## Engineering Guide

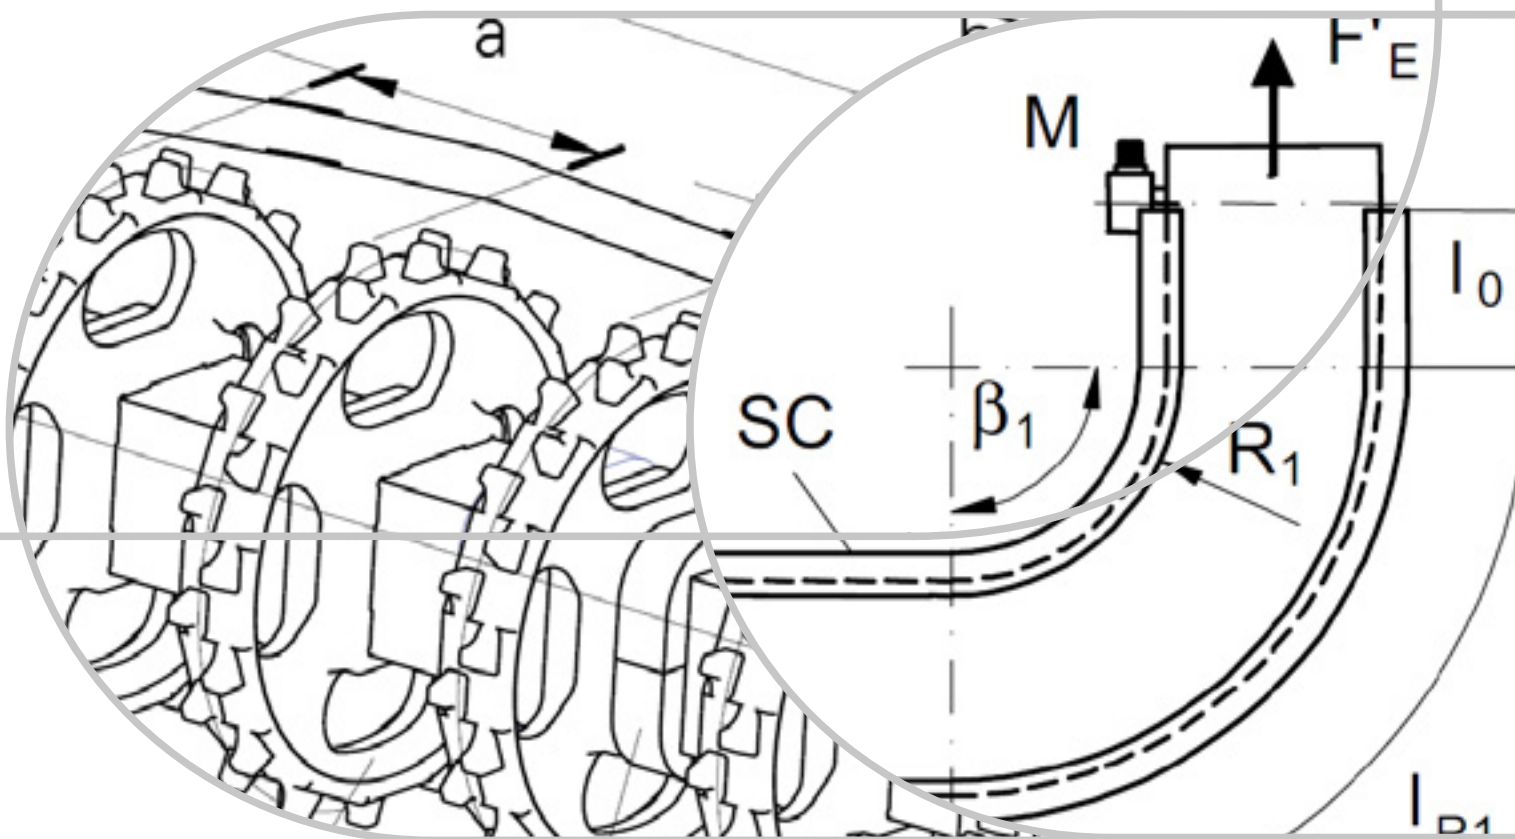

This **disclaimer** is made by and on behalf of Habasit and its affiliated companies, directors, employees, agents and contractors (hereinafter collectively "HABASIT") with respect to the products referred to herein (the "Products").

**SAFETY WARNINGS SHOULD BE READ CAREFULLY AND ANY RECOMMENDED SAFETY PRECAUTIONS FOLLOWED STRICTLY!**

Please refer to the Safety Warnings herein, in the Habasit catalogue as well as installation and operating manuals.

All indications / information as to the application, use and performance of the Products are recommendations provided with due diligence and care, but no representations or warranties of any kind are made as to their completeness, accuracy or suitability for a particular purpose. The data provided herein are based on laboratory application with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experience may lead to re-assessments and modifications within a short period of time and without prior notice.

EXCEPT AS EXPLICITLY WARRANTED BY HABASIT, WHICH WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, THE PRODUCTS ARE PROVIDED "AS IS". HABASIT DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE, ALL OF WHICH ARE HEREBY EXCLUDED TO THE EXTENT ALLOWED BY APPLICABLE LAW. BECAUSE CONDITIONS OF USE IN INDUSTRIAL APPLICATION ARE OUTSIDE OF HABASIT'S CONTROL, HABASIT DOES NOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS, INCLUDING INDICATIONS ON PROCESS RESULTS AND OUTPUT.

#### **WARNING**

Habasit belts and chains are made of various plastics that WILL BURN if exposed to sparks, incendiaries, open flame or excessive heat. NEVER expose plastic belts and chains to a potential source of ignition. Flames resulting from burning plastics may emit TOXIC SMOKE and gasses as well as cause SERIOUS INJURIES and PROPERTY DAMAGE. See the Fire Hazard Data Sheet for additional information. 0011 PRO 140 Den 0816HQR

# Contents

## Introduction

Modular belt features	4
Product range	8
GripTop belt pattern (configurations)	9
Standard belt materials	10
Special belt materials	11
Materials for sprockets	16
Materials for wear strips	17
Material combinations	18
Applications using HabasitLINK® belts	19
Rod retaining systems	35
Modular belt conveyor components	37
Belt and sprocket evaluation	38

## Design guide

Horizontal conveyors – basic design	39
Horizontal conveyors – drive concepts	42
Elevating conveyors	43
Radius belts	48
Spiral conveyors	51
Sprocket evaluation	52
Slider support systems	63
Product transfer systems	66

## Calculation guide

Habasit support	69
Effective tensile force (belt pull) $F'_E$	70
Admissible tensile force $F_{adm}$	72
Dimensioning of shafts	74
Calculation of the catenary sag	75
Effective belt length and width	76

## Material properties

Chemical resistance	78
---------------------	----

## Appendix

Trouble-shooting guide	83
List of abbreviations	85
Conversion of units metric/imperial	87
Glossary of terms	88
Design recommendations	91
Sprocket spacing	92
Habasit solutions in motion	94

## “Bricklay” belt pattern

HabasitLINK® modular belts are made of modules molded from thermoplastic materials connected by solid plastic rods. The all-plastic design promotes long life and superior performance in many applications. In specific cases stainless steel rods can be offered, providing high belt stiffness. Multiple widths are achieved by using a “bricklay” pattern, which also provides high lateral and diagonal belt strength and stiffness.



“Bricklay” pattern

## “Mold to width” belts

MTW belts are assembled with one module per row and provide a defined belt width. MTW belts are usually available in a range of belt widths and are not bricklaid.

## HabasitLINK® belt styles and series

HabasitLINK® modular belts are available in various module pitches:

Series	Pitch	
M0800	08.0 mm / 0.3"	Micropitch belts for extra tight transfers
M1000	12.7 mm/0.5"	Minipitch belts – easy to clean
M1100	12.7 mm/0.5"	Minipitch belts for extra tight transfers
M1200	12.7 mm/0.5"	Minipitch belts for tight transfers
SM/CM605	12.7 mm/0.5"	Minipitch belts for tight transfers
HDS605	12.7 mm/0.5"	Minipitch belts for tight transfers
RS511/515	12.7 mm/0.5"	Minipitch radius belts for tight transfers
106	19.1 mm/0.75"	Belts for tight transfers
M2400	25.4 mm/1.0"	Bottling/container and corrugated
M2500	25.4 mm/1.0"	General conveying
M2600	25.4 mm/1.0"	Bottling, container and general heavy conveying
IS/CT610	25.4 mm/1.0"	Radius belts
ST/VT610	25.4 mm/1.0"	General conveying
HDS610	25.4 mm/1.0"	Easy to clean
208	05.4 mm/1.0"	Straight belts
MB610	25.4 mm/1.0"	Heavy duty
F50	27.9 mm/1.1"	Large open area belts
PR612	30.5 mm/1.2"	Radius belts
M3300	33.0 mm/1.3"	Radius belts
M3800	38.1 mm/1.5"	Heavy duty radius belts
SP/IS615	38.1 mm/1.5"	Straight and radius belts
ST/VT615	38.1 mm/1.5"	General conveying
CC40	44.5 mm/1.75"	Straight belts
M5000	50.8 mm/2.0"	Heavy duty
M5100	50.8 mm/2.0"	Raised rib belt for pasteurizer
M5200	50.8 mm/2.0"	Radius and spiral belts
M5400	55.9 mm/2.2"	Roller Top
SP/SE/IS620	50.8 mm/2.0"	Straight and radius belts
HDS620	50.8 mm/2.0"	Easy to clean
HDU620	50.8 mm/2.0"	Easy to clean
FF620	50.8 mm/2.0"	Fluid flow belts
MB620	50.8 mm/2.0"	Heavy duty
PR620	50.8 mm/2.0"	Radius spiral belts
M6300	63.5 mm/2.5"	Heavy duty
M6400	63.5 mm/2.5"	Heavy duty conveying for extreme loads

## Closed belt surface versus open area grid belts

- **FlatTop belts** are designed to provide a totally closed top surface (0% open area).
- **Flush Grid belts** are designed to permit maximum air and fluid flow through the belt, allowing more effective and efficient cooling or washing of the product during conveying. The following open area definitions are used (for individual figures see product data sheets).

**Open area (free flow):** This is the effective area (%) of vertical openings in the belt. It is relevant for the flow rate through the belt (resistance to air and water flow).

**Open contact area:** This is the area of the belt (%) which is not in contact with any totally flat product conveyed on its surface. This figure is larger than the open area and relevant for air contact with the product surface for cooling operations.

You can find more detailed product information on [www.habasit.com](http://www.habasit.com) or in our brochure "4178 – HabasitLINK® Plastic Modular Belts – Product Guide".

## Closed hinge design

The closed hinge design for material handling and highly loaded non-food applications offers tightly closed hinges which provide the maximum possible load transmission and abrasion resistance.



M2620 Reverse side with closed hinges

## Open hinge design

For food applications where sanitation is critical, special link designs are used, which provide gaps between the links and thus allow access to the partially exposed hinge rod. The patented oblong rod holes, which improve accessibility, are offered in various styles. Sanitation is improved and the rods can be visually inspected without disassembling the belt. For the Flat Top open hinge design the hinge area opens as the belt travels over the sprockets to provide access from the top and bottom of the belt during sanitation.



M5010: Reverse side with open hinges

## Dynamic open hinge design

The belt underside on certain belt types features the "dynamic open hinge". Compared to the common open hinge, the scalloped hinge design creates an even bigger gap without weakening hinge strength. The gap width will also increase dynamically as the belt articulates around the conveyor's sprockets, which eases the removal of debris. It is specifically designed to reduce cleaning time and costs and meets the highest HACCP requirements.



Oblong pivot hole

## Product conformity

### FDA (Food and Drug Administration)

HabasisLINK® is offered in materials which are in compliance with FDA, 21CFR part 170 – 199.

### EU conformity

HabasisLINK® is offered in materials which are in compliance with EU Regulations.

### USDA Meat & Poultry acceptance

Several HabasisLINK® belt designs are in compliance with USDA AMS Meat & Poultry requirements and NSF/ANSI/3-A 14159-3 standards. Certification is valid only

when optional belt accessories like cleats, v-guides and scoops are also in compliance with the relevant standards.

### USDA Dairy acceptance

Several HabasisLINK® PP belt designs are in compliance with USDA Dairy Equipment Guidelines and 3-A sanitary standard 20-xx. Certification is valid only when optional belt accessories like cleats, v-guides and scoops are also in compliance with the relevant standards.

Please consult the [www.habasis.com/services/regulations](http://www.habasis.com/services/regulations) website or contact Habasis for details.



M5060: Reverse side with dynamic open hinges

## The HabasitLINK® drive system

All HabasitLINK® belts are positively driven by injection-molded plastic sprockets or alternatively, machined sprockets.

Two configurations are used:

- a) Double row of teeth in offset positions, allowing bi-directional drive
- b) Single row of lug-type teeth also allowing bi-directional drive

Another advantage of most HabasitLINK® molded sprockets is the “open-window” design, which promotes sanitation across the full width of the conveyor shafts.

Habasit HyCLEAN sprockets have been developed to improve hygiene conditions and cleaning efficiency in food processing areas. This design permits 100% hinge exposure and accessibility for cleaning.

Various sizes are available as split sprockets.

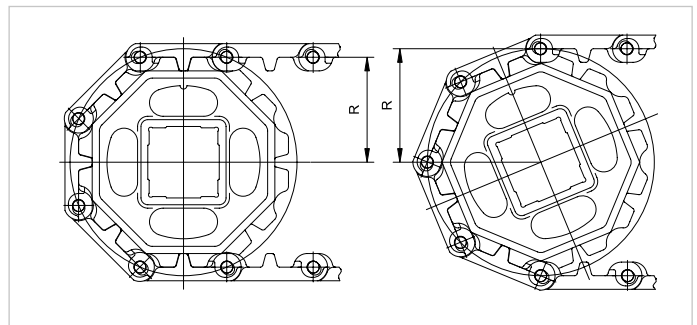
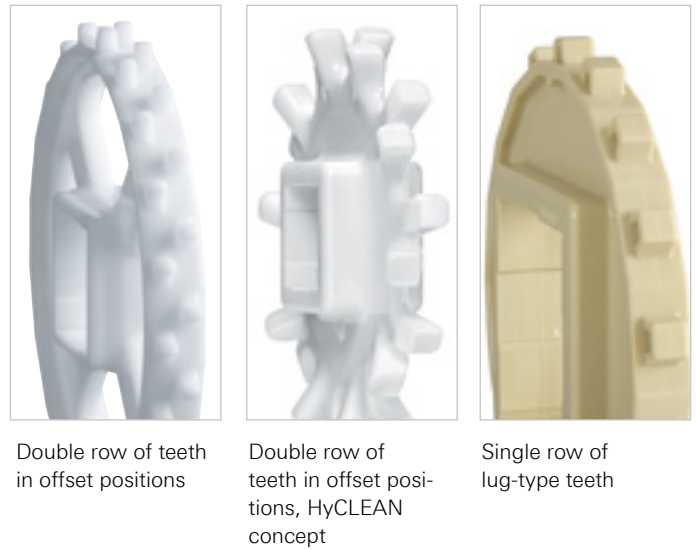


Figure 10: Sprocket engagement

## The polygon effect (chordal action)

Module and chain links rotating around the pitch of the sprocket cause the linear belt speed to vary (Figs. 10 and 20). The pivot rod travels on the pitch diameter of the sprocket while the module moves through the smaller chordal radius causing a horizontal rise and fall of the module. This polygon effect is typical of all modular belt systems. The magnitude of speed variation depends on the number of sprocket teeth.

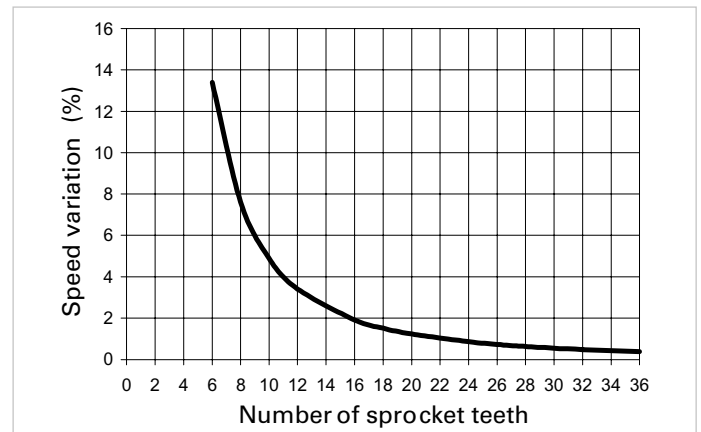


Figure 20: Polygon effect



## Product information on [www.habasit.com](http://www.habasit.com)

Please visit our website for in-depth information on products and applications as well as for detailed technical data (product news, product series overview, information about accessories, product data sheets).



## Product information brochures


HabasitLINK® plastic modular belts are produced to the highest standards. The range comprises more than 80 belt types, with new types constantly under development to ensure the most advanced offering at all times. For detailed product information about our plastic modular belts, please refer to our brochure “Habasit Plastic Modular Belts”.



4178 – HabasitLINK® Plastic Modular Belts Product Guide

## Belt installation information on [www.habasit.com](http://www.habasit.com)

You can get detailed information about belt installation from product-related installation flyers and the installation guide.

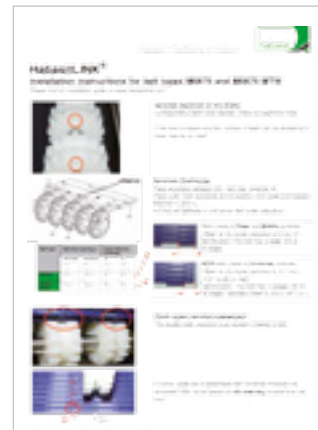

Installation Flyer




6001 – Installation Guide




## GripTop with straight indent

All belt modules except edge modules are provided with rubber top over the whole width. The standard indent is described in the table below.

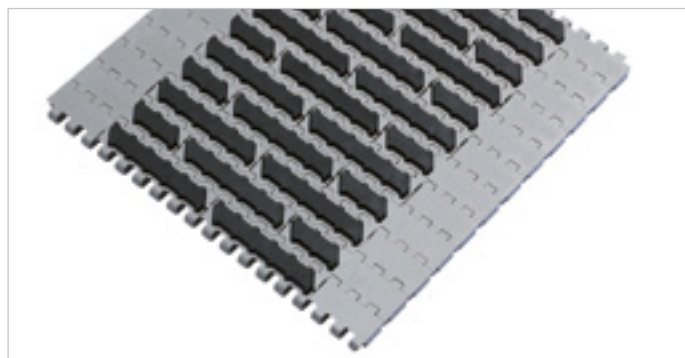


## GripTop with staggered indent

The belt is composed of rubber top modules with alternating widths on every second row. The standard indent is described in the table below.

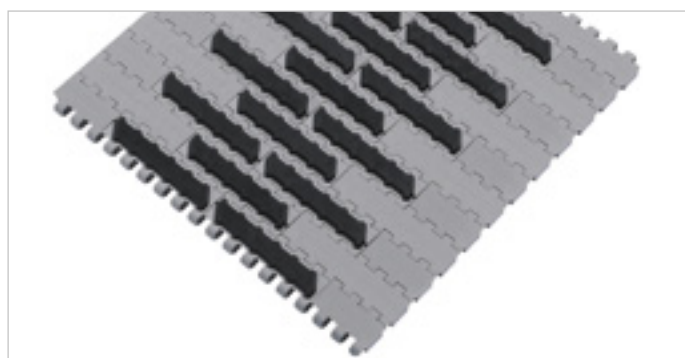

## GripTop alternating

It is possible to have a configuration with alternating GripTop rows. The distance between the GripTop rows corresponds to the belt pitch. The standard indent is described in the table below.

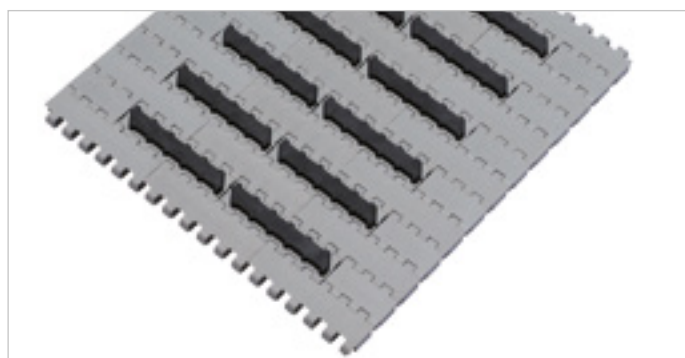

Belt type	Standard indent	
	mm	inch
M1200	50	2"
SM/CM605	50.8	2"
M2470	38	1.5"
M2520/M2533	50	2"
M2540	21	0.83"
M2544	35.5	1.4"
IS/CT610	76.2	3"
M2620	43	1.7"
M2670	50	2"
M3800	30	1.18"
SP615	76.2	3"
IS615	88.9	3.5"
M5000	75	3"
SP620	76.2	3"
IS620	88.9	3.5"

## Conveyor design aspects

For modules made entirely of high friction (HF) material, the carry way wear strips are positioned so as not to be in contact with the high friction material.

Use a roller return on straight conveyor systems and in the straight sections of radius conveyors.

Radius return way wear strips through the curves are positioned so as not to be in contact with GripTop material.

Material	Code	Description	Density g/cm <sup>3</sup>	Temperature range
Polypropylene	PP	Thermoplastic material with a good price/performance ratio (material for most common conveying applications). Excellent chemical resistance to acids and alkalines. * High impacts below 10 °C (50 °F) must be avoided.	0.9	+5 °C to +105 °C (*) +40 °F to +220 °F (*)
Polyethylene	PE	Thermoplastic material well-suited for very low temperatures and/or high impact applications. Excellent chemical resistance to acids and alkalines. Not suitable for abrasive applications. * Below -40 °C (-40 °F), thermal belt shrinkage requires a sprocket pitch diameter adaptation.	0.94	-70 °C to +65 °C (*) -94 °F to +150 °F (*)
Polyoxymethylene (Acetal)	POM	Thermoplastic material with high strength and a low coefficient of friction. Impact and cut resistant surface. Suitable for heavy duty applications and low temperatures. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	1.42	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Polyamide (Nylon)	PA	Thermoplastic material with high strength and abrasion resistance. Suitable for heavy duty applications in dry conditions and at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures.	1.14	Wet conditions: not recommended  Dry conditions: -46 °C to +130 °C (short-term +160 °C) -50 °F to +266 °F (short-term +320 °F)

For detailed declarations on compliance by material and color, please contact Habasit.

Material	Code	Description	Density g/cm <sup>3</sup>	Temperature range
Antistatic Polypropylene	PP +AS	Thermoplastic material with reduced electrical surface resistance to reduce dust accumulation and belt charge-up. * High impacts below 10 °C (50 °F) must be avoided.	0.9	Wet conditions: not recommended  Dry conditions: +5 °C to +105 °C (*) +40 °F to +220 °F (*)
Detectable Polypropylene	PP +DE	Thermoplastic material with a special additive which makes the material easily detectable (by X-rays and metal detectors). Excellent chemical resistance to acids and alkalines. * High impacts below 10 °C (50 °F) must be avoided.	1.09	+5 °C to + 105 °C (*) +40 °F to 220 °F (*)
Electrically conductive Polypropylene	PP +EC	Thermoplastic material with low electrical surface and volume resistance. Electrical resistance meets DIN EN 61340 for ESD safety areas.	1.02	+5 °C to +105 °C +40 °F to +220 °F
Electrically conductive and flame retardant Polypropylene	PP +FC	Thermoplastic material with a combination of low electrical resistance and very good flame retardant properties. Burning behavior classified as Cfl-S1 according to DIN EN 13501, (comparable to former DIN 4102 B1). Halogen-free, conforms with RoHS. Electrical resistance meets DIN EN 61340 for ESD safety areas.	1.08	+5 °C to +80 °C +40 °F to +176 °F
Flame retardant Polypropylene	PP +FR	Flame retardant thermoplastic material for most common conveying applications with special demands for low flammability. Burning behavior classified as Cfl-S1 according to DIN EN 13501, (comparable to former DIN 4102 B1). Halogen-free, conforms with RoHS. * High impacts below 10 °C (50 °F) must be avoided.	1.05	+5 °C to +105 °C (*) +40 °F to +220 °F (*)
Submersible Polypropylene	PP +GH	Thermoplastic material with a density that allows the material to sink in water. Good chemical and hot water resistance, which permits continuous use in boiling water. * High impacts below 10 °C (50 °F) must be avoided. For details on chemical resistance, please contact Habasit.	1.24	+ 5 °C to + 105 °C (*) +40 °F to + 220 °F (*)
Hot water resistant Polypropylene	PP +HW	Stabilized thermoplastic material with improved resistance against oxidation and embrittlement.	0.9	+ 5 °C to + 105 °C +40 °F to + 220 °F

For detailed declarations on compliance by material and color, please contact Habasit.

Material	Code	Description	Density g/cm <sup>3</sup>	Temperature range
HabaGUARD® Polypropylene	PP +H15	Thermoplastic material containing an antimicrobial additive, with excellent chemical resistance to acids and alkalines.	0.9	Ambient temperature
HabaGUARD® Polyethylene	PE +H15	Thermoplastic material containing an antimicrobial additive, well suited for low temperatures and high impact applications. Excellent chemical resistance against acids and alkalines.	0.94	Ambient temperature
Detectable Polyethylene	PE +DE	Thermoplastic material with a special additive, which makes the material easily detectable (by X-rays and metal detectors). Suitable for low temperature and/or high impact applications. Excellent chemical resistance to acids and alkalines. * Below -40 °C (-40 °F), thermal belt shrinkage requires a sprocket pitch diameter adaptation.	1.15	-70 °C to +65 °C (*) -94 °F to +150 °F (*)
Antistatic Polyoxymethylene (Acetal)	POM +AS	Thermoplastic material with reduced electrical surface resistance to reduce dust accumulation and belt charge-up. Suitable for heavy duty applications and low temperatures. Material has high strength, a low coefficient of friction and a scratch-resistant surface.	1.42	Wet conditions: not recommended  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Detectable Polyoxymethylene (Acetal)	POM +DE	Thermoplastic material with a special additive, which makes the material easily detectable (by X-rays and metal detectors). The material has good chemical resistance against oil and alkalines, but is not suitable for long-term contact with high concentrations of acids and chlorine.	1.67	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
X-ray detectable Polyoxymethylene (Acetal)	POM +DX	Thermoplastic material with a special filler to make the material X-ray detectable.	–	Wet conditions: -40 °C to + 60 °C -40 °F to + 140 °F  Dry conditions: -40 °C to + 93 °C -40 °F to + 200 °F
Electrically conductive Polyoxymethylene (Acetal)	POM +EC	Thermoplastic material with low electrical surface and volume resistance. Electrical resistance meets DIN EN 61340 for ESD safety areas. Material has high strength and a low coefficient of friction. Suitable for heavy duty applications and low temperatures.	1.42	Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Impact and cut resistant Polyoxymethylene (Acetal)	POM +IM	Thermoplastic material with an advanced impact and cut resistant surface. Suitable for meat cutting conveyors and high impact applications. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	1.42	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F

For detailed declarations on compliance by material and color, please contact Habasit.

Material	Code	Description	Density g/cm <sup>3</sup>	Temperature range
Fatigue resistant Polyoxymethylene (Acetal)	POM +JM	Thermoplastic material with high strength, a low coefficient of friction and improved fatigue resistance. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	1.42	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Low friction Polyoxamethylene (Acetal)	POM +LF	Thermoplastic material with high strength and a low coefficient of friction. Impact and cut resistant surface. Suitable for fast running applications. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	1.42	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Wear resistant Polyoxymethylene (Acetal)	POM +PK	Extra wear resistant thermoplastic material with high strength, a low coefficient of friction and very good fatigue resistance. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	1.42	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Ultra low friction Polyoxymethylene (Acetal)	POM +UF	Thermoplastic material with high strength and a low coefficient of friction (ultra-low friction grade self-lubricating additives). Impact and cut resistant surface. Suitable for fast running applications. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	1.42	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
UV protected Polyoxymethylene (Acetal)	POM +UV	Thermoplastic material with improved resistance against UV radiation, especially for outdoor applications. The material has high strength and a low coefficient of friction. It is suitable for heavy duty applications and low temperatures.	1.42	Wet conditions: -40 °C to + 60 °C -40 °F to + 140 °F  Dry conditions: -40 °C to + 93 °C -40 °F to + 200 °F

For detailed declarations on compliance by material and color, please contact Habasit.

Material	Code	Description	Density g/cm <sup>3</sup>	Temperature range
Reinforced Polyamide (Nylon)	PA +GF	Reinforced thermoplastic material with high strength. Suitable for heavy conveying applications in dry conditions and at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures.	1.35	Wet conditions: not recommended  Dry conditions: -40 °C to +145 °C (short-term +175 °C) -40 °F to +293 °F (short-term +347 °F)
Reinforced Polyamide (Nylon)	PA +HT	Reinforced thermoplastic material with very high strength and toughness. Suitable for heavy conveying applications in dry conditions and at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures.	1.37	Wet conditions: not recommended  Dry conditions: -40 °C to +170 °C (short-term +200 °C) -40 °F to +338 °F (short-term +392 °F)
Reinforced non-stick Polyamide (Nylon)	PA +HN	Reinforced non-stick thermoplastic material with high strength. Suitable for heavy conveying applications in dry conditions and at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures.	1.41	Wet conditions: not recommended  Dry conditions: -40 °C to +170 °C (short-term +200 °C) -40 °F to +338 °F (short-term +392 °F)
Impact resistant Polyamide (Nylon)	PA +IM	Tough thermoplastic material with good strength and fatigue resistance. Suitable for heavy conveying applications with high impact loads. The belt properties and dimensions change with moisture absorption. The material can replace impact resistant acetal in impact intensive applications, but is more susceptible to cuts. In wet environments, dimensional changes need to be considered.	1.08	Wet conditions: -46 °C to +60 °C -50 °F to +140 °F  Dry conditions: -46 °C to +80 °C -50 °F to +176 °F
Polyamide (Nylon)	PA +RM	Tough thermoplastic material with good strength and fatigue resistance. The belt properties include good dimensional stability, low moisture absorption and a high level of heat resistance. Flammability UL94 V2	1.06	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +118 °C (short term 135 °C) -40 °F to +245 °F (short term 275 °F)

For detailed declarations on compliance by material and color, please contact Habasit.

Material	Code	Description	Density g/cm <sup>3</sup>	Temperature range
Super high temperature	ST	Reinforced thermoplastic material with very good heat and hydrolysis resistance. Suitable for light conveying applications at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures. Flammability UL94 V0.	1.65	Wet conditions: on request  Dry conditions: 0 °C to +200 °C (short-term +240 °C) +32 °F to +392 °F (short-term +464 °F)
Flame retardant Polybutylene-terephthalate	PBT +FR	Flame retardant thermoplastic material with excellent stiffness and hardness. Suitable for conveying applications with special demands for low-flammability. The material has good friction and wear properties and good dynamic long-term behavior. Flammability UL94 V0.	1.47	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +130 °C (short-term +150 °C) -40 °F to +266 °F (short-term +302 °F)
Thermoplastic elastomer	TPE	Soft thermoplastic material with a hardness of 50 or 65 Shore A. The material has high friction values and good abrasion resistance. Suitable for conveying applications where a high grip between the belt and the product is required. Used for GripTop modules.	1.12	-40 °C to +60 °C -40 °F to +140 °F
Flame retardant thermoplastic elastomer	TPE +FR	Flame retardant soft thermoplastic material with a hardness of 50 shore A. The material has high friction values and good abrasion resistance. Suitable for conveying applications where a high grip between the belt and the product is required. Used for GripTop modules. Flammability UL94 V0.	1.25	-40 °C to +60 °C -40 °F to +140 °F
Thermoplastic elastomer	TPV	Soft thermoplastic material with a hardness of 55 or 72 Shore A. The material has high friction values and good abrasion resistance. Suitable for conveying applications where a high grip between the belt and the product is required. Used for GripTop modules.	0.96	-40 °C to +71 °C -40 °F to +160 °F

For detailed declarations on compliance by material and color, please contact Habasit.



Material	Code	Description	Temperature range
Polypropylene	PP	Thermoplastic material with excellent chemical resistance to acids, alkalines and hot water. Abrasion resistance not as good as with POM.	+5 °C to +105 °C +40 °F to +220 °F
Polyoxymethylene (Acetal)	POM	Lubricated thermoplastic material specially formulated for molded sprockets, with high strength and good abrasion resistance. Good chemical resistance to oil and alkalines, but not suitable for long-term contact with high concentrations of acids and chlorine.	Wet conditions: -40 °C to +60 °C -40 °F to +140 °F  Dry conditions: -40 °C to +93 °C -40 °F to +200 °F
Polyamide	PA	Thermoplastic material for molded or machined sprockets with high strength and very good abrasion resistance. Suitable for heavy duty applications in dry conditions and at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures.	Wet conditions: not recommended  Dry conditions: -46 °C to +130 °C (short-term +160 °C) -50 °F to +266 °F (short-term +320 °F)
Thermoplastic Polyurethane	TPU	Tough thermoplastic material for molded or machined sprockets with very good abrasion resistance. Suitable for abrasive applications in wet or dry conditions with medium loads. The material is specially formulated to reduce teeth wear to a minimum.	-20 °C to +50 °C -4 °F to +120 °F
Super high temperature material	ST	Reinforced thermoplastic material with very good heat and hydrolysis resistance. Suitable for light conveying applications at elevated temperatures. The material is specially modified to keep its properties stable over a long time at elevated temperatures. Flammability UL94 V0	Wet conditions: on request  Dry conditions: 0 °C to +200 °C (short-term +240 °C) -32 °F to +392 °F (short-term +464 °F)
Ultra high molecular weight Polyethylene	PE-UHMW	Ultra high molecular weight material for machined sprockets. Good abrasion resistance and very good chemical resistance.	-70 °C to +50 °C -94 °F to +120 °F

Other materials on request. For detailed declarations on compliance by material and color, please contact Habasit.

Material	Code	Description	Temperature range
Low friction ultra high molecular weight Polyethylene	TP40	High performing material for high speed and high load applications (high PxV limit). Compared to standard PE40 reduced friction, also minimized dusting and wear. Not suitable for abrasive conditions.	-70 °C to +65 °C <i>-94 °F to +150 °F</i>
Ultra high molecular weight Polyethylene	PE40 (PE-UHMW)	For heavy conveying applications (high loads); offers reduced wear and a longer lifetime. Not suitable for abrasive conditions.	-70 °C to +65 °C <i>-94 °F to +150 °F</i>
Cast Polyamide with incorporated Polymer and/or solid lubricating additives	PA6G-LF	Cast material with high molecular weight, high strength and very high wear resistance. Due to the incorporated lubricating additives the friction values are very low, and due to the high molecular weight the material is very tough and therefore very abrasion resistant. Suitable for heavy applications and high speeds. The material is hygroscopic (water adsorption should be taken into account).	-46 °C to +120 °C <i>-50 °F to +248 °F</i>
Polyester	PET	Very hard material which does not absorb moisture. Suitable for high loaded applications. In abrasive applications the wear on the wear strip and on the belt are well-balanced.	Wet conditions: -40 °C to +60 °C <i>-40 °F to +140 °F</i>  Dry conditions: -40 °C to +100 °C <i>-40 °F to + 212 °F</i>

Other materials on request. For detailed declarations on compliance by material and color, please contact Habasit.

## Materials

For standard materials for rods see the product data sheets. If no specific requirements are known, the standard rod materials will be delivered with each belt. Other material combinations are recommended for abrasive and other heavy duty applications.

### Recommended module, rod, sprocket and support material combinations:

Application		Modules	Rods	Sprockets	Support
Standard	General use	PP	PA	POM	PE40
	General use, wet	PP	POM	POM	PE40
	Chemical resistance	PP	PP	PP	PE40
	Impact, low temperature	PE	PE	POM	PE40 / TP40
	High load, dry	POM+JM	PA	POM	TP 40 / PA6G-LF
	High load, wet	POM+JM	PBT	POM	PE40 / TP40
Specifically for meat	Cutting, low temperature	POM+IM	PE	POM	PE40 / PET
Abrasive environment	Wet, up to 60 °C (140 °F)	PP	POM	TPU, PA, Steel	Steel
	Wet, up to 60 °C (140 °F), high load	POM	PBT	POM, PA, Steel	Steel
	Dry	POM	PA	PA	PA6G-LF Steel
	Dry, high load	POM	Steel	PA	PA6G-LF Steel
High temperatures	Wet, 60 °C to 105 °C (140 °F to 220 °F)	PP	PP	PP, Steel	Steel
	Dry, high load 93 °C (200 °F)	POM	PA	PA	PA6G-LF
	Elevated temperatures 130 °C (266 °F)	PA	PA	PA	Steel
	Food contact and temperatures up to 145 °C (293 °F)	PA+GF	ST/Steel	ST	Steel
	Temperatures up to 170 °C (338 °F)	PA+HT	ST/Steel	ST	Steel
	Temperatures up to 200 °C (392 °F)	ST	ST/Steel	ST	Steel
Special	Fryer up to 205 °C (401 °F)	ST	ST/Steel	ST	Steel
	Microwave unfreezing -30 °C to 40 °C (-22 °F to 104 °F)	PE	PE	POM	PE40 / Steel
	Microwave cooking up to 100 °C (212 °F)	PP	PP	POM	PE40 / Steel
	Microwave baking 140 °C to 160 °C (284 °F to 320 °F)	ST	ST	ST	Steel

The most suitable material combination will be selected depending on the specific application.

# Applications using HabasitLINK® belts

## Meat (beef and pork)

The selection tables below contain belt types in standard materials and are recommendations only. Depending on the application parameters, other belt types or materials may be used as well. Core applications only are listed, without packaging, materials handling or general conveyance.

Belt code	Belt style	Meat (beef and pork)																						
		Slaughtering/Evisceration	Cutting lines/Deboning lines	Bone takeaway	Dressing lines	Trimming lines	Slicing	Fat lines	Offal/Lung lines	Hide lines	Marinate lines	Breeding machines	Freezing lines	Hoof/Shank lines	Bone incline/decline	High impact/shute discharge	Transfer/Crossover conveyance	Elevator	Bacon microwave	Metal detectors	Shrink wrapping	Ground meat lines	Spiral freezer	Crate handling
<b>0.5" pitch belting</b>																								
M1185	Flush Grid										PP POM	PP POM	POM				PP POM		PP POM					
M1220	Flat Top																PP		PE					
M1233	Flush Grid																PP		PE					
M1234	Nub Top												PE POM											
HDS605ST	Flat Top																PP		PE					
M1065	Flat Top																POM		POM					
SM605	Smooth Mesh																PP		PE	PA+HN				
CM605	Curved Mesh																PP							
<b>1" pitch belting</b>																								
M2510	Flat Top				PE POM	PE	PE POM	PP POM									PE POM		PE		PE POM			
M2514	Nub Top												PE POM				PE							
M2533	Flush Grid									PP POM	PP POM	PE POM					PE							PP POM
M2540	Radius Flush Grid																							POM
M2544	Tight Radius																							POM
M2585	Flush Grid												PE POM							PA+GF				
M2586	Raised Rib												POM					MW						
HDS610	Flat Top				PE POM	PE	PE POM	PP POM									PE POM		PE		PE POM			
IS610	Radius Flush Grid																							POM
CT610	Radius Curved Top																							POM
<b>1.1" pitch belting</b>																								
F52	Smart Fit Flat Wire											PA+GF									PA+GF			
F53	Flat Wire Raised Rib																					PA+GF		
<b>1.2" pitch belting</b>																								
PR612-1.6	Tight Turn Radius																							POM
<b>1.5" pitch belting</b>																								
M3840	Radius Flush Grid																							POM
M3843	Tight Radius																							POM
IS615	Radius Flush Grid																							POM

# Applications using HabasitLINK® belts

## Meat (beef and pork)

Belt code	Belt style	Meat (beef and pork)																						
		Slaughtering/Evisceration	Cutting lines/Deboning lines	Bone takeaway	Dressing lines	Trimming lines	Slicing	Fat lines	Offal/Lung lines	Hide lines	Marinating lines	Breading machines	Freezing lines	Hoof/Shank lines	Bone incline/decline	High impact/shute discharge	Transfer/Crossover conveyance	Elevator	Bacon microwave	Metal detectors	Shrink wrapping	Ground meat lines	Spiral freezer	Crate handling
<b>2" pitch belting</b>																								
M5010	Flat Top	POM +IM	POM +IM	PE	PP POM	PP POM	PE	PP POM	POM						POM +IM	PA +IM	PP POM	PE	PE POM				PP POM	
M5011	Perforated Flat Top				PP POM	PP POM											PP POM	PE						
M5013	Cone Top		PE POM														POM							
M5014	Nub Top																PE							
M5015	Flat Top									PP														
M5033	Flush Grid					PP																		PP POM
M5060	Flat Top	POM +IM	POM +IM	POM	PP POM	PP POM	PE	PP POM	POM					POM +IM	POM +IM	POM +IM	PP POM	PE	PE POM					PP POM
M5064	Nub Top																							
M5065	Flat Top				PP POM	PP POM																		
M5067	Minirib																PP POM							
M5290	Radius Flush Grid																							POM
M5293	Tight Radius																							POM
HDU620	Flat Top	PE POM	POM +IM	PE	PP POM	PP POM	PE	PP POM	POM					POM +IM	POM	POM +IM	PP POM	PE	PE POM					PE POM
HDS620CT	Curved Top	PE POM	POM +IM	PE	PP POM	PP POM	PE	PP POM	POM	POM +IM				POM +IM	POM +IM	POM +IM	PP POM	PE	PE POM					PP POM
HDUVT	Vented Top				POM	POM											PP POM	PE						
HDUEZR620	Easy Release																PE							
HDUEZR620	Easy Release																PE							
IS620	Radius Flush Grid																							POM
PR620	Spiral Pro																							POM
PR620SPS	Spiral Pro Small Product Surface																							POM
PR620SPSCT	Spiral Pro Small Product Surface Curved Top																							POM
PR620 TTR	Tight Turn Radius																							POM
FF620																		PP						
<b>2.5" pitch belting</b>																								
M6360	Flat Top	POM +IM	POM +IM	PE POM	PP POM	PP POM		POM						POM	POM +IM	POM +IM	PP POM							PE POM

# Applications using HabasitLINK® belts

## Poultry, sea food

Belt code	Belt style	Poultry													Sea food												
		Live birds	Slaughtering/Evisceration	Skinning	Cut up/Deboning/Trimming lines	Chiller discharge	Offal/Feather lines	Rehang/Bird accumulation	Breeding machines	Grading	Shrink wrapping	Freezing lines	Metal detectors	Elevator	Spiral freezer	Draining	Trimming lines	Breeding machine	Control tables	Glazing	Metal detectors	Freezing lines/Spiral	Elevator	Shrink wrapping	Shrimp processing	Slicer machines	
<b>0.3" pitch belting</b>																											
M0870	Micropitch Flat Top																										POM
M0876	Micropitch Non Slip																										POM
M0885	Micropitch Flush Grid																										POM
<b>0.5" pitch belting</b>																											
M1065	Flat Top							POM			POM										POM						POM
M1185	Flush Grid							PP POM			POM	PP POM		PP		PP POM			POM	PP POM	POM						
M1220	Flat Top											PE									PE						
M1233	Flush Grid										POM	PE						PE	PE POM	PE							
M1234	Nub Top										PE		PE		PE				PE	PE	PE	PE	PE				
HDS605ST	Flat Top											PE									PE						
SM605	Smooth Mesh										POM	PE							PE	PE POM	PE						
CM605	Curved Mesh										POM	PE							PE	PE POM	PE						
<b>1" pitch belting</b>																											
M2510	Flat Top			POM	PE		POM		PP		POM	PE	PE							PE		PE		PE			
M2511	Mesh Top														PE												
M2514	Nub Top											PE		PE						PE	PE	PE					
M2533	Flush Grid			POM				PP POM	PP				PE		PE PP		POM										
M2540	Radius Flush Grid																					POM					
M2544	Tight Radius																					POM					
M2585	Flush Grid										PA +GF	PE POM														PA +GF	
M2586	Raised Rib											POM									POM						
HDS610	Flat Top			POM	PE		POM		PP		POM	PE	PE							PE		PE		PE			
IS610	Radius Flush Grid																					POM					POM
CT610	Radius Curved Top																					POM					POM
PR612-1.6	Tight Turn Radius																					POM					POM
F52	Smart Fit Flat Wire										PA +GF	PE POM														PA +GF	
F53	Flat Wire Raised Rib											POM														POM	
<b>1.5" pitch belting</b>																											
M3840	Radius Flush Grid																					POM					POM
M3843	Tight Radius																					POM					POM
IS615	Radius Flush Grid																					POM					POM

# Applications using HabasitLINK® belts

## Poultry, sea food

Belt code	Belt style	Poultry														Sea food													
		Live birds	Slaughtering/Evisceration	Skinning	Cut up/Deboning/Trimming lines	Chiller discharge	Offal/Feather lines	Rehang/Bird accumulation	Breeding machines	Grading	Shrink wrapping	Freezing lines	Metal detectors	Elevator	Spiral freezer	Draining	Trimming lines	Breeding machine	Control tables	Glazing	Metal detectors	Freezing lines/Spiral	Elevator	Shrink wrapping	Shrimp processing	Slicer machines			
<b>2" pitch belting</b>																													
M5010	Flat Top	PE POM	PE POM	POM	PE	PP POM	POM	PP		PP		PE	PE	PP POM													PE		
M5011	Perforated Flat Top				PE	PE POM		PP				PE	PE	PP POM				PE	PE										
M5013	Cone Top			POM										PE															
M5014	Nub Top													PE															
M5015	Flat Top	PE																											
M5033	Flush Grid																											PP POM	
M5060	Flat Top	PE POM	PE POM	POM	PE	PP POM	POM	PP		PP		PE	PE	PP POM															
M5064	Nub Top												PE	PE															
M5065	Flat Top				PE	PP POM	POM	PP		PP		PE																	
M5067	Minirib													PP POM															
M5290	Radius Flush Grid																											POM	
M5293	Tight Radius																											POM	
HDU620	Flat Top	PE POM	PE POM	POM	PE	PP POM	POM	PP		PP		PE	PE	PP POM															
HDS620CT	Curved Top	PE POM	PE POM	POM	PE	PP POM	POM	PP		PP		PE	PE	PP POM															
HDUVT	Vented Top				PE	PP POM		PP				PE	PE	PP POM															
HDUEZR620	Easy Release											PE		PE															
HDUEZR620	Easy Release											PE		PE															
IS620	Radius Flush Grid																											POM	
PR620	Spiral Pro																											POM	
PR620SPS	Spiral Pro Small Product Surface																											POM	
PR620SPSCT	Spiral Pro Small Product Surface Curved Top																											POM	
PR620 TTR	Tight Turn Radius																											POM	
<b>2.5" pitch belting</b>																													
M6360	Flat Top					PE		PE																					



# Applications using HabasitLINK® belts

## Bakery

Belt code	Belt style	Bakery												
		Raw dough handling	Divider	Proofer lines	Oven infeed/outfeed	Cooling lines	Coating/glazing lines	Freezing lines	Incline/decline lines	Metal detectors	Spiral infeed/outfeed	Spiral/proofing/cooling/freezing	Conditioning lines	Laminating lines
<b>0.3" pitch belting</b>														
M0870	Micropitch Flat Top	POM			POM						POM			
M0873	Micropitch Non Slip				POM						POM			
M1185	Flush Grid				POM	POM	POM				POM			
M0876	Diamond Top	POM												
<b>0.5" pitch belting</b>														
M1065	Flat Top	POM												
M1220	Flat Top	POM	PP	PP					PE				PE	
M1220	GripTop							PP						PP
M1230	Flush Grid	PP	PP		PP	PP	PP	PP	PE	PP	PP	PP		
M1233	Flush Grid		PP		PP	PP	PP	PP	PE	PP	PP	PP		
HDS605ST	Flat Top	PE	PP		PP				PE				PE	
HDS605TT	Tecture Top													
SM605	GripTop							PP						PP
SM605	Smooth Mesh		PP		PP	PP	PP	PP	PE	PP	PP	PP		
CM605	Curved Mesh		PP		PP	PP	PP	PP	PE	PP	PP	PP		
<b>1" pitch belting</b>														
M2510	Flat Top	PE	PP						PE				PE	PP
M2511	Mesh Top	PE	PP											
M2514	Nub Top													PP
M2533	Flush Grid							PP						PP
M2540	Radius Flush Grid													POM
M2544	Tight Radius				ST	PP	PP	PP	PE	PP	PP	PP		POM
M2585	Flush Grid							PP						PP
M2586	Raised Rib													POM
HDS610	Flat Top									PP	PP			PP
IS610	Radius Flush Grid							PP						PP
CT610	Radius Curved Top													POM
PR612-1.6	Tight Turn Radius										PP			PP
M2585	Flush Grid			PA	PP	PP	PP							
M2586	Raised Rib			PA	PP	PP	PP							
HDS610	Flat Top	PE	PP						PE			PE	PP	
ST610	Flat Top													PP
MB610	Flat Top													PP
208-35	Flush Grid					PP	PP	PP	PE	PP	PP	PP		POM
IS610	Radius Flush Grid									PP	PP			
CT610	Radius Curved Top									PP	PP			
IS610GT	Grip Top							PP						PP

# Applications using HabasitLINK® belts Bakery

Belt code	Belt style	Bakery												
		Raw dough handling	Divider	Proofer lines	Oven infeed/outfeed	Cooling lines	Coating/glazing lines	Freezing lines	Incline/decline lines	Metal detectors	Spiral infeed/outfeed	Spiral/proofer/cooling/freezing	Conditioning lines	Laminating lines
<b>1.1" pitch belting</b>														
F51	Flat Wire ½"x1"					PP								
F52	Smart Fit Flat Wire				PA +GF	PP, PA +GF								
<b>1.5" pitch belting</b>														
M3840	Radius Flush Grid										PP POM			PP POM
M3840	Roller Top													POM
M3843	Tight Radius										PP POM			PP POM
M3843	GripTop							PP						PP
M3892	Raised Deck													PP POM
SP615	Flush Grid					PP POM								
IS615	Radius Flush Grid									PP POM	PP POM			
IS615	ROL Radius Flush Grid													POM
IS615	Curved Top High Friction							PP						PP
<b>2" pitch belting</b>														
M5010	Flat Top	PE POM												PE PP
M5010	Roller Top					PP POM								POM
M5032	Flush Grid Heavy Duty													
M5032	Roller Top					PP POM								POM
M5033	Flush Grid	PE POM												
M5060	Flat Top							PP POM						
M5067	Minirib					PP								
M5131	Raised Rib										PP POM			PP POM
M5290	Radius Flush Grid										PP POM			PP POM
M5293	Tight Radius	PE POM											PE POM	
HDU620	Flat Top								PE				PE POM	
HDU620	Curved Top													POM
HDU620	Flat Top ROL													PP POM
FF620	Fluid Flow										PP PA POM			PP POM
IS620	Radius Flush Grid										PP PA POM			
PR620	Spiral Pro										PP PA POM			
PR620SPS	Spiral Pro Small Product Surface										PP POM			
PR620SPSCT	Spiral Pro Small Product Surface Curved Top										PP POM			
PR620 TTR	Tight Turn Radius										PP POM			

# Applications using HabasitLINK® belts

## Snack food, fruits and vegetables

Belt code	Belt style	Snack food (pretzels, potato chips, tortillas)											Fruits and vegetables											
		Corn draining	Proofer lines	Potato processing	Corn processing	Boiler infeed	Fryer	Oven infeed/outfeed	Cooling lines	Seasoning	Incline/decline lines	Bulk feeding	Prewashing/Rinsing	Washer	Draining	Peeling	Elevator	Control/Sorting table	Filling	Freezing lines	Palletizing/depalletizing	Container conveyance	Sterilization conveyance	Metal detector
<b>0.3" pitch belting</b>																								
M0870	Micropitch Flat Top												POM											
M0873	Micropitch Non Slip												POM											
M0885	Micropitch Flush Grid														POM	POM								
<b>0.5" pitch belting</b>																								
M1065	Flat Top																							PP POM
M1185	Flush Grid							PP	PP	POM					POM									
M1220	Flat Top		PP														PP POM							PE
M1220	GripTop										PP													
M1230	Flush Grid									PP POM					PP POM								PP	PE
M1234	Nub Top																PE							
M1233	Flush Grid									PP POM					PP POM								PP	PE
HDS605ST	Flat Top		PP															PP POM						PE
SM605	GripTop										PP													
SM605	Smooth Mesh									PP POM					PP POM								PP	PE
CM605	Curved Mesh									PP POM					PP POM								PP	PE
<b>1" pitch belting</b>																								
M2510	Flat Top				PP POM								PP POM				PP POM	PE PP						PE
M2511	Mesh Top	PP POM																						
M2514	Nub Top																PE PP							
M2516	Diamond Top		PP																					
M2520	Flat Top						ST															PP POM	PP POM	
M2520	GripTop										PP POM													
M2531	Raised Rib																					PP POM		
M2533	Flush Grid		PP			PP	ST	ST	PP POM				PP	PP	PP					PP POM	PP POM	PP POM		PE
M2533	GripTop											PP											PP	
M2540	Radius Flush Grid																						PP POM	
M2540	GripTop											PP												
M2544	Tight Radius																						PP POM	
M2585	Flush Grid						ST	PA +GF	PP POM															
M2586	Raised Rib								PP POM						PP POM							POM		
HDS610	Flat Top				PP POM								PP POM				PP POM	PE PP						PE
HDS610	Curve Vented Top	PP POM																						
ST610	Flat Top																					PP POM	PP POM	
208-35	Flush Grid		PP			PP			PP POM				PP	PP	PP					PE POM	PP POM	PP POM		PE
IS610	Radius Flush Grid																						PP POM	
CT610	Radius Curved Top																						PP POM	
IS610GT	Grip Top										PP													

# Applications using HabasitLINK® belts

## Snack food, fruits and vegetables

Belt code	Belt style	Snack food (pretzels, potato chips, tortillas)										Fruits and vegetables												
		Corn draining	Proofer lines	Potato processing	Corn processing	Boiler infeed	Fryer	Oven infeed/outfeed	Cooling lines	Seasoning	Incline/decline lines	Bulk feeding	Prewashing/Rinsing	Washer	Draining	Peeling	Elevator	Control/Sorting table	Filling	Freezing lines	Palletizing/depalletizing	Container conveyance	Sterilization conveyance	Metal detector
<b>1.1" pitch belting</b>																								
F51	Flat Wire ½"x1"													PP	PP									
F52	Smart Fit Flat Wire							PA +GF	PP PA POM															
F53	Flat Wire Raised Rib								PP POM										POM					
F54	Flat Wire 1"x1"													PP	PP									
<b>1.5" pitch belting</b>																								
M3840	Radius Flush Grid																				PP POM			
M3843	Tight Radius																				PP POM			
M3843	Tight Radius GripTop									PP POM														
M3892	Raised Deck																				PP POM			
IS615	Radius Flush Grid																				PP POM			
<b>1.75" pitch belting</b>																								
CC41	Flat Top			PP PA	PP PA				PP PA	PP PA	PP PE													
CC42	Vented Top			PP PA					PP PA	PP PA		PP	PP	PP										
<b>2" pitch belting</b>																								
M5010	Flat Top			PP POM						PP POM						PE PP	PE PP	PP POM						
M5011	Perforated Flat Top	PP POM										PE PP		PE PP	PP	PE PP								
M5014	Nub Top									PE PP														
M5021	Perforated Flat Top											PP		PP	PP									
M5032	Flush Grid Heavy Duty											PE PP	PP POM	PE PP										
M5033	Flush Grid							PP POM					PP POM	PE PP	PP						PP POM	PP POM	PP	
M5060	Flat Top			PP POM							PP POM					PE PP	PE PP	PE PP						
M5064	Nub Top															PE PP								
M5067	Minirib															PE PP								
M5131	Raised Rib								PP												PP		PP	
M5290	Radius Flush Grid																					PP POM		
M5293	Tight Radius																					PP POM		
HDU620	Flat Top			PP POM							PP POM					PE PP	PE PP	PP POM						
HDU620	Curved Top			PP POM							PP POM					PE PP	PE PP	PP POM						
HDU620	Vented Top	PP POM										PE PP		PE PP	PP	PE PP								
IS620	Radius Flush Grid										PP PBT	PP										PP POM		
SE620	Straight Edge Flush Grid										PP PBT	PP												

# Applications using HabasitLINK® belts Automotive

Belt code	Belt style	Automotive									
		Metal working Stamping outfeed	Car body assembly People mover	Car body assembly Skid conveyor	Car part manufacturing	Car assembly line Buffer stock	Battery filling	Car transport	Car wash	Car detail wash	Water test line
<b>0.5" pitch belting</b>											
M1220	Flat Top					PP POM					
M1230	Flush Grid					PP POM	PP				
SM605	Smooth Mesh						PP				
<b>0.5" pitch belting</b>											
M2420	Flat Top					POM					
M2423	Non Slip		POM+XX PP+XX								
M2470	Flat Top					POM					
M2520	Flat Top	POM		POM		PP POM	PP POM				
M2533	Flush Grid					PP POM	PP POM				
M2540	Radius Flush Grid					PP POM		PP			
M2585	Flush Grid					PP POM					
M2620	Flat Top Heavy Duty	POM		POM		PP POM	PP POM				
M2623	Non Slip		POM+XX PP+XX						POM +XX	POM +XX	
M2670	Flat Top Heavy Duty	POM		POM		PP POM	PP POM				
MB610	Flat Top	POM		POM		POM	POM				
<b>1.5" pitch belting</b>											
M3840	Radius Flush Grid	POM						PP			
IS615	Radius Flush Grid							PP			
<b>2" pitch belting</b>											
M5020	Flat Top Heavy Duty		POM+XX PP+XX								
M5021	Perforated Flat Top							PP			
M5023	Non Slip		POM+XX PP+XX						POM +XX	POM +XX	
M5032	Flush Grid Heavy Duty					PP POM	PP POM	PP			
M5131	Raised Rib							PP			
M5290	Radius Flush Grid	POM						PP			
M5293	Tight Radius	POM						PP			
FF620	Fluid Flow							PP			
IS620	Radius Flush Grid							PP			
SE620	Flush Grid							PP			
<b>2.5" pitch belting</b>											
M6420	Flat Top Heavy Duty		POM+XX PP+XX	POM		POM +AS			POM +AS		
M6423	Non Slip		POM+XX PP+XX			POM +AS			POM +AS		
M6424	Perforated Flat Top								POM	POM	POM

An XX material extension indicates that AS or EC or FC or a combination of materials can be applied.

# Applications using HabasitLINK® belts

## Tire manufacturing

Belt code	Belt style	Tire																			
		Mixer infeed/outfeed	Batch off incline	Dip tank	90° incline holding conveyor	Calendering infeed	Calendering outfeed	Extrusion infeed	Extrusion outfeed	Extrusion shower lines	Scaling	Marking	Cooling incline	Cooling horizontal	Cooling decline	Sciver cementing	Water blow-off	Accumulation lines	90° transfer	Tire transport horizontal	Tire transport incline/decline
<b>0.5" pitch belting</b>																					
M1220	Flat Top										POM	POM				POM	POM				POM
M1230	Flush Grid											POM	POM	POM	POM						
<b>1" pitch belting</b>																					
M2420	Flat Top	POM	POM		POM		POM		POM		POM	POM				POM	POM				POM
M2470	Flat Top	POM	POM		POM		POM		POM		POM	POM				POM	POM				POM
M2520	Flat Top	POM	PP POM		POM		PP POM		PP POM		POM	POM				POM	POM				POM
M2520	GripTop		PP POM				PP POM		PP POM												PP POM
M2520	Roller Top																				POM
M2531	Raised Rib														POM	POM	POM				
M2533	Flush Grid	POM									POM				POM	POM	POM	POM			
M2585	Flush Grid		PP POM								PA +GF										
M2620	Flat Top Heavy Duty	POM	POM		POM		PP POM		PP POM		PP POM				POM	POM					POM
M2620	Grip Top		PP POM				PP POM		PP POM												
M2670	Flat Top Heavy Duty	POM	POM		POM		PP POM		PP POM		PP POM				POM	POM					POM
M2670	Grip Top		PP POM				PP POM		PP POM												PP POM
F51	Flat Wire ½"x1"										PA +GF										
<b>2" pitch belting</b>																					
M5013	Cone Top						POM														
M5015	Flat Top																				POM
M5015	GripTop																				POM
M5020	Flat Top Heavy Duty	POM	PP POM		POM		PP POM		PP POM		POM	POM					POM	POM			POM
M5032	Flush Grid Heavy Duty														PP POM	PP POM	PP POM				
M5032	Roller Top																				PP POM
M5131	Raised Rib				PP																
M5182	Roller Top – 90°																				PP POM
<b>2.2" pitch belting</b>																					
M5482	Roller Top																				PP POM

# Applications using HabasitLINK® belts

## Packaging, textiles, wood

Belt code	Belt style	Packaging											Textiles				Wood									
		Check weighers	Filling	Capping	Labeling	Case packers	Shrink wrapping	Tray packers	Metal detectors	Box inclines/declines	Accumulation	90° transfer	Palletizing/depalletizing	Bulk inclines	Box transport horizontal	Dryer	Cutter	Dyeing	Dye filtering	Board handling	Trimming lines	Cross-cutting	Sanding/calibrating lines	Pallet conveying	Chop-saw	Pellet elevator
<b>0.3" pitch belting</b>																										
M0870	Micropitch Flat Top	POM			POM										POM											
M0873	Micropitch Non Slip				POM										POM											
<b>0.5" pitch belting</b>																										
M1220	Flat Top	PP POM	PP POM	PP POM	PP POM				PE				POM		PP POM											
M1220	GripTop								PP																	
M1230	Flush Grid	PP POM	PP POM						PE				POM		PP POM											
HDS605ST	Flat Top	PP POM	PP POM	PP POM	PP POM				PE				POM		PP POM											
SM605	Smooth Mesh	PP POM	PP POM						PE				POM		PP POM											
CM605	Curved Mesh	PP POM	PP POM						PE				POM		PP POM											
<b>1" pitch belting</b>																										
M2420	Flat Top				PP POM	PP POM		PP POM					PP POM		PP POM											
M2470	Flat Top				PP POM	PP POM		PP POM					PP POM		PP POM											
M2470	GripTop								PP POM																	
M2520	Flat Top		PP POM	PP POM	PP POM				PE						PP POM		PP POM									
M2520/33/40	GripTop								PP POM																	
M2520/33/40	Roller Top									POM																
M2531	Raised Rib					POM				POM						PP POM	PP	PP								
M2533	Flush Grid		PP POM	PP POM	PP POM				PE	POM		POM		PP POM	PP	PP POM	PP	PP								
M2540	Radius Flush Grid							PP POM							PP POM											
M2544	Tight Radius							PP POM							PP POM											
M2585	Flush Grid						PA +GF																			
M2620	Flat Top Heavy Duty														PP POM					POM	POM	POM	POM	POM	POM	POM
M2620	Low Back Pressure									PP POM																
M2620/70	GripTop									PP POM																
M2670	Flat Top Heavy Duty														PP POM					POM	POM	POM	POM	POM	POM	POM
208	Flat Top				PP POM	PP POM		PP POM					PP POM		PP POM											
ST610	Flat Top				PP POM	PP POM		PP POM					PP POM		PP POM											
CT610	Curved Top				PP POM	PP POM		PP POM					PP POM		PP POM											
VT610	Mesh Top				PP POM	PP POM		PP POM					PP POM		PP POM											
208	Raised Rib					POM				POM																
208-35	Flush Grid		PP POM	PP POM	PP POM				PE		POM		POM		PP POM	PP	PP POM	PP	PP							
IS610	Radius Flush Grid							PP POM							PP POM											
IS610GT	Grip Top							PP POM							PP POM											
CTIS610	Curved Top							PP POM							PP POM											
MB610	Flat Top														PP POM											



# Applications using HabasitLINK® belts

## Packaging, textiles, wood

Belt code	Belt style	Packaging											Textiles				Wood									
		Check weighers	Filling	Capping	Labeling	Case packers	Shrink wrapping	Tray packers	Metal detectors	Box inclines/declines	Accumulation	90° transfer	Palletizing/depalletizing	Bulk inclines	Box transport horizontal	Dryer	Cutter	Dyeing	Dye filtering	Board handling	Trimming lines	Cross-cutting	Sanding/calibrating lines	Pallet conveying	Chop-saw	Pellet elevator
<b>1.1" pitch belting</b>																										
F51/F52/F53	Flat Wire							PA +GF																		
<b>1.5" pitch belting</b>																										
M3840	Radius Flush Grid							PP POM							PP POM											
M3840	Roller Top									PP POM																
M3843	Tight Radius							PP POM							PP POM											
M3843	Tight Radius GripTop									PP POM																
M3892	Raised Deck							PP POM							PP POM											
IS615	Radius Flush Grid							PP POM							PP POM											
ST/VT615	Flat Top/Vented Top																									
<b>2" pitch belting</b>																										
M5010	Flat Top													PP POM	PP POM											PP POM
M5010	Roller Top									POM																
M5015	GripTop									POM								PP								
M5020	Flat Top Heavy Duty														PP POM					POM	POM	POM	POM	POM	POM	
M5032	Flush Grid Heavy Duty														PP POM			PP								
M5032	Roller Top									PP POM																
M5060	Flat Top													PP POM	PP POM											PP POM
M5131	Raised Rib									PP			PP					PP								
M5182	Roller Top – 90°											PP POM														
M5290	Radius Flush Grid							PP POM							PP POM											
M5293	Tight Radius							PP POM							PP POM											
HDU620	Flat Top													PP POM	PP POM											
MB620	Flat Top														PP POM											
FF620	Fluid Flow														PP POM											
SP/SE620	Flush Grid							PP POM		PP PE																
HDU620	Vented Top							PP POM		PP PE																
HDU620	Curved Top							PP POM		PP PE																
IS620	Radius Flush Grid							PP POM							PP POM											
<b>2.2" pitch belting</b>																										
M5482	Roller Top													PP POM												
<b>2.2" pitch belting</b>																										
MB610	Flat Top																			POM	POM	POM	POM	POM	POM	

# Applications using HabasitLINK® belts

## Corrugated cardboard, printing and paper, postal

Belt code	Belt style	Corrugated cardboard								Printing and paper						Postal					
		Paperroll transport	Down stacker	Transfer cart	Stack handling/buffer	90° transfer	Strap feed	Palletizer	Casemaker feeder	Printing machine outfeed	Stacker outfeed	Wrapping machine outfeed	90° transfer	Palletizer	Loading docks	Tissue transport	Book binding	Mail segregator inclines	Bulk mail handling	Parcel handling	Tray and bag transport
<b>0.3" pitch belting</b>																					
M0870	Micropitch Flat Top									POM							POM	POM	POM	POM	
<b>0.5" pitch belting</b>																					
M1220	Flat Top		POM	POM	POM	POM	POM			POM	POM	POM	POM	POM			POM		POM	POM	
M1220	GripTop																PP				
M1230	Flush Grid		POM	POM	POM	POM	POM			POM	POM	POM	POM	POM			POM				
HDS605	Flat Top		POM	POM	POM	POM	POM			POM	POM	POM	POM	POM			POM		POM	POM	
SM605	Flush Grid		POM	POM	POM	POM	POM			POM	POM	POM	POM	POM			POM				
SM605	GripTop																PP				
<b>0.75" pitch belting</b>																					
106	Flat Top															POM					
<b>1" pitch belting</b>																					
M2420	Flat Top		POM	POM	POM		POM	POM	POM	POM	POM	POM	POM						POM	POM	POM
M2470	Flat Top		POM	POM	POM		POM	POM	POM	POM	POM	POM	POM						POM	POM	POM
M2470	GripTop																		POM		
M2480	Flush Grid		POM	POM	POM		POM	POM	POM	POM	POM	POM	POM								
M2520	Flat Top		POM	POM	POM		POM	POM	POM	POM	POM	POM	POM						POM	POM	POM
M2520	GripTop																		POM		
M2540	Radius Flush Grid																				POM
M2544	Tight Radius																				POM
M2620	Flat Top Heavy Duty							POM		POM	POM	POM									POM
M2620/70	GripTop																				POM
M2670	Flat Top Heavy Duty							POM		POM	POM	POM									POM
M2791	Radius Flush Grid MTW																POM				
208	Flat Top		POM	POM	POM		POM	POM	POM	POM	POM	POM	POM						POM	POM	POM
ST610	Flat Top		POM	POM	POM		POM	POM	POM	POM	POM	POM	POM						POM	POM	POM
VT610	Vented Top																		POM		
208-35	Flush Grid		POM	POM	POM		POM	POM	POM	POM	POM	POM									
MB610	Flat Top							POM		POM	POM	POM									POM

# Applications using HabasitLINK® belts

## Corrugated cardboard, printing, paper, postal

Belt code	Belt style	Corrugated cardboard								Printing and paper							Postal					
		Paperroll transport	Down stacker	Transfer cart	Stack handling/buffer	90° transfer	Strap feed	Palletizer	Casemaker feeder	Printing machine outfeed	Stacker outfeed	Wrapping machine outfeed	90° transfer	Palletizer	Loading docks	Tissue transport	Book binding	Mail segregator inclines	Bulk mail handling	Parcel handling	Tray and bag transport	
<b>1.5" pitch belting</b>																						
M3840	Radius Flush Grid																				POM	
M3843	Tight Radius																					POM
M3843	Tight Radius GripTop																					POM
M3892	Raised Deck																					POM
IS615	Radius Flush Grid																					POM
<b>2" pitch belting</b>																						
M5020	Flat Top Heavy Duty													POM	POM		POM					
M5032	Flush Grid Heavy Duty													POM	POM		POM					
MB620	Flat Top													POM	POM		POM					
<b>2.5" pitch belting</b>																						
M6420	Flat Top Heavy Duty	POM																				
M6425	Reel Top	POM																				

# Applications using HabasitLINK® belts

## Beverages and bottling, can manufacturing

Belt code	Belt style	Beverages and bottling										Can manufacturing				
		Can palletizing/depalletizing	Glass palletizing/depalletizing	PET palletizing/depalletizing	Mass conveyance cans	Mass conveyance glass	Mass conveyance PET plastic	Single file lines – all products	Pasteurizers/warmers	Shrink wrapping	Accumulation tables	Mass conveyance	Vacuum applications	Washer infeeds	Washer holddown	Accumulation tables
<b>0.3" pitch belting</b>																
M0870	Micropitch Flat Top	POM	POM	POM	POM	POM	POM					POM				POM
<b>0.5" pitch belting</b>																
M1220	Flat Top	POM	POM	POM	POM	POM	POM					POM	POM			POM
M1220	ActivXchange	POM	POM	POM	POM	POM	POM	POM				POM	POM			POM
M1230	Flush Grid	POM	POM	POM	POM		POM				POM			POM		POM
M1280	ActivXchange	POM	POM	POM	POM	POM	POM	POM				POM	POM			POM
HDS605	Flat Top	POM	POM	POM	POM	POM	POM				POM	POM				POM
SM605	Flush Grid	POM	POM	POM	POM		POM				POM			POM		POM
<b>0.75" pitch belting</b>																
106-V	Vacuum															POM
<b>1" pitch belting</b>																
M2420	Flat Top	POM	POM	POM	POM	POM	POM					POM				POM
M2420	ActivXchange	POM	POM	POM	POM	POM	POM	POM				POM	POM			POM
M2470	Flat Top	POM	POM	POM	POM	POM	POM					POM				POM
M2470	ActivXchange	POM	POM	POM	POM	POM	POM	POM				POM	POM			POM
M2472	Perforated Flat Top													POM		
M2480	Flush Grid	POM	POM	POM	POM		POM					POM				POM
M2480	ActivXchange	POM	POM	POM	POM	POM	POM	POM				POM	POM			POM
M2520	Flat Top	POM	POM	POM	POM	POM	POM	POM				POM				POM
M2531	Raised Rib	POM	POM						PP			POM				POM
M2533	Flush Grid	POM			POM			POM				POM			POM	POM
M2585	Flush Grid									PA +GF						
M2620	Flat Top Heavy Duty	POM	POM	POM	POM	POM	POM	POM				POM				POM
M2620	Low Back Pressure											POM				POM
M2670	Flat Top Heavy Duty	POM	POM	POM	POM	POM	POM	POM				POM				POM
M2670	ActivXchange	POM	POM	POM	POM	POM	POM	POM				POM	POM			POM
208	Flat Top	POM	POM	POM	POM	POM	POM					POM				POM
ST610	Flat Top	POM	POM	POM	POM	POM	POM					POM				POM
208-35	Flush Grid	POM	POM						PP			POM				POM
MB610	Flat Top	POM	POM	POM	POM	POM	POM	POM				POM				POM
<b>1.1" pitch belting</b>																
F51	Flat Wire											PA +GF				PP
F52	Smart Fit Flat Wire											PA +GF				
<b>2" pitch belting</b>																
M5131	Raised Rib		PP							PP		PP				PP

# Applications using HabasitLINK® belts

## Glass manufacturing, PET manufacturing

Belt code	Belt style	Glass manufacturing				PET manufacturing				
		Single file lines	Accumulation tables	Shrink wrapping	Palletizing	Cooling	Conditioning	Elevator	Shrink wrapping	Palletizing
<b>0.3" pitch belting</b>										
M0870	Micropitch Flat Top		POM	POM						
<b>0.3" pitch belting</b>										
M1220	Flat Top		POM	POM						POM
M1220	ActivXchange	POM	POM							
M1230	Flush Grid		POM	POM						POM
M1280	ActivXchange	POM	POM							
HDS605	Flat Top		POM	POM						POM
SM605	Flush Grid		POM	POM						POM
<b>1" pitch belting</b>										
M2420	Flat Top	POM	POM	POM						POM
M2420	ActivXchange	POM	POM							
M2470	Flat Top	POM	POM	POM						POM
M2470	ActivXchange	POM	POM							
M2480	Flush Grid		POM							
M2480	ActivXchange	POM	POM	POM						
M2520	Flat Top	POM	POM	POM				PP POM		
M2531	Raised Rib		POM			POM				POM
M2533	Flush Grid		POM			PP POM	PP POM	PP POM		POM
M2585	Flush Grid			PA +GF						PA +GF
M2620	Flat Top Heavy Duty	POM	POM	POM						POM
M2620	Low Back Pressure		POM							
M2670	Flat Top Heavy Duty	POM	POM	POM						POM
M2670	ActivXchange	POM	POM							
208	Flat Top		POM	POM						POM
ST610	Flat Top		POM	POM						POM
208-35	Flush Grid	POM	POM	POM		PP POM	PP POM	PP POM		POM
MB610	Flat Top		POM							POM
<b>1.1" pitch belting</b>										
F52	Smart Fit Flat Wire			PA +GF						PA +GF

## Snap Fit

Snap Fit rod retaining is used with a wide range of Habasit modular belts. The rod head is round and allows the rods to be inserted with a hammer. It can be extracted using a punch and hammer from the


opposite side (secure the module edge to avoid link breakage) or using a special extraction tool available from Habasit, or a narrow side cutter. For open hinged belts, cut off the retainer ring for easy extraction.



## Smart Fit (standard, with rod head)



Smart Fit retaining is used for many product designs.

The rod head is octagonal shaped. It allows easy assembly and disassembly using a simple screwdriver. Do not punch out rod with a hammer.

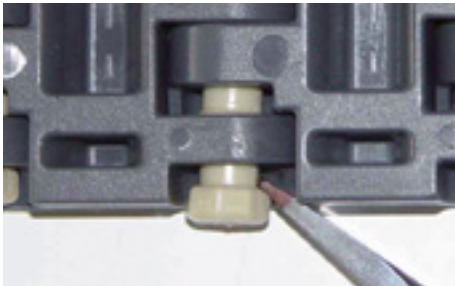


## Smart Fit headless

Headless Smart Fit rods are used to make particularly strong belt edges. Disassembly is from underneath using a screwdriver, or with a punch and hammer from the opposite side.

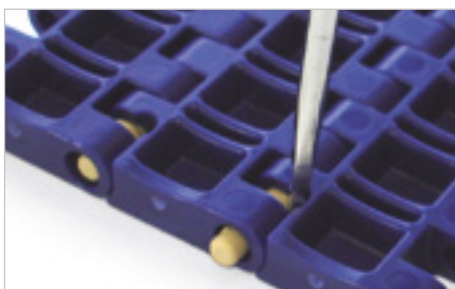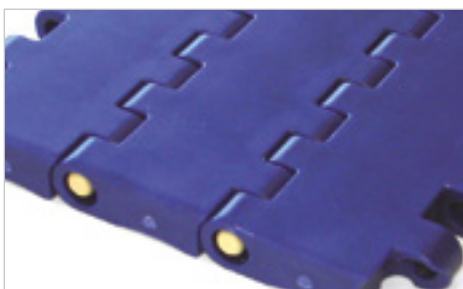

## Plug retained

Some belts are equipped with headless rods. Plugs are installed on both edges of the belt to retain the rods.

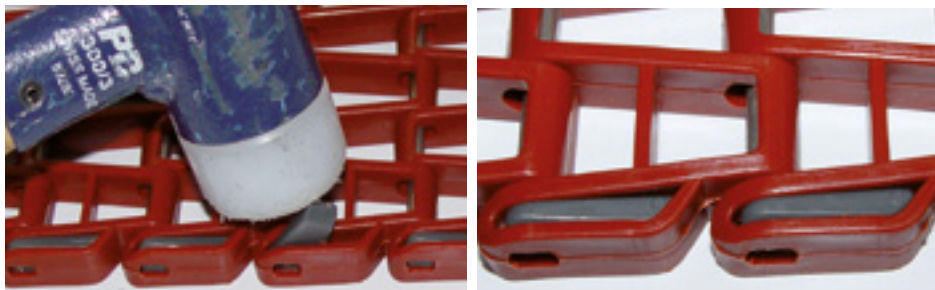


## Tapered pin

These are used to allow a tight radius for RS511 and 515 belts.



## Habasit Saniclip

Available for certain belt types. Used for quick belt opening and closing.

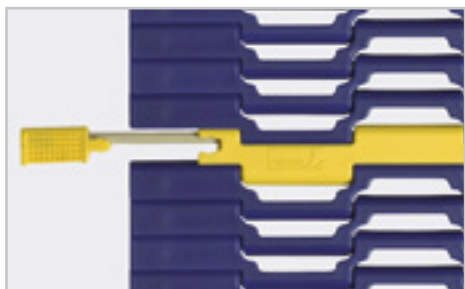



Evaluate the desired belt style	→ Refer to the application table
Evaluate the most suitable material	→ Refer to the tables of material properties from pages 17 and 80, and product data sheets
Evaluate the design concept	→ Refer to the design guide in this manual and draft the layout of your equipment
Calculate the belt tensile force, power requirements and shaft sizes	→ Refer to the LINK-SeleCalc belt strength calculation program

We advise using the LINK-SeleCalc program for belt evaluation and calculation.

Please contact your Habasit representative for installation and **register on <https://selecalc.habasit.com/Default.aspx>**

## Sprocket compatibility

Belt code	Sprocket Series M0800	Sprocket Series M1000	Sprocket Series M1100	Sprocket Series M1200	Sprocket Series SM/CM605	Sprocket Series HDS605	Sprocket Series RS511/515	Sprocket Series M2400	Sprocket Series M2500	Sprocket Series M2500-C2	Sprocket Series M2600	Sprocket Series IS610	Sprocket Series ST/VT610	Sprocket Series HDS610	Sprocket Series 208	Sprocket Series MB610	Sprocket Series F51/F52/F53	Sprocket Series F54	Sprocket Series PR612	Sprocket Series M3300	Sprocket Series M3800	Sprocket Series SP/IS615	Sprocket Series ST/VT615	Sprocket Series CC40	Sprocket Series M5000	Sprocket Series M5100	Sprocket Series M5200	Sprocket Series SP/SE/IS620	Sprocket Series HDS620	Sprocket Series HDU620	Sprocket Series FF620	Sprocket Series MB620	Sprocket Series PR620	Sprocket Series PR620SPS			
Series M0800	●																																				
Series M1000		●																																			
Series M1100			●																																		
Series M1200				●																																	
Series SM/CM605					●																																
Series HDS605						●																															
Series RS511/515							●																														
Series M2400								●																													
Series M2500 (excluding M2585 and M2586)									●																												
Belt types M2585/M2586									⊙	●																											
Series M2600										●																											
Series IS/CT610											●																										
Series ST/VT610												●																									
Series HDS610													●																								
Series 208															●																						
Series MB610																●																					
Series F51/F52/F53																	●																				
Series F54																		●																			
Series PR/RP612																			●																		
Series M3300																				●																	
Series M3800																					●																
Series SP/IS615																						●															
Series ST/VT615																							●														
Series CC40																								●													
Series M5000																									●												
Series M5100																										●											
Series M5200																											●										
Series SP/SE/IS620																												●									
Series HDS620																													●								
Series HDU620																														●							
Series FF620																															●						
Series MB620																																●					
Series PR620																																			●		
Series PR620SPS																																				●	

Recommended ● Possible to use ⊙ Limited use ○  
For detailed information please contact Habasit

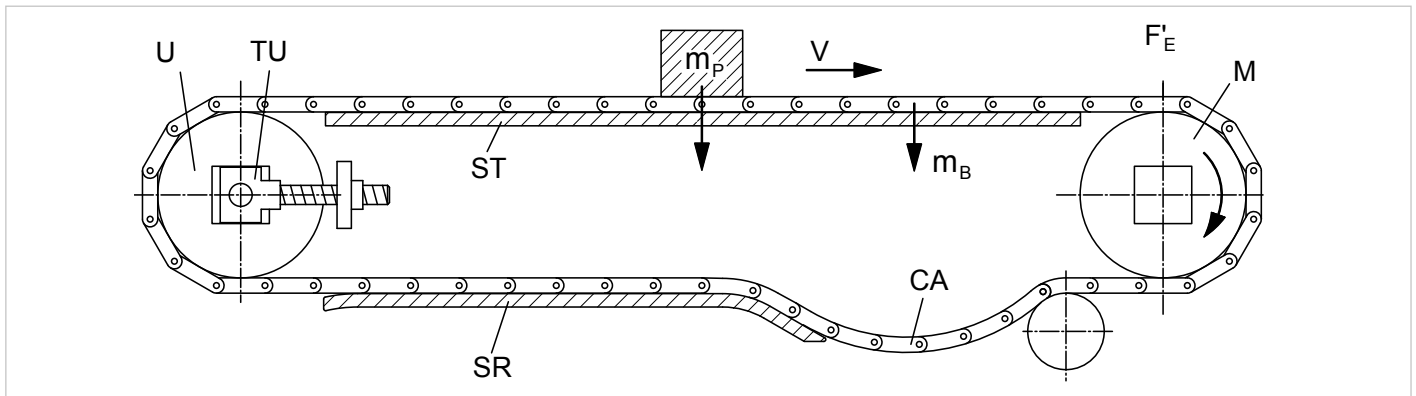


Figure 30

- M Driving shafts** can be square or round. Square shafts allow the sprockets to move easily on their shaft to follow the thermal expansion or contraction of the belt. In addition, square shafts allow higher transmission of torque. The center sprocket is usually fixed for tracking of the belt.
- U Idling shafts** can be equipped with sprockets, coated drums, steel rollers or plastic discs. The center sprocket is usually fixed for tracking of the belt. Alternative tracking methods are required if no sprockets are used.
- ST Slider supports on the transport side**, with parallel or V-shaped wear strips carry the moving belt and load.
- SR Belt support on the return way** can be equipped with rollers or longitudinal wear strips (slider support).
- CA Catenary sag** is an unsupported length of belt after the drive sprockets. Its weight provides a small amount of tension to drive sprockets in order to engage the belt properly and absorb belt length variations due to thermal expansion, load changes, belt wear and belt tension. Long conveyors can be equipped with several pockets for catenary sags.
- TU Take-up device** for adjustment of the catenary sag, which may be screw type, gravity or pneumatic type.
- F'<sub>E</sub> Effective tensile force (belt pull)** is calculated near the driving sprocket, where in most cases it reaches its maximum value during operation. It depends on the friction forces between the belt and the supports (ST) (SR) as well as friction against the accumulated load.
- v Belt speed:** Applications exceeding 50 m/min (150 ft/min) negatively affect the life expectancy of the belt. For speeds higher than 50 m/min always consult a Habasit specialist. Belt modules moving around a sprocket cause the belt speed to vary. The rod travels on the pitch diameter of the sprocket, while the middle of the module moves through the smaller chordal radius. The **polygon effect** is also called **chordal action**. The amount of variation in speed depends exclusively on the number of sprocket teeth. The higher the number of teeth, the smaller the speed variation.
- m<sub>P</sub> Conveyed product weight** as expected to be distributed over the belt surface; calculated average load per  $m_2$  (ft<sub>2</sub>).
- m<sub>B</sub> Belt mass (weight)** is added to the product mass to calculate the friction force between the belt and the slider frame.

For a glossary of terms see page 88, Appendix.

# Design guide

## Horizontal conveyors – basic design

Conveyors using plastic modular belts must adhere to basic dimensional requirements. Along with the design guidelines presented in this manual, note also that all leading edges of the conveyor framework and wear strips must have a smooth radius. Screws and nuts must not be placed in the path of belt travel. Soft starts and stops are recommended for speeds above 15 m/min (50 ft/min) and in cases where the belt pull exceeds more than 50% of the admissible belt force. All conveyor layouts should be confirmed for acceptable belt pull levels using the LINK-SeleCalc program.

Modular belts typically change their length under varying operational conditions, including temperature, load and wear. The extra belt length is accommodated by providing an unsupported section of the return way for catenary sag (for calculation see page 75). To maximize its effectiveness, the first catenary sag should be positioned after the drive unit.

The design of the conveyor frame depends on the total belt length. In general the catenary sag(s) or a belt take up unit should be able to compensate approx. 1% – 3% (dependent on belt service interval) of the total belt length.

**Short conveyors** (maximum 2 m (6 ft)) (Fig. 40)  
In this case belt support on the return side can be omitted. Observe the catenary sag height while the conveyor is running.

**Medium length conveyors** (2 to 4 m (6 to 12 ft)) (Fig. 50)  
Common design; the belt is supported by a slider frame (SR) or wear strips on the return way. Rollers (R1) can be used as well. A catenary sag near the driving sprockets is sufficient for moderate temperature changes.

**Long conveyors** (over 4 m (12 ft)) (Fig. 60)  
Longer lengths and greater temperature changes require more than one section for catenary sag. In this case vary the roller spacing (e.g. 1200/900/1200/900 ...).

Admissible speeds of long conveyors:

Length	Max. speed
Up to 15 m (50 ft)	50 m/min (150 ft/min)
15 – 25 m (50 – 75 ft)	30 m/min (90 ft/min)
Over 25 m (75 ft)	15 m/min (45 ft/min)

For speeds higher than 50 m/min (150 ft/min), always consult a Habasit specialist.

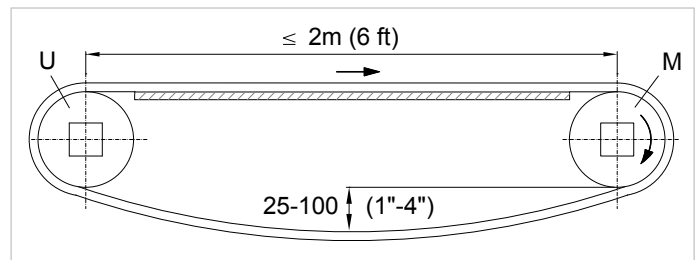


Figure 40

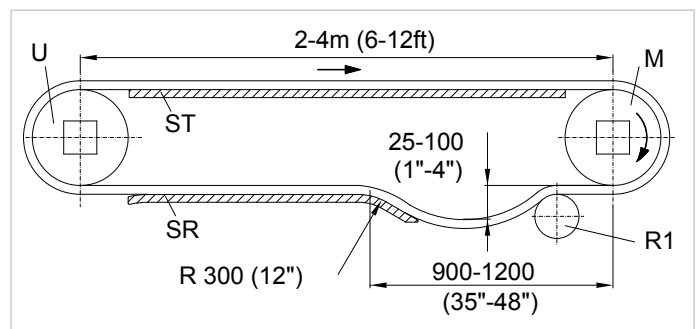


Figure 50

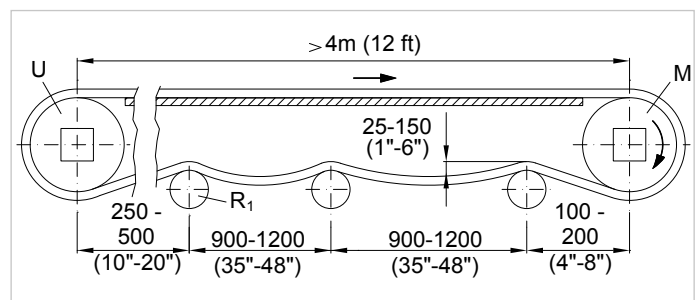


Figure 60

# Design guide

## Horizontal conveyors – basic design

### Gravity take-up (Fig. 80)

If there is insufficient length for a catenary sag and/or for heavily loaded long belts and/or high speeds (over 50 m/min) and/or with frequent starts, the catenary sags may not sufficiently tension the belt to prevent sprockets from disengaging. In such cases gravity take-up (G) can be a solution.

The required gravity roller weight depends on the conveyor design. It must provide a small amount of belt tension at the position where the belt leaves the drive sprockets.

### Gravity roller diameter

As a general rule, for belt pitches below 1.5", a roller diameter (R<sub>2</sub> and R<sub>3</sub>) of 100 mm (4") is required. For belts with pitches equal to or greater than 1.5" a diameter of 150 mm (6") is recommended. For most belts the recommended diameter is indicated on the product data sheet.

Recommended tensioner weight for gravity rollers placed close to the drive sprockets:

Belt type	Tensioner weight per m (ft) belt width
For 0.3" belts	10 kg/m (7 lb/ft)
For 0.5" and 1" belts	15 kg/m (10 lb/ft)
For 1.5" and 2" belts	20 kg/m (14 lb/ft)
For 2.5" belts	25 kg/m (17 lb/ft)

### Roller supports

Roller return way supports are most often used for modular plastic belts. Rollers (R<sub>1</sub>) can be made of heavy walled plastic, plastic covered steel, or steel. Plastic rollers are recommended when animal fats or vegetable oils are present. These two substances can cause the mill finish to be leached from steel rollers, leading to product contamination. For smooth operation, the recommended minimum roller (R<sub>1</sub>) diameter needs to be:  
 2" (50 mm) for a belt pitch less than 1"  
 3" (76 mm) for a belt pitch from 1 to 1.5"  
 4" (101 mm) for a belt pitch greater than 1.75"

**Multiply the diameter by 1.5 for curve-top belts**

Caution: For safety reasons, adjustments to catenary sag or gravity take-up must be performed when the conveyor has stopped and the system controls have been securely locked out.

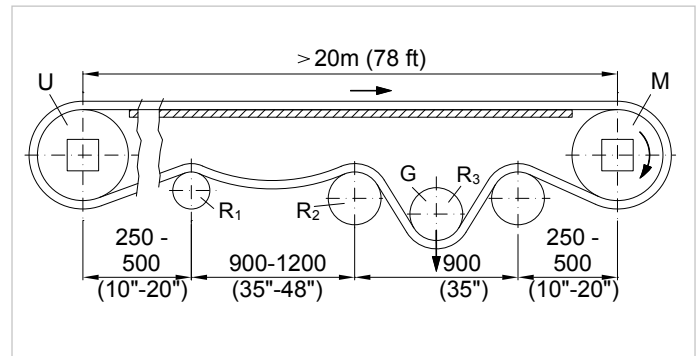


Figure 80

### Adding or removing single module rows

Regardless of the return way design a conveyor builder chooses to use, it may be necessary to make length adjustments to the belt during initial installation or a break in operation. Removing rows of belt modules is required when the system can no longer accommodate excess belt. The addition of rows of belts may be required for cold temperature applications if provisions have not been made to counteract thermal contraction in belt length. Consult the chapter on effective belt length and width in the calculation section of this guide.

# Design guide

## Horizontal conveyors – basic design

Parallel shafts are essential for trouble-free straight conveying. Proper shaft alignment is confirmed by ensuring equal values for diagonal  $AD = BC$  (Fig. 90)

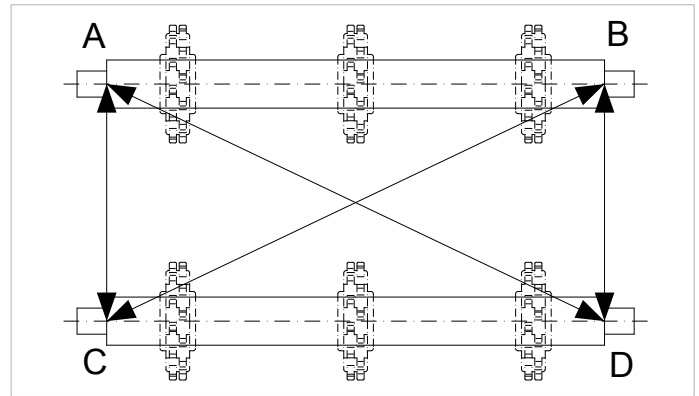


Figure 90

$E = F$  (shaft must be horizontal). (Fig. 100)

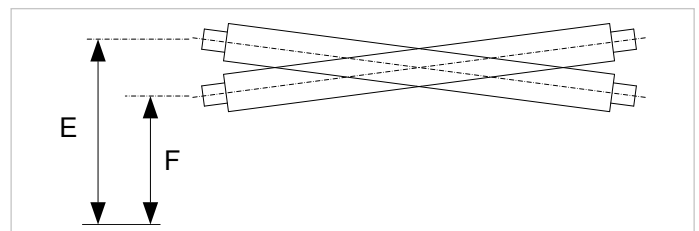


Figure 100

### Tracking (Fig. 110)

The center-most locked sprocket on the drive and idle shaft must be located in the same lateral position  $A = B$ .

Exception: For the F50 Series the drive and idle sprockets are not placed in identical lateral shaft positions. Consult the Appendix, page 93.

Note: Intermediate idler shafts like those used on inclined "Z" conveyors should not use a locked center sprocket.

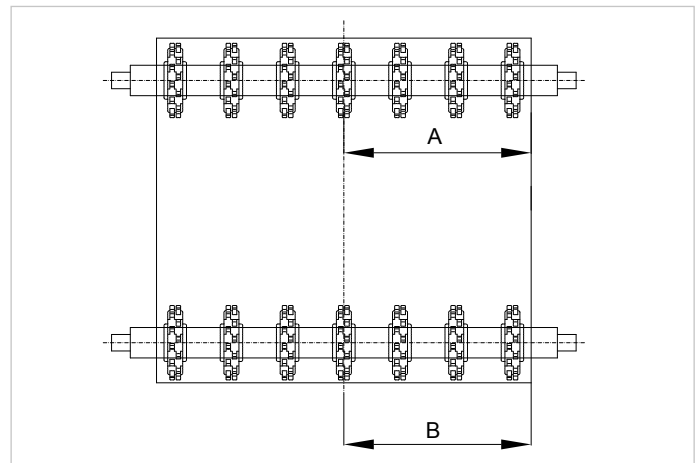


Figure 110

### For all drive configurations

Slider support on the return way, or alternatively rollers.  
For proper sprocket engagement maintain an approx. 180°–200° arc of contact.

- **Uni-directional drive (Fig. 120)**

One motor (M) at the conveyor end, pull action (driving sprockets are pulling the belt). Catenary sag (CA) only required at the drive end.

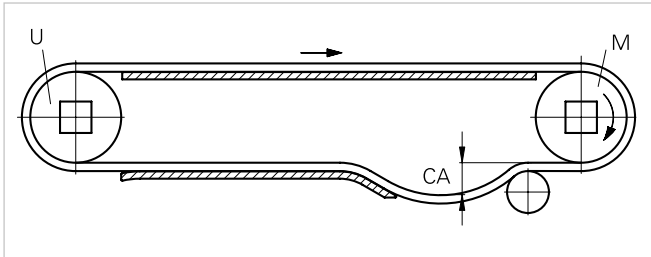


Figure 120

- **Lower head drive (Fig. 130)**

For tight transfers with a nosebar or with small idling rollers the motor with the drive shaft can be arranged as illustrated. Catenary sag length must be approx. two times the belt in the drive configuration, transfer roller to snub roller. The angle of belt wrap at the sprockets should be approx. 200°. For further nosebar configurations see also page 68.

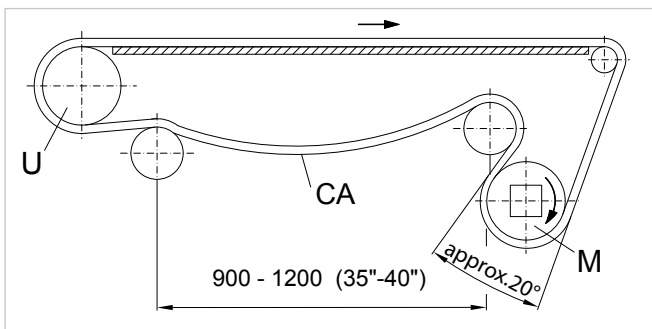


Figure 130

- **Bi-directional drive (no Fig.)**

Two motors (M), one at each conveyor end. Only one motor is pulling, the other motor remains disengaged (clutch). Catenary sag (CA) at both conveyor ends.

- **Bi-directional center drive (Fig. 140)**

Only one motor (M) is placed approx. in the middle of the belt return path. At the drive sprockets the angle of belt wrap should be approx. 200°. Therefore the distance from the shaft center to roller R2 should not be too large, but for small sprockets approx. three times and for large sprockets approx. six times belt pitch. For short conveyors, the belt return path can be

designed longer by adding additional rollers below the transfer roller, or gravity take-up rollers may be used for positive sprocket engagement. Center drives are not recommended for radius applications.

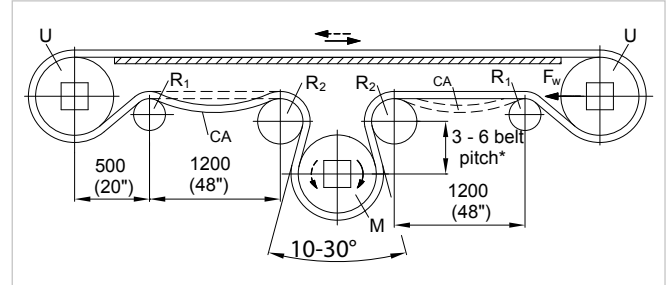


Figure 140

Since the driving force is applied on the return way of the belt, the shaft load will be two times the calculated belt pull:

$$F_w = 2 \cdot F'_E \text{ (see also calculation guide page 73).}$$

### Bi-directional conveyor and pusher drive (push/pull action) (Fig. 150)

It is possible to apply one head drive motor for bi-directional reversible driving. Push-pull drives are recommended for short, slow and lightly loaded applications only.

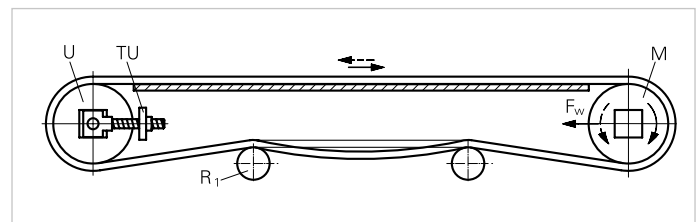


Figure 150

For reverse driving (push action = pusher drive), a screw type take-up (TU), or a spring or pneumatic tensioning device with 110% pretension of the expected belt load is recommended. The shaft load will increase to:

$$F_w = 2.2 \cdot F'_E \text{ (see also calculation guide page 73).}$$

In case of a bi-directional pusher drive with tensioning device, the shaft load can increase to:

$$F_w = 3.2 \cdot F'_E \text{ (see also calculation guide page 73).}$$

For the design of elevating conveyors, the following basic rules have to be considered:

- M The driving shaft** must be located at the top end of the conveyor or in a center-driven design.
- ST Slider supports** on the transport side with parallel, serpentine or chevron wear strips.
- SR Slider supports** are preferred. For the majority of elevating conveyor applications, flights and/or side guards are used. In these cases belt edge slider supports are necessary.
- SF** Belts with flights wider than 600 mm (24") have to be carried in the middle by a slider support strip (parallel or serpentine). (Figs. 155, 160, section X – X).
- CA Catenary sags** follow the same working principle as for horizontal belts, but in most cases are positioned at the lower end of the belt (see also page 46).
- SH Hold-down support shoes** are placed at the belt indents and for most belts the radius must be  $\geq 150$  mm (6"). Exceptions are:  
 HDS620; HDSVT620; HDSEZR620  $\rightarrow$  250 mm (10")  
 HDSCT620  $\rightarrow$  300 mm (12")  
 ST620; FF620; FF620-MC  $\rightarrow$  203 mm (8")  
 FF620-WR  $\rightarrow$  250 mm (10")  
 The radius should, however, be selected to be the largest possible. For belts equipped with side guards, the minimum shoe radius (backbending radius) has to be 250 mm (10"). Fluid flow requires a 609 mm (24") radius. Recommended minimum indents are 25 mm (1") for belts up to 300 mm (12") width, 42 mm (1.5") up to 450 mm (18") width, and 50 mm (2") for wider belts. For standard indents consult the product data sheets.
- TU** Since with inclined conveyors the catenary sag (CA) may be close to the floor, it is recommended to install a **screw or spring type take-up** belt tensioner (TU) at the lower conveyor end (idle shaft U). More information on the minimum roller diameter and backbending radius (hold-down and support shoes) is in the Appendix.

### Example of a straight inclined conveyor

**l<sub>c</sub>** 900 mm to 1200 mm (35" to 48")

**SR** For flighted belts the slider support on the return way can be equipped with wear strips at the belt edges (see Fig. 155 below, section X – X).

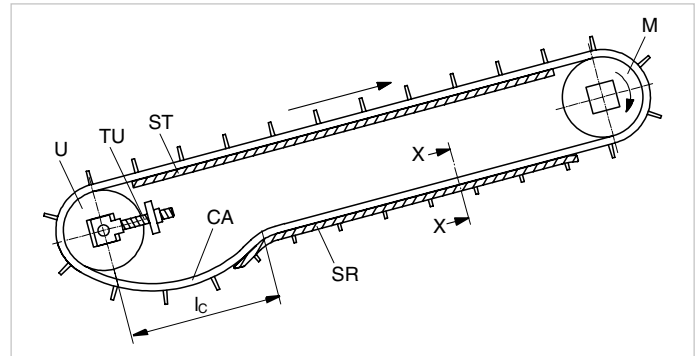


Figure 155

### Example of inclined conveyor with horizontal end sections (Fig. 160)

**l<sub>c</sub>** 900 mm to 1200 mm (35" to 48")

If the length of the horizontal section is longer than 1200 mm (48"), slider supports are recommended.

- SR** For flighted belts the slider support on the return way can be equipped with wear strips at the belt edges (see section X – X).
- U** Consider using wheels, a drum or scroll on the idle if the system is submerged in water or if debris is expected to be present between the belt and the sprockets.
- UT** To reduce system loading, excessive belt or carry way wear, Habasit recommends the use of sprockets, wheels or rollers at the upper transition point. If sprockets are used, all sprockets should float laterally on the shaft.

All transfer chutes, framework and drip pans must be clear of flights and sideguards. Internal rollers, shoes or wheels have a minimum diameter of 75 mm (3").

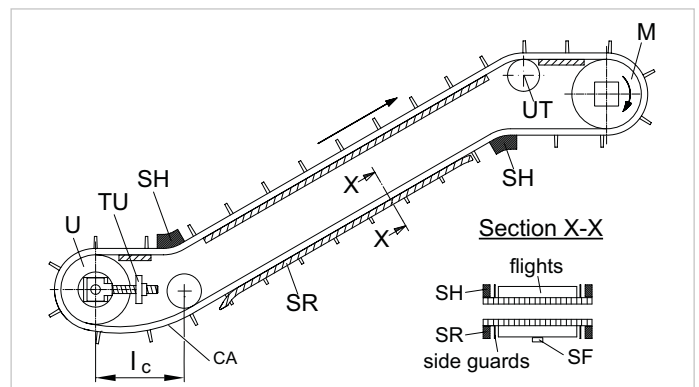


Figure 160

### Backbending on elevators (Z-conveyors)

Elevators are usually equipped with flights. Therefore for backbending of Z-conveyors hold-down shoes (SH) or rollers are used at the belt edge only. A hold-down device in the center of the belt, acting from the top, is only possible by leaving a gap in the center of the flight row. In most cases this is not possible or not desirable. The belt tension creates lateral bending forces in the backbending area. Depending on the load and the stiffness of the belt, wide belts tend to buckle. Here are some solutions and recommendations:

#### a) Z-conveyors (Fig. 170)

The applicable belt width without hold-down device in the middle of the belt is limited. The limits depend on the following criteria:

- Length of belt before backbending
- Load on belt before backbending
- Type of belt (belt thickness, module length, lateral belt stiffness)
- Inclination angle  $\alpha$

Precise calculation of the allowable belt width is very complex. Therefore a simplified general rule for dimensioning and design of the conveyor frame is provided (see the table opposite).

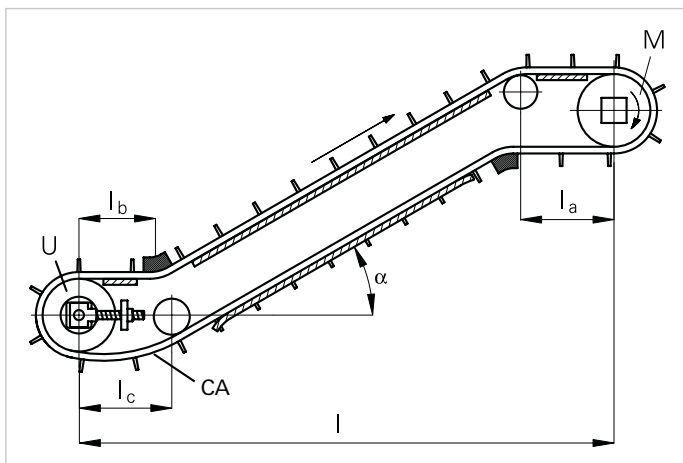


Figure 170

Keep section  $l_b$  as short as possible. Long straight section  $l_b$  will increase the forces in hold-down devices. For higher speeds please contact your Habasit representative.

#### b) Z-conveyors with center hold-down devices (Figs. 180 and 190)

Hold-down devices are available for 1" and 2" belts (see also the product data sheet).

For wide belts larger than 2 m (80"), two tracks of hold-down devices, positioned at 1/3 and 2/3 of the belt width, are recommended.

For guides use steel strips. Min. backbending radius  $R = 500 \text{ mm (20")}$ .

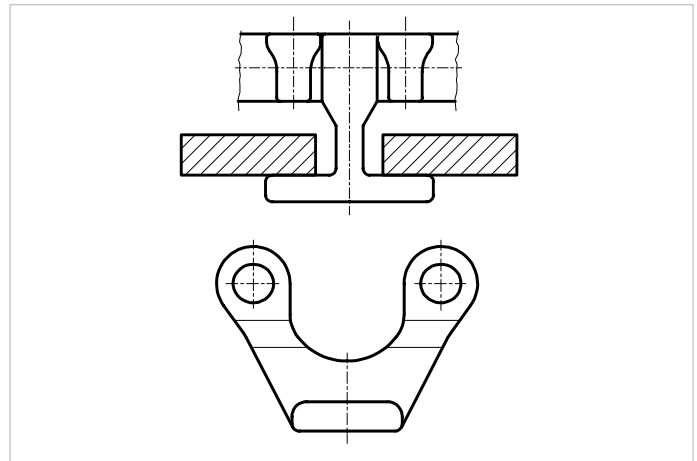


Figure 180

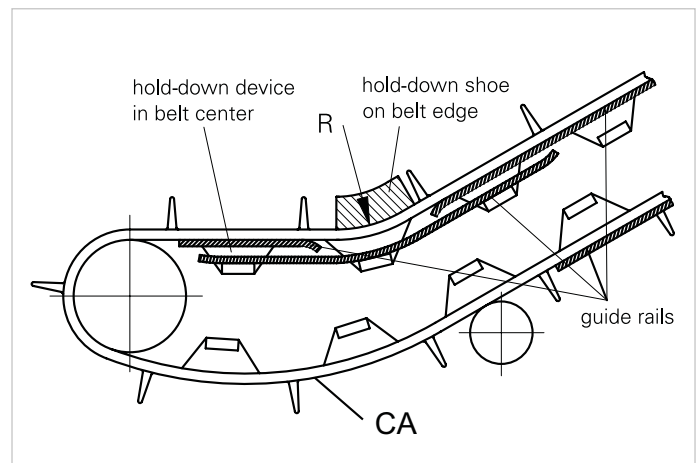


Figure 190



# Design guide

## Elevating conveyors

The following table considers an admissible deflection of 1% of max. belt width  $b_0$  for POM and PP belts and 2% for PE belts:

Max belt width $b_0$ mm ( <i>inch</i> ) for speeds < 30 m/min	2" and 2.5" belts		1" and 1.5" belts				0.5" belts	
			M2520 and 1.5" belts		Other 1" belts			
Belt load	< 50%	50–100%	< 50%	50–100%	< 50%	50–100%	< 50%	50–100%
<b>For inclination <math>\alpha &lt; 50^\circ</math></b>								
$l_b \leq 800$ mm (32") (possibly self-adjusting belt tensioner needed!)	1500 59	1000 39	1200 47	800 32	800 32	600 24	700 28	500 20
$l_b = 800$ to 2000 mm (32" to 78") (longer sect. $l_b$ not recommended)	1200 47	800 32	1000 39	600 24	600 24	500 16	550 22	400 16
<b>For inclination <math>\alpha \geq 50^\circ</math></b>								
$l_b \leq 800$ mm (32") (possibly self-adjusting belt tensioner needed!) (longer sect. $l_b$ not recommended)	1050 41	700 28	850 33	550 22	550 22	400 16	500 20	350 14

### Catenary sags for elevators

For proper engagement of the sprockets on the drive shaft (drive at discharge end), the belt must be kept under tension when it leaves the sprocket to the return side (back-tension). This can be achieved by a catenary sag of 900 to 1200 mm (35" to 50") in length. The position of the catenary sag depends on the inclination angle  $\alpha$ , the friction value between the belt and return base, and the length of the horizontal sections.

If the inclination angle exceeds a certain value, the belt will slip on its base downwards towards the lower end. In this case the catenary sag needs to be installed at the lower belt end. This is the case for most inclined conveyors. It is possible to specifically calculate this critical point for every conveyor design. In most cases it may be sufficient to follow the rules below.

### Catenary sag on the lower conveyor end

Condition A:  $l_c \geq 900$  mm (35") and  $l_a \leq 900$  mm (35") (must always be fulfilled)

Condition B:

Friction value $\mu_6$	< 0.15	0.15–0.2	0.2–0.3
angle $\alpha$	> 12°	> 16°	> 20°

In cases where  $l_c < 900$  mm (35"), or the above conditions for inclination  $\alpha$  cannot be maintained, no catenary sag on the lower end is recommended. In this case maintain  $l_a \geq 900$  mm (35") and place the catenary sag on the upper end.

For all other cases please contact your Habasit representative.

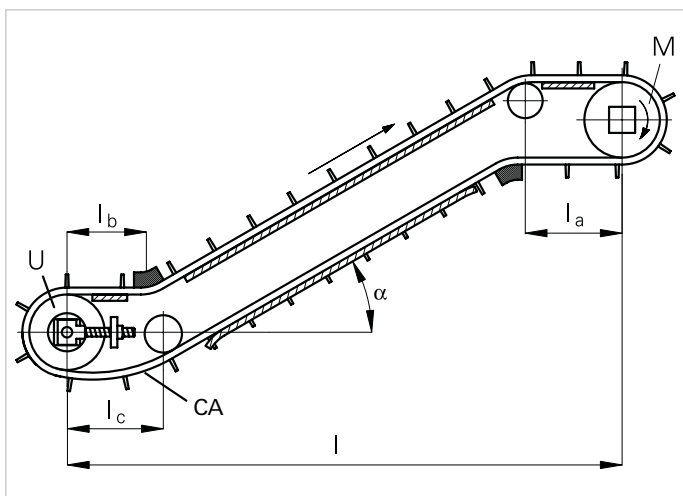


Figure 170: Standard concept: catenary sag on lower end

### Elevators without catenary sag (Fig. 200)

On Z-conveyors catenary sags may not be accepted either on the upper or lower horizontal belt section. This may be due to lack of space under the bottom conveyor end, or if the horizontal sections are too short.

A tensioning device with fixed adjustment to the belt length is not acceptable, since wear and temperature variations cause the belt length to change. It is strongly recommended to use a self-adjusting tensioner device. This can be a soft spring type, gas-loaded spring, or pneumatic tensioner type.

The optimal layout of the spring or pneumatic cylinder depends on the belt type, conveyor width and temperature conditions. The minimum free movement of the tensioner must be at least 20% more than the calculated belt elongation between the lowest and highest process temperatures. Belt elongation due to abrasion should also be considered.

The force should be as low as possible, but high enough to overcome any friction forces on the belt on its return way, to straighten it and engage the sprockets safely. As a general rule the following tensioner force is recommended:

Belt type	Tensioner force per m (ft) of belt width
0.5" and 1" belts	150 N (10 lbf)
1.5" and 2" belts	300 N (20 lbf)
2.5" belts	350 N (23 lbf)

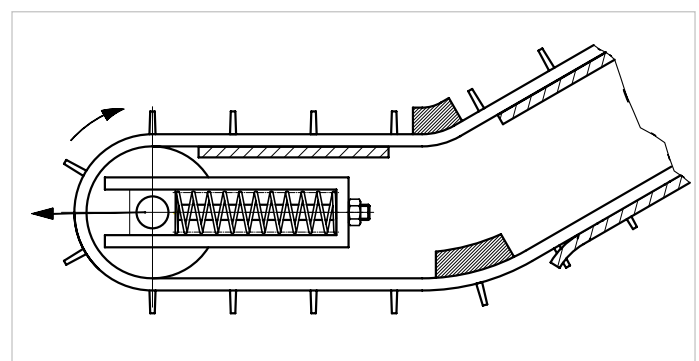


Figure 200

# Design guide

## Elevating conveyors / Roller top

### Special case decline (Fig. 210)

For configuration with a decline transport and minus torque result (using LINK-SeleCalc) the drive motor can be placed at the upper end. A take-up unit providing slight dynamic tension at the tail shaft ensures proper belt operation with and without load.

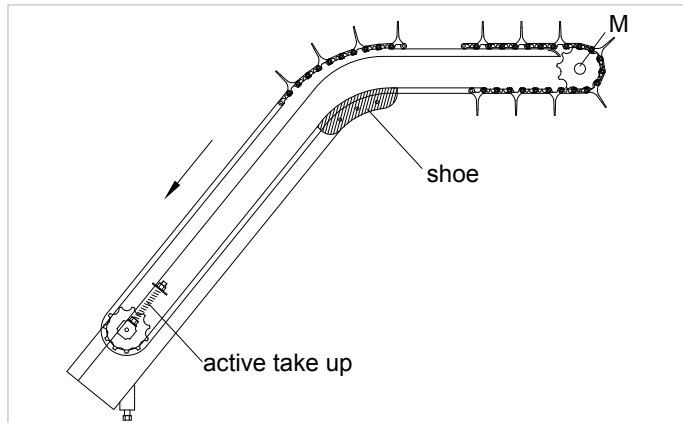


Figure 210

### Roller top and low back pressure (LBP) belts

Roller top belts are available as a wide selection of straight and radius belts. Certain roller top belts have a standard roller top pattern (consult the product data sheet), others are designed to specific application requirements. Rollers can be configured into a belt using the retractable flight to provide product elevation and accumulation, all with one belt. When considering the use of a roller belt:

- Lateral roller spacing needs to provide room for sprocket engagement areas.
- The carry way support rails are positioned:
  - between the rollers for accumulation applications
  - underneath the rollers for accelerating the product along the belt surface
- Use shoes or wheels in the return way portion of straight and radius conveyors.
- Radius return way rails through curves are positioned to be in contact only with the plastic portion of the belt.

The following information applies to all radius belts with the exception of tight radius belts RS511 and RS515. For these belts please contact Habasit application support for specific guidelines.

### Basics (Fig. 235)

Radius belts create pressure against the guide on the inner side of the curve. At the same time they tend to lift off from the support on the curve outside. This tendency increases with rising tension, increasing speed, and increasing angle. Therefore the design of radius belts requires special attention to the following rules.

- R** The minimum inner curve radius  $R$  is defined by the collapse factor  $Q$  of a particular radius belt:

$$R_{\min} = Q \cdot b_0$$

$Q$  depends on the belt width, see the product data sheet.

For optimal running conditions, design the curves  $R$  of the conveyor near to the minimum radius.

Deviations of more than  $+0.3$  of the collapse factor can lead to undesirable belt vibrations. Never go below the indicated collapse factor.

- $l_0$**  Proper tensioning of the belt in operation requires a catenary sag. For this reason the belt section  $l_0$  behind the driving motor must be straight for a length of preferably  $1.5 \times$  belt width ( $1.5 \cdot b_0$ ) with a minimum length of 1 m (3 ft.). Place the longer straight section behind the driving motor instead of near the idling shaft to lower the belt forces in the curves. For different requirements please contact your Habasit representative.
- $l_1$**  A minimum straight section of  $2 \times$  belt width ( $2 \cdot b_0$ ) is recommended between turns in opposite directions. An absolute minimum straight length of  $1.5 \times$  belt width is required. There is no minimum straight length between curves in the same direction.
- $l_2$**  At the belt end, near the idling shaft, a minimum straight length of  $1.5 \times$  belt width ( $1.5 \cdot b_0$ ) is required.

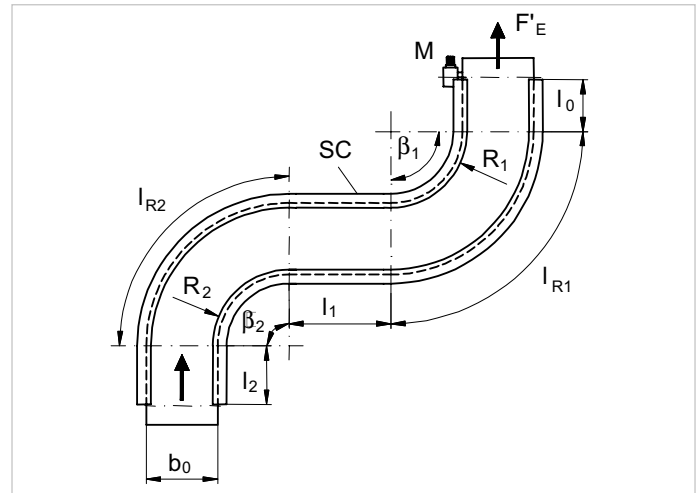


Figure 235

### Direction of movement (Fig. 240)

Most Habasit radius belts are bi-directional. Exceptions are RS511, RS515, PR612 and PR620 belts that have a recommended direction of travel. For radius belts with one curve and for spirals, Habasit recommends installing the belts with the rod heads on the outside of the curve. For belt widths of more than one curve, rods installed from both belt edges are recommended. For further installation instructions please consult the installation guidelines.

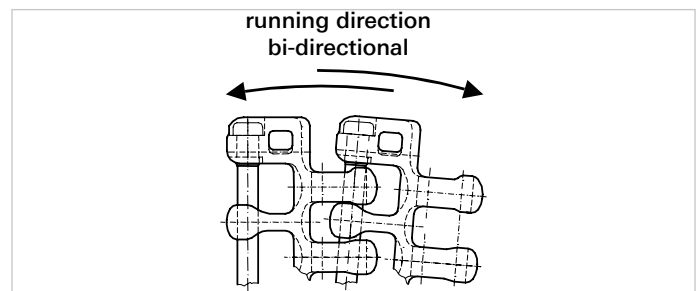


Figure 240

### Belt guides

Radius belts running around curves produce axial tension against the inner guide rail of the curve. Since conveyors usually cannot be built with very high geometrical accuracy, the belt may tend to flip at high loads or angles > 90°. The inner edge of the belt may move upwards due to axial tension against the guide rail and slip off. For this reason hold-down edge guides must be used for the inside and outside guides of a curve. If the product is larger than the belt width or if side transfer over the belt edge is required, hold-down modules or side tabs are used instead of hold-down guides. For availability see the product data sheets.

### Standard application (hold-down wear strips) (Fig. 250)

If no side transfer is required, L-shaped hold-down edge guides can be used. For safety reasons (danger of injuries at the end of the profile) it is advisable to apply this profile uninterrupted over the complete belt length. The material used for edge guides needs to be low friction in contact with the particular belt material. Generally, PE-UHMW is recommended. On the return way, hold-down tabs are needed as well. An economic solution is shown on the illustration opposite (Fig. 260). For belts wider than 600 mm, hold-down edge guides or two hold-down tabs near the edges should be used.

### Tolerance on guiding profiles

Maintain the minimum gap between the belt and the guides. While the radius belt is running in the curve section, lateral tolerance to the inner guiding profile will turn to zero. **The tolerance on the outside belt edge to the guiding profile should not be above the indicated figure of 2 to 3 mm (0.12").**

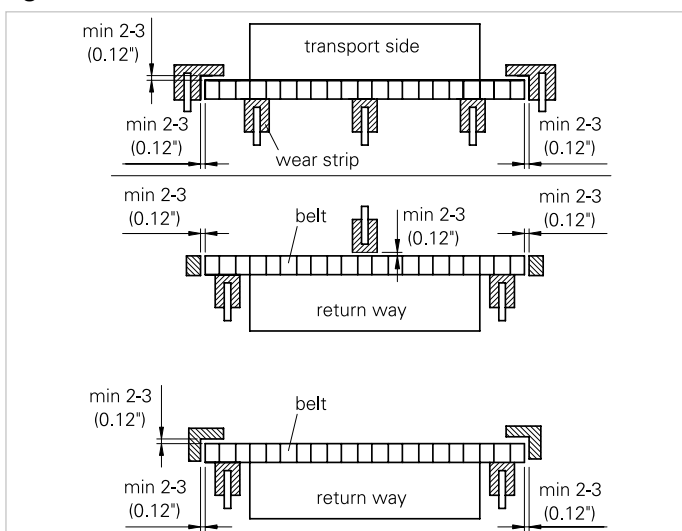


Figure 250: Hold-down guides for a belt with flights. Belts without flights follow the same design.

### Belts for protruding products (Figs. 260, 280 and 290)

Belts with hold-down tabs, side tabs or a raised deck can be used for all applications where products must be moved transversally across the belt edge (side transfer) and in cases where the product is wider than the belt itself. For applications with side guards, belts with hold-down tabs may be possible (see the product data sheet); belts with side tabs or a raised deck are not applicable.

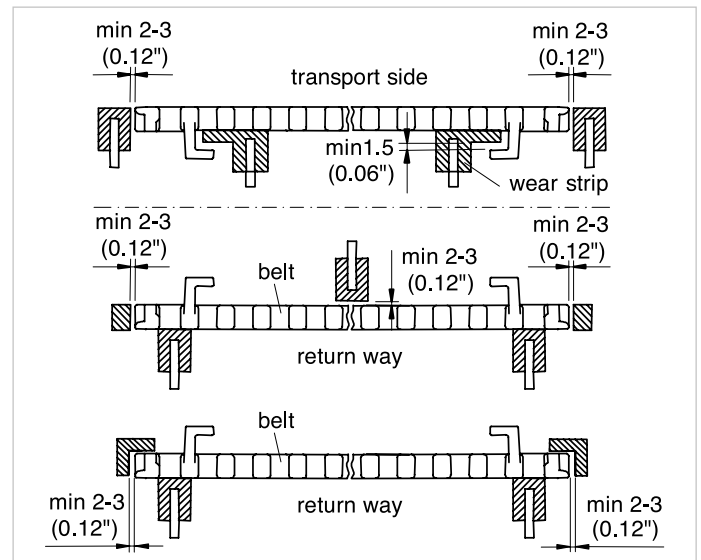


Figure 260

### Combinations

Depending on the requirements, it is possible to combine the wear strip hold-down profile on the inside radius and hold-down tab modules on the outside radius.

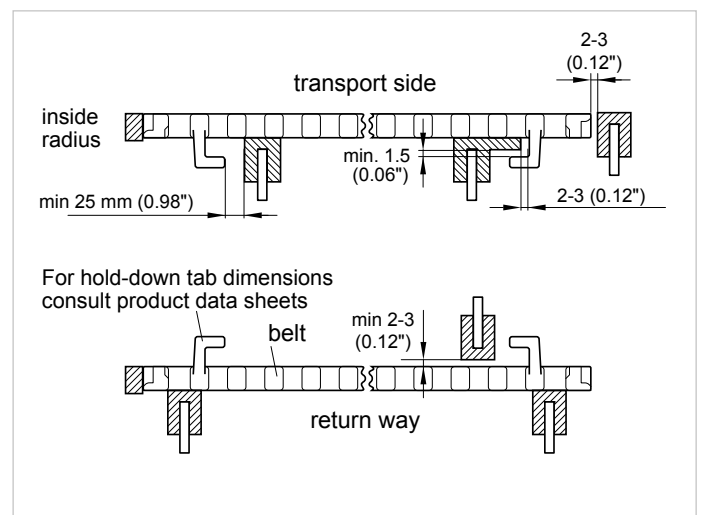


Figure 270

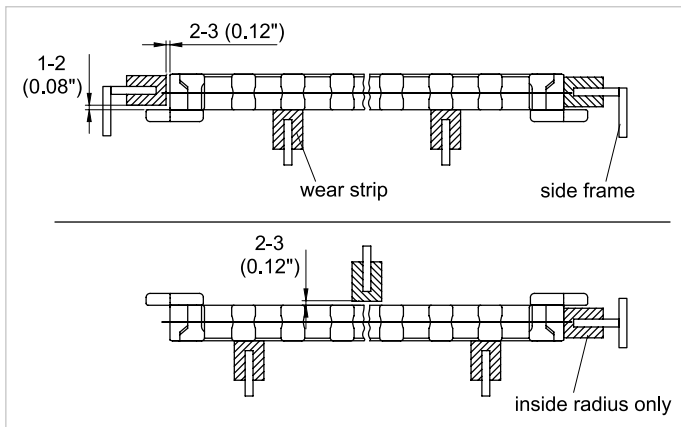


Figure 280 M3843-V00

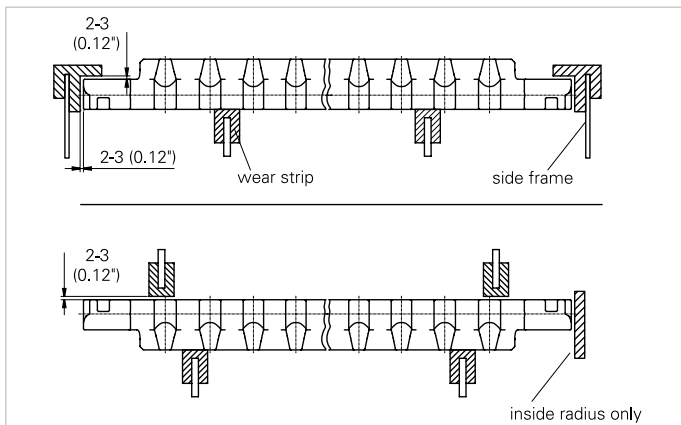


Figure 290 M3892

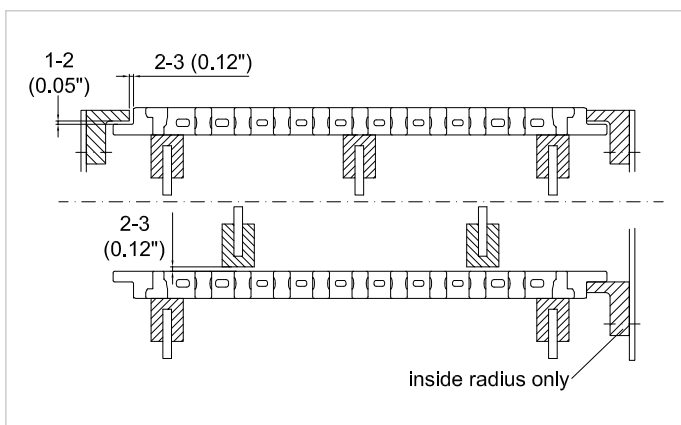


Figure 295 M2544

### High speed applications

For speeds > 40 m/min Habasit recommends using lubricated low friction materials for radius inside guides.

### Design aspects for reducing belt tension

Simple modifications to conveyor design can have a dramatic affect on reducing belt tension. Consideration should be given to the following:

- Minimize the length of the first straight section before the curve. A shorter straight section before the first curve can significantly reduce the load forces on the belt through the curve.
- Reduce the angle of the curves.
- Use an inside turn radius equal to the recommended minimum for the chosen belt series and width.
- Use the inside belt edge to guide the belt through the turn. Never use the belt hold-down tab feature.
- Use a roller return in all straight sections.
- Use a lubricated wear strip material on the inside radius (check food approval).

**NOTE: A lubricated wear strip should not be used when operating temperatures are below 5° C (50° F); or where dust, flour or grit is present.**

- Increase the conveyor operating speed to reduce belt load while maintaining the required throughput. Be cautious since higher speed causes heat generation thereby increasing friction and accelerated wear.
- Split long, multi-turn systems into two or more conveyors, each with a separate belt and drive system.
- Use multiple belt strands instead of one wide belt. This may not be an acceptable alternative if product orientation is critical.
- Lubricate the wear strip. A food grade silicone lubricant can be effective in reducing belt pull. However, note that lubricants can attract environmental contaminants that increase friction and sanitation concerns.

### Note

The primary function of the hold-down or side tabs is to act as a safety device that prevents the belt from lifting at the outside and inside of the curve when conditions cause the allowable belt pulls to be exceeded. In general, they should not be used for radial guidance or to guide the belt on its carry or return way.


Habasit radius belts are very suitable for applications with spiral conveyors. The most typical processes are proofing, drying, cooling and freezing. Spiral conveyors permit processing within a reduced space, and make use of the available height of the building. Spiral conveyors are very specialized equipment and require particular application know-how.

The following illustration and explanations offer a general overview of the design principles of spiral conveyors. For design recommendations please contact one of Habasit's spiral specialists.

Compared to steel, plastic modular belts offer the following advantages:

- Less sticking of conveyed goods
- Lower belt weight, lighter construction
- Reduced coefficient of friction between belt and cage
- Lower power consumption
- Better cleaning, no blackening
- Less ice formation
- Lower maintenance costs

### Side view of a typical spiral conveyor

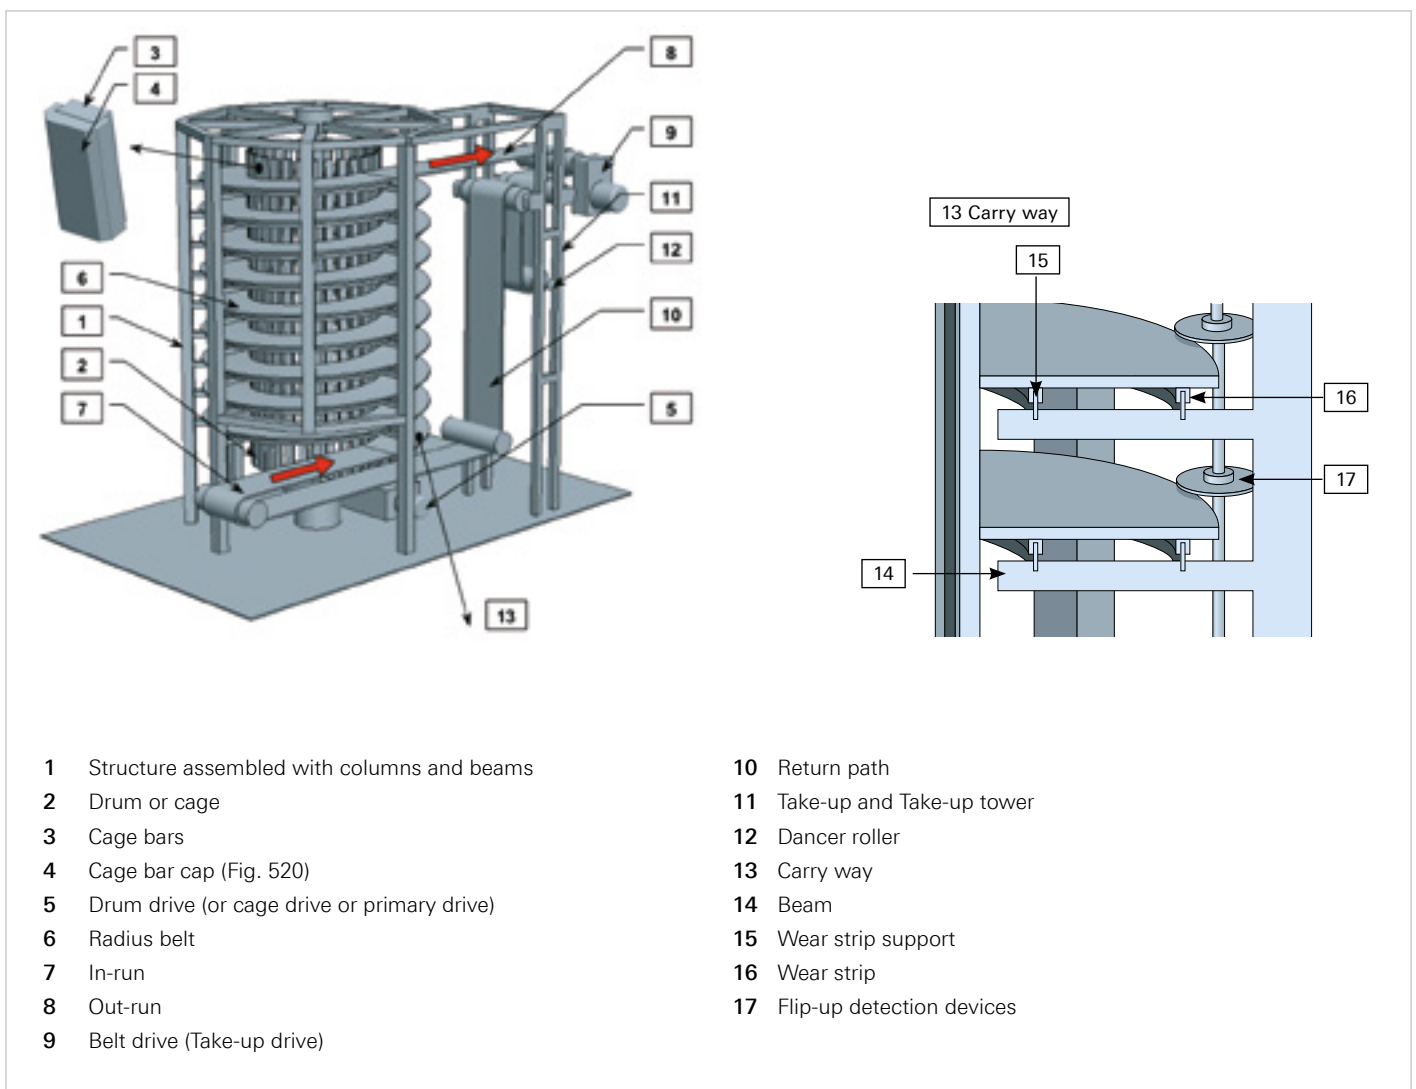

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>1 Structure assembled with columns and beams</li> <li>2 Drum or cage</li> <li>3 Cage bars</li> <li>4 Cage bar cap (Fig. 520)</li> <li>5 Drum drive (or cage drive or primary drive)</li> <li>6 Radius belt</li> <li>7 In-run</li> <li>8 Out-run</li> <li>9 Belt drive (Take-up drive)</li> </ul> | <ul style="list-style-type: none"> <li>10 Return path</li> <li>11 Take-up and Take-up tower</li> <li>12 Dancer roller</li> <li>13 Carry way</li> <li>14 Beam</li> <li>15 Wear strip support</li> <li>16 Wear strip</li> <li>17 Flip-up detection devices</li> </ul> |
|---|---|

For up-going spirals it is recommended to use belt flip-up sensors on the outer belt edge to monitor the proper belt function. Hold down rails are generally recommended at the inner belt edge for down-going spirals.

Spirals must be cleaned regularly in order to provide proper functioning.

Please contact Habasit for further information.

### Dimensional requirements for installation

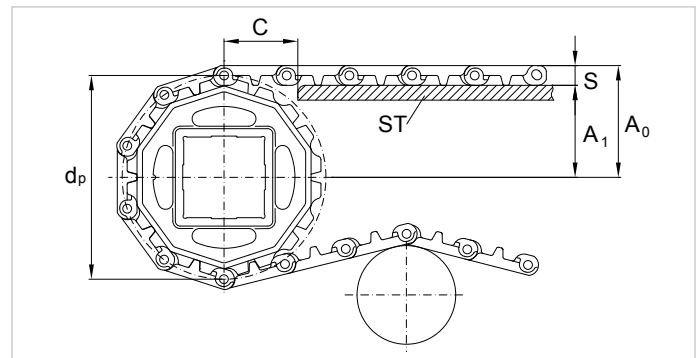


Figure 300

Belt pitch, sprocket type	Number of teeth	Polygon effect	Pitch $\varnothing$ dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)													
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		
<b>0.3"</b>							<b>M0870/73</b>													
M08S18	18	1.50%	46.5	1.83	20.3	0.80	26.3	1.04												
M08S24	24	0.90%	61.8	2.43	28.1	1.11	33.9	1.33												
M08S34	34	0.40%	87.5	3.44	41	1.61	46.8	1.84												
M08S36	36	0.40%	92.6	3.65	43.5	1.71	49.3	1.94												
<b>0.5"</b>							<b>M1065</b>													
M10S10	10	4.90%	43.1	1.70	17.6	0.69	25.6	1.01												
M10S12	12	3.40%	51.4	2.02	21.7	0.85	29.7	1.17												
M10S15	15	2.20%	64	2.52	28	1.10	36	1.42												
M10S20	20	1.20%	85.1	3.35	38.6	1.52	46.7	1.84												
M10S24	24	0.90%	102	4.02	47	1.85	55	2.17												
M10S28	28	0.60%	118.9	4.68	55.5	2.19	63.5	2.50												
M10S36	36	0.40%	152.8	6.02	72.4	2.85	80.4	3.17												
<b>0.5"</b>							<b>M1185</b>													
M11S12	12	3.40%	49.8	1.96	21.6	0.85	28.4	1.12												
M11S14	14	2.50%	58	2.28	25.7	1.01	32.5	1.28												
M11S17	17	1.70%	70.2	2.76	31.8	1.25	38.6	1.52												
M11S19	19	1.40%	78.4	3.09	35.9	1.41	42.7	1.68												
M11S24	24	0.90%	98.8	3.89	46.1	1.81	52.9	2.08												
M11S36	36	0.40%	148	5.83	70.7	2.78	77.5	3.05												
<b>0.5"</b>							<b>M1220 M1230/33</b>		<b>M1220 GT</b>		<b>M1234</b>		<b>M1280</b>							
M12S10	10	4.90%	41.2	1.62	16.1	0.63	26.1	1.03		1.13	27.6	1.09	24.8	0.98						
M12S12	12	3.40%	49.6	1.95	20.3	0.80	30.3	1.19	32.8	1.29	31.8	1.25	29	1.14						
M12S15	15	2.20%	62.4	2.46	26.7	1.05	36.7	1.44	39.2	1.54	38.2	1.5	35.4	1.39						
M12S19	19	1.40%	78.7	3.1	34.9	1.37	44.9	1.77	47.4	1.86	46.4	1.82	43.55	1.71						
M12S24	24	0.90%	99.2	3.91	45.1	1.78	55.1	2.17	57.6	2.27	56.6	2.23	53.8	2.12						
M12S28	28	0.60%	116.5	4.59	53.8	2.12	63.8	2.51	66.3	2.61	65.3	2.57	62.45	2.46						
M12S32	32	0.50%	133	5.24	62	2.44	72	2.83	74.5	2.93	73.5	2.89	70.7	2.78						
M12S36	36	0.40%	149.8	5.9	70.4	2.77	80.4	3.17	82.9	3.26	81.9	3.22	79.1	3.11						



# Design guide

## Sprocket evaluation

Belt pitch, sprocket type	Number of teeth	Polygon effect	Pitch Ø dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)													
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		
<b>0.5"</b>							<b>SM605</b>		<b>CM605</b>											
70512M	12	3.60%	48	1.9	20	0.8	28	1.1	29	1.14										
70515M	15	2.20%	61	2.4	27	1.05	34	1.35	35	1.39										
70519	19	1.40%	77	3.02	35	1.37	42	1.67	43	1.71										
70524M	24	0.90%	99	3.9	46	1.8	53	2.1	54	2.14										
70528	28	0.70%	114	4.47	53	2.09	61	2.39	62	2.43										
70536M	36	0.40%	147	5.8	70	2.75	77	3.05	78	3.09										
<b>0.5"</b>							<b>HDS605 FT</b>													
							<b>HDS605 TT</b>													
HDS70512	12	3.50%	49	1.93	20	0.79	28	1.1												
HDS70515	15	2.20%	61	2.4	26	1.02	34	1.33												
HDS70520	20	1.30%	81	3.2	36	1.42	44	1.73												
HDS70536	36	0.40%	146	5.74	68	2.69	76	3												
<b>0.75"</b>							<b>106 FT/10%/22%</b>		<b>106 RT</b>											
SB106PEU7	7	9.90%	44	1.73	18	0.7	26	1.03	27.5	1.09										
SB106PEU10	10	4.90%	62	2.43	27	1.05	35	1.38	36.5	1.44										
SB106PEU14	14	2.50%	86	3.37	39	1.52	47	1.85	48.5	1.91										
SB106PEU16	16	2.00%	98	3.84	44	1.75	53	2.08	54.5	2.14										
SB106PEU24	24	0.90%	146	5.75	69	2.71	77	3.04	78.5	3.1										
SB106PEU25	25	0.80%	152	5.98	72	2.82	80	3.15	81.5	3.21										
<b>1"</b>							<b>M2420</b>		<b>M2470 GT</b>											
							<b>M2470/72</b>													
							<b>M2480</b>													
M24S12	12	3.40%	99.5	3.92	45.1	1.78	54.1	2.13	56.6	2.23										
M24S15	15	2.20%	123.9	4.88	57.2	2.25	66.3	2.61	68.8	2.71										
M24S18	18	1.50%	148.3	5.84	69.4	2.73	78.5	3.09	81	3.19										
M24S20	20	1.20%	164.6	6.48	77.5	3.05	86.7	3.41	89.2	3.51										
<b>1"</b>							<b>M2510/11</b>		<b>M2514</b>		<b>M2520</b>		<b>M2520 RT</b>		<b>M2520/33</b>		<b>M2531</b>		<b>M2527</b>	
							<b>M2516</b>				<b>M2533</b>		<b>M2533 RT</b>		<b>GT</b>					
M25S07	7	9.90%	59.4	2.34	24.7	0.97	35.7	1.41	37.7	1.48	34.7	1.37	38.7	1.52	38.7	1.52	40.7	1.6	39.5	1.56
M25S08	8	7.60%	66.7	2.63	28.3	1.11	39.4	1.55	41.4	1.63	38.4	1.51	42.4	1.67	42.4	1.67	44.4	1.75	43.2	1.7
M25S10	10	4.90%	82.5	3.25	36.3	1.43	47.3	1.86	49.3	1.94	46.3	1.82	50.3	1.98	50.3	1.98	52.3	2.06	51.1	2.01
M25S12	12	3.40%	98.5	3.88	44.3	1.74	55.3	2.18	57.3	2.25	54.3	2.14	58.3	2.29	58.3	2.29	60.3	2.37	59.1	2.32
M25S15	15	2.20%	122.7	4.83	56.4	2.22	67.4	2.65	69.4	2.73	66.4	2.61	70.4	2.77	70.4	2.77	72.4	2.85	71.2	2.8
M25S16	16	1.90%	130.7	5.15	60.4	2.38	71.4	2.81	73.4	2.89	70.4	2.77	74.4	2.93	74.4	2.93	76.4	3.01	75.2	2.96
M25S18	18	1.50%	146.9	5.78	68.4	2.69	79.5	3.13	81.5	3.21	78.5	3.09	82.5	3.25	82.5	3.25	84.5	3.32	83.3	3.28
M25S20	20	1.20%	163	6.42	76.5	3.01	87.5	3.44	89.5	3.52	86.5	3.41	90.5	3.56	90.5	3.56	92.5	3.64	91.3	3.59
M25S21	21	1.10%	171.1	6.74	80.6	3.17	91.6	3.6	93.6	3.68	90.6	3.56	94.6	3.72	94.6	3.72	96.6	3.8	95.4	3.75

# Design guide

## Sprocket evaluation

Belt pitch, sprocket type	Number of teeth	Polygon effect	Pitch Ø dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)														
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch					
<b>1" ST</b>							<b>M2533 ST</b>														
M25S10	10	4.90%	83.6	3.29	36.9	1.46	46.9	1.85													
M25S12	12	3.40%	99.8	3.93	45.1	1.78	55.1	2.17													
M25S18	18	1.50%	148.8	5.86	69.6	2.74	79.6	3.13													
M25S20	20	1.20%	165.1	6.50	77.8	3.06	87.8	3.46													
<b>1" Radius</b>							<b>M2540</b>		<b>M2540 RT</b>		<b>M2540 GT</b>		<b>M2543</b>								
M25S07	7	9.90%	59.4	2.34	24.7	0.97	35.7	1.41	37.5	1.48	40.5	1.59	37.4	1.47							
M25S08	8	7.60%	66.7	2.63	28.3	1.11	39.4	1.55	41.3	1.62	44.2	1.74	41.1	1.62							
M25S10	10	4.90%	82.5	3.25	36.3	1.43	47.3	1.86	49.1	1.93	52.1	2.05	49	1.93							
M25S12	12	3.40%	98.6	3.88	44.3	1.74	55.3	2.18	57.1	2.25	60.1	2.37	57	2.24							
M25S15	15	2.20%	122.7	4.83	56.3	2.22	67.4	2.65	69.2	2.72	72.2	2.84	69.1	2.72							
M25S16	16	1.90%	130.8	5.15	60.4	2.38	71.4	2.81	73.2	2.88	76.2	3	73.1	2.88							
M25S18	18	1.50%	146.9	5.78	68.4	2.69	79.5	3.13	81.3	3.2	84.3	3.32	81.2	3.19							
M25S20	20	1.20%	163	6.42	76.5	3.01	87.5	3.44	89.3	3.52	92.3	3.63	89.2	3.51							
M25S21	21	1.10%	171.1	6.74	80.6	3.17	91.6	3.6	93.4	3.68	96.4	3.79	93.3	3.67							
<b>1"</b>							<b>M2585-PO</b>		<b>M2586</b>												
							<b>M2585-SO</b>														
M25S07-C2	7	9.90%	59.6	2.35	24.3	0.96	35.3	1.39	41.3	1.63											
M25S08-C2	8	7.60%	67.7	2.67	28.4	1.12	39.4	1.55	45.4	1.79											
M25S10-C2	10	4.90%	83.8	3.3	36.4	1.43	47.4	1.87	53.4	2.1											
M25S12-C2	12	3.40%	100	3.94	44.5	1.75	55.5	2.19	61.5	2.42											
M25S15-C2	15	2.20%	124.5	4.9	56.8	2.24	67.8	2.67	73.8	2.9											
M25S16-C2	16	1.90%	132.8	5.23	60.9	2.40	71.9	2.83	77.9	3.07											
M25S18-C2	18	1.50%	149.1	5.87	69.1	2.72	80.1	3.15	86.1	3.39											
M25S20-C2	20	1.20%	165.5	6.52	77.3	3.04	88.3	3.47	94.3	3.71											
M25S21-C2	21	1.10%	173.7	6.84	81.4	3.20	92.4	3.64	98.4	3.87											
<b>1"</b>							<b>M2620/70</b>		<b>M2620 GT</b>		<b>M2670 GT</b>		<b>M2620 RT</b>		<b>M2623</b>						
M26S12	12	3.40%	99.1	3.9	43.2	1.70	55.9	2.2	58.4	2.3	59.9	2.36	70.4	2.77	57.1	2.25					
M26S13	13	2.90%	107.2	4.22	47.3	1.86	60	2.36	62.5	2.46	64	2.52	74.5	2.93	61.2	2.41					
M26S14	14	2.50%	115.3	4.54	51.3	2.02	64	2.52	66.5	2.62	68	2.68	78.5	3.09	65.2	2.57					
M26S15	15	2.20%	123.4	4.86	55.4	2.18	68.1	2.68	70.6	2.78	72.1	2.84	82.6	3.25	69.3	2.73					
M26S16	16	1.90%	131.5	5.18	59.4	2.34	72.1	2.84	74.6	2.94	76.1	3	86.6	3.41	73.3	2.89					
M26S17	17	1.70%	139.6	5.5	63.5	2.50	76.2	3	78.7	3.1	80.2	3.16	90.7	3.57	77.4	3.05					
M26S18	18	1.50%	147.7	5.81	67.5	2.66	80.2	3.16	82.7	3.26	84.2	3.31	94.7	3.73	81.4	3.2					
M26S19	19	1.40%	155.8	6.13	71.6	2.82	84.3	3.32	86.8	3.42	88.3	3.47	98.8	3.89	85.5	3.36					
M26S20	20	1.20%	164	6.46	75.7	2.98	88.4	3.48	90.9	3.58	92.4	3.64	102.9	4.05	89.6	3.53					
M26S21	21	1.10%	172.1	6.78	79.7	3.14	92.4	3.64	94.9	3.74	96.4	3.8	106.9	4.21	93.6	3.69					
M26S22	22	1.00%	180.2	7.09	83.8	3.30	96.5	3.8	99	3.9	100.5	3.95	111	4.37	97.7	3.84					
M26S23	23	0.90%	188.4	7.42	87.9	3.46	100.6	3.96	103.1	4.06	104.6	4.12	115.1	4.53	101.8	4.01					

# Design guide

## Sprocket evaluation

Belt pitch, sprocket type	Number of teeth	Polygon effect	Pitch Ø dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)																	
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch								
<b>1" Radius</b>							<b>M2791</b>																	
M27S12	12	3.40%	98.7	3.89	43.1	1.69	55.8	2.34																
M27S18	18	1.60%	147.1	5.79	67.2	2.65	79.9	2.66																
<b>1"</b>							<b>ST610 VT610</b>																	
71007M	7	9.80%	59	2.31	24	0.95	35	1.36																
71009M	9	6.10%	74	2.92	32	1.25	42	1.66																
71012M	12	3.50%	98	3.87	44	1.73	54	2.14																
71015M	15	2.20%	122	4.81	56	2.2	66	2.61																
SP71018	18	1.60%	147	5.8	68	2.69	79	3.1																
SP71019	19	1.30%	162	6.38	72	2.83	82	3.24																
SP71030	30	0.60%	242	9.54	116	4.56	126	4.97																
<b>1"</b>							<b>HDS610 FT</b>		<b>HDS610 CVT</b>															
HDS71007	7	9.80%	59	2.3	24	0.95	35	1.36	36	1.43														
HDS71009	9	6.10%	74	2.92	32	1.26	42	1.67	44	1.74														
HDS71012	12	3.50%	98	3.86	44	1.73	54	2.14	56	2.21														
HDS71015	15	2.20%	122	4.81	56	2.2	66	2.61	68	2.68														
HDS71018	18	1.60%	146	5.76	68	2.67	78	3.08	80	3.15														
<b>1"</b>							<b>208 FT 208 35%</b>		<b>208 RR</b>															
SB208PEU6	6	13.30%	51	2	21	0.83	30	1.18	35.3	1.39														
SB208PEU9	9	6.10%	74	2.92	33	1.29	42	1.64	47.3	1.85														
SB208PEU10	10	5.00%	82	3.24	37	1.45	46	1.8	51.3	2.01														
SB208PEU12	12	3.50%	98	3.86	45	1.76	56	2.2	61.3	2.41														
SB208PEU18	18	1.60%	146	5.76	69	2.71	78	3.06	83.3	3.27														
SB208PEU19	19	1.40%	154	6.08	73	2.87	82	3.22	87.3	3.43														
SB208PEU20	20	1.30%	162	6.39	77	3.03	86	3.38	91.3	3.59														
<b>1"</b>							<b>MB610</b>																	
MB71012	12	3.50%	98	3.86	43	1.68	55	2.18																
MB71016	16	2.00%	130	5.12	59	2.31	71	2.81																
MB71018	18	1.60%	146	5.76	67	2.63	80	3.13																
MB71021	21	1.20%	170	6.71	79	3.1	91	3.6																
MB71031	31	0.60%	251	9.89	119	4.69	132	5.19																
<b>1" Radius</b>							<b>IS610</b>		<b>CT610</b>		<b>IS610 GT</b>													
71007M	7	9.80%	59	2.31	25	0.87	34	1.34	36	1.43	37.3	1.48												
71009M	9	6.10%	74	2.92	32	1.27	42	1.65	44	1.74	45.3	1.79												
71012M	12	3.50%	98	3.87	44	1.75	54	2.12	56	2.21	57.3	2.26												
71015M	15	2.20%	122	4.81	56	2.22	66	2.59	68	2.68	69.3	2.73												
SP71018	18	1.60%	147	5.8	69	2.71	78	3.09	81	3.18	81.3	3.23												
SP71019	19	1.40%	154	6.08	72	2.85	82	3.23	84	3.32	85.3	3.37												
SP71030	30	0.60%	242	9.54	116	4.58	126	4.96	128	5.05	129.3	5.1												

# Design guide

## Sprocket evaluation

Belt pitch, sprocket type	Number of teeth	Polygon effect	Pitch Ø dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)													
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				
<b>1.1"</b>							<b>F51 / F52 smart fit</b>		<b>F53 smart fit</b>											
571107	7	10.40%	63	2.5	26	1.03	37	1.47	47	1.7										
571108	8	7.90%	72	2.82	30	1.19	41	1.63	51	1.86										
571109	9	6.30%	80	3.16	35	1.36	46	1.8	52	2.03										
571111M	11	4.30%	97	3.83	43	1.7	54	2.13	61	2.37										
571113	13	3.00%	115	4.51	52	2.04	63	2.47	68	2.71										
571115	15	2.30%	132	5.2	60	2.38	72	2.82	77	3.05										
571117	17	1.80%	149	5.88	69	2.72	80	3.16	86	3.39										
571118	18	1.60%	158	6.22	73	2.89	85	3.33	90	3.56										
571119	19	1.50%	164	6.47	77	3.02	88	3.45	94	3.69										
571121	21	1.20%	184	7.25	87	3.41	98	3.84	104	4.08										
571123	23	1.00%	201	7.93	95	3.75	106	4.18	112	4.42										
571127	27	0.80%	236	9.3	113	4.43	124	4.87	130	5.1										
571129	29	0.70%	254	10	121	4.78	133	5.22	139	5.45										
<b>1.1"</b>							<b>F54</b>													
57110754	7	10.40%	63	2.5	26	1.03	37	1.47												
57110854	8	7.90%	72	2.82	30	1.19	41	1.63												
57110954	9	6.30%	80	3.16	35	1.36	46	1.8												
57111154	11	4.30%	97	3.83	43	1.7	54	2.13												
57111354	13	3.00%	115	4.51	52	2.04	63	2.47												
57111554	15	2.30%	132	5.2	60	2.38	72	2.82												
57111754	17	1.80%	149	5.88	69	2.72	80	3.16												
57111854	18	1.60%	158	6.22	73	2.89	85	3.33												
57111954	19	1.50%	164	6.47	77	3.02	88	3.45												
57112154	21	1.20%	184	7.25	87	3.41	98	3.84												
57112354	23	1.00%	201	7.93	95	3.75	106	4.18												
57112754	27	0.80%	236	9.3	113	4.43	124	4.87												
57112954	29	0.70%	254	10	121	4.78	133	5.22												
<b>1.2" Radius</b>							<b>PR612 1.6</b>		<b>PR612 2.2</b>											
PR71207	7	10.00%	70	2.8	29	1.15	42	1.65												
PR71210	10	4.90%	99	3.9	43	1.7	56	2.2												
PR71213	13	3.00%	127	5	57	2.25	70	2.75												
PR71217	17	1.80%	166	6.5	76	3	89	3.5												
<b>1.5" Radius</b>							<b>M3840/43</b>		<b>M3840 RT</b>		<b>M3843 GT</b>		<b>M3892</b>							
M38S08	8	7.60%	100.5	3.96	42	1.65	59.8	2.35	62.3	2.45	64.8	2.55	71.8	2.82						
M38S12	12	3.40%	149	5.87	66	2.60	84	3.31	86.5	3.41	89	3.5	96	3.78						
M38S16	16	1.90%	196	7.72	90.1	3.55	107.5	4.23	110	4.33	112.5	4.43	119.5	4.7						
<b>1.5"</b>							<b>SP615</b>													
SP71507	7	9.90%	88	3.46	37	1.44	52	2.03												
71509M	9	6.00%	112	4.39	48	1.9	63	2.49												
71512M	12	3.50%	147	5.8	66	2.61	81	3.2												
SP71515	15	2.20%	183	7.22	84	3.32	99	3.91												
SP71517	17	1.80%	207	8.16	96	3.79	111	4.38												

# Design guide

## Sprocket evaluation

Belt pitch, sprocket type	Number of teeth	Polygon effect	Pitch Ø dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)												
			mm	inch	mm	inch	mm		inch		mm		inch		mm		inch		
							mm	inch	mm	inch	mm	inch	mm	inch					
<b>1.5"</b>								<b>ST615</b>											
<b>VT615</b>																			
ST71509M	9	6.10%	111.5	4.39	46	1.81	58.7	2.31											
ST71512M	12	3.50%	147.3	5.8	64.8	2.55	77.5	3.05											
ST71515	15	2.20%	183.4	7.22	83.3	3.28	96	3.78											
ST71517	17	1.80%	207.3	8.16	95.5	3.76	108.2	4.26											
<b>1.5" Radius</b>								<b>IS615</b>											
SP71507	7	9.90%	88	3.46	37	1.44	52	2.03											
71509M	9	6.00%	112	4.39	48	1.9	63	2.49											
71512M	12	3.50%	147	5.8	66	2.61	81	3.2											
SP71515	15	2.20%	183	7.22	84	3.32	99	3.91											
SP71517	17	1.80%	207	8.16	96	3.79	111	4.38											
<b>1.75"</b>								<b>CC41</b>											
<b>CC42</b>																			
471707	7	10.10%	102	4.39	42	1.64	61	2.39											
471709	9	6.10%	130	5.8	56	2.19	75	2.94											
471711	11	4.10%	158	7.22	69	2.73	88	3.48											
471713	13	3.00%	186	8.16	83	3.28	102	4.03											
471714	14	2.60%	200	5.8	90	3.56	109	4.31											
471717	17	1.80%	242	7.22	112	4.39	131	5.14											
471721	21	1.20%	298	8.16	140	5.5	159	6.25											
<b>2"</b>								<b>M5010/10/15</b>		<b>M5023</b>		<b>M5013/14</b>		<b>M5010 RT</b>		<b>M5032 RT</b>		<b>M5064</b>	
								<b>M5020/21</b>		<b>M5015 GT</b>		<b>M5032/33</b>		<b>0 – 90°</b>					
								<b>M5032/33</b>		<b>M5067</b>		<b>RT</b>							
								<b>M5060/62/65</b>											
M50S06	6	13.40%	102.1	4.02	43	1.69	59.1	2.32	60.3	2.37	62.1	2.44	62.6	2.46	75.1	2.95	61.6	2.42	
M50S08	8	7.60%	133.4	5.25	58.7	2.31	74.7	2.94	75.9	2.99	77.7	3.06	78.2	3.08	90.7	3.57	77.2	3.04	
M50S10	10	4.90%	165.2	6.5	74.6	2.94	90.6	3.57	91.8	3.61	93.6	3.69	94.1	3.7	106.6	4.2	93.1	3.67	
M50S12	12	3.40%	197.2	7.76	90.6	3.57	106.6	4.2	107.8	4.24	109.6	4.31	110.1	4.33	122.6	4.83	109.1	4.3	
M50S16	16	1.90%	261.5	10.3	122.7	4.83	138.7	5.46	140	5.51	141.8	5.58	142.3	5.6	154.8	6.09	141.3	5.56	
<b>2"</b>								<b>M5131</b>											
								<b>M5182 RT</b>											
M51S10	10	4.90%	165.2	6.5	74.6	2.94	98.6	3.88											
M51S12	12	3.40%	197.2	7.76	90.6	3.57	114.6	4.51											
M51S13	13	2.90%	213.2	8.39	98.8	3.89	122.6	4.83											
M51S16	16	1.90%	261.5	10.3	122.7	4.83	146.8	5.78											
<b>2"</b>								<b>SP620</b>											
								<b>SE620</b>											
SP72006	6	13.30%	102	4	34	1.34	54	2.13											
72008M	8	7.60%	133	5.23	51	2.01	72	2.82											
72010M	10	5.00%	164	6.47	67	2.64	87	3.44											
SP72011	11	4.10%	180	7.1	76	3	97	3.81											
72012M	12	3.50%	196	7.73	85	3.35	105	4.13											
SP72015	15	2.20%	244	9.62	109	4.29	130	5.1											
SP72018	18	1.60%	293	11.52	134	5.28	154	6.07											

# Design guide

## Sprocket evaluation

Belt pitch, sprocket type	Number of teeth		Pitch Ø dp		A1 +1 mm/-0 mm (effective)		A0 +1 mm/-0 mm (effective)													
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		
<b>2"</b>							<b>HDS620 FT HDS620 VT</b>		<b>HDS620 CT</b>		<b>HDS620 EZR</b>									
HDS72006	6	13.30%	102	4	34	1.33	56	2.19	59	2.32	58	2.28								
HDS72008M	8	7.60%	133	5.23	51	2.01	71	2.81	75	2.94	74	2.9								
HDS72010M	10	5.10%	162	6.47	68	2.68	87	3.43	90	3.56	89	3.52								
HDS72012M	12	3.50%	196	7.73	86	3.33	103	4.06	106	4.19	105	4.15								
HDS72016	16	2.00%	260	10.25	118	4.63	139	5.49	143	5.62	142	5.58								
<b>2"</b>							<b>HDU620 FT HDU620 VT</b>		<b>HDU620 CT</b>		<b>HDU620 EZR</b>									
HDU72006	6	13.30%	102	4	41	1.6	61	2.4	64	2.53	64	2.5								
HDU72008M	8	7.60%	133	5.23	56	2.21	76	3.01	80	3.14	79	3.11								
HDU72010M	10	5.00%	164	6.47	72	2.84	92	3.64	96	3.77	95	3.77								
HDU72012	12	3.50%	196	7.72	88	3.46	108	4.26	112	4.39	111	4.39								
HDU72014	14	2.60%	228	8.99	104	4.09	124	4.89	128	5.02	127	4.99								
HDU72016	16	2.00%	260	10.25	120	4.73	140	5.53	144	5.56	143	5.63								
<b>2"</b>							<b>FF620</b>		<b>FF620 WR</b>		<b>FF620 MC</b>									
72006	6	13.30%	102	4	37	1.46	54	2.14	60	2.36	60	2.36								
72008M	8	7.60%	133	5.23	53	2.08	70	2.76	76	2.98	76	2.98								
72010M	10	5.00%	164	6.47	68	2.7	86	3.38	91	3.6	91	3.6								
72012M	12	3.50%	196	7.73	84	3.33	102	4.01	107	4.23	107	4.23								
72016	16	2.00%	260	10.25	116	4.59	134	5.27	139	5.49	139	5.49								
<b>2" Radius</b>							<b>IS620</b>													
PR72010	10	4.90%	165	6.5	74	2.9	89	3.5												
<b>2" Radius</b>							<b>PR620 SPS</b>													
PR72010 SPS	10	4.90%	165	6.5	74	2.9	89	3.5												
<b>2.2"</b>							<b>M5482 RT</b>													
M54S09	9	6.20%	164	6.5	74	2.91	97.9	3.85												
M54S11	11	3.90%	199.1	7.8	92	3.62	115.9	4.56												
M54S15	15	2.20%	269.8	10.6	127	5	150.9	5.94												
<b>2" Radius</b>							<b>M5290/93</b>													
M52S08	8	7.60%	133.4	5.25	58.7	2.31	74.7	2.94												
M52S09	9	6.20%	149.2	5.87	66.6	2.62	82.6	3.25												
M52S10	10	4.90%	165.1	6.5	74.2	2.92	90.6	3.56												
M52S12	12	3.40%	197.2	7.76	90.4	3.56	106.6	4.2												
<b>2.5"</b>							<b>M6360</b>													
M63S06	6	13.40%	127	5	54	2.13	73	2.87												
M63S08	8	7.60%	165.9	6.53	73.5	2.89	92.5	3.64												
M63S10	10	4.90%	205.5	8.09	93.5	3.68	112.3	4.42												
M63S13	13	2.90%	265.3	10.44	123.5	4.86	142.2	5.6												
<b>2.5"</b>							<b>M6420</b>		<b>M6423/24</b>		<b>M6425</b>									
M64S10	10	4.90%	206.4	8.13	90.2	3.55	116.2	4.57	117.4	4.62	123.7	4.87								
M64S12	12	3.40%	246.4	9.7	110.2	4.34	136.2	5.36	137.4	5.41	143.7	5.66								
M64S13	13	2.90%	266.4	10.49	120.2	4.73	146.2	5.76	147.4	5.8	153.7	6.05								
M64S15	15	2.20%	306.7	12.07	140.4	5.53	166.4	6.55	167.6	6.6	173.9	6.84								
M64S20	20	1.20%	407.6	16.05	190.8	7.51	216.8	8.54	218	8.58	224.3	8.83								

For other sprocket sizes and appropriate dimensions, please contact your Habasit representative.

### Design recommendations

The correct adjustment of the belt support or shaft placement (dimension A1) is important. Excessive noise, increased sprocket wear and engagement problems may result if the recommendations are not followed.

### Standard solution (Fig. 310)

Straight support guides are low cost and simple to produce. The supports should have a slight downward radius or chamfer leading edge. Distance C between the belt support and wear strip allows the respective link row to adapt its position to the up and down moving sprocket circumference (polygon effect). Take care that the guides do not touch the sprockets. For the dimension of C see the sprocket data sheets.

### Optional (Fig. 320)

For smoother belt run and best load support and transmission at the belt end, Habasit recommends bending the wear strip leading edge. Take care that the guides do not touch the sprockets.

### Minimum standard sprocket size

This table is for belts equipped with hold-down tabs or hold-down devices

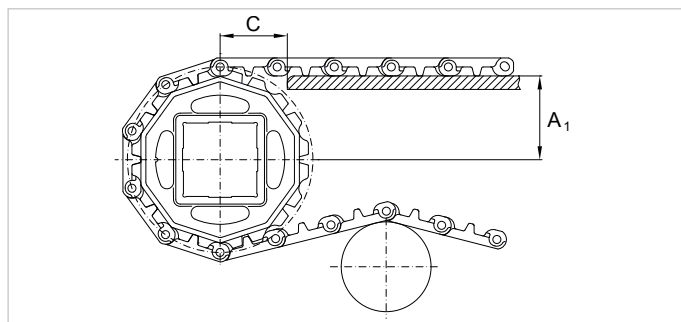


Figure 310

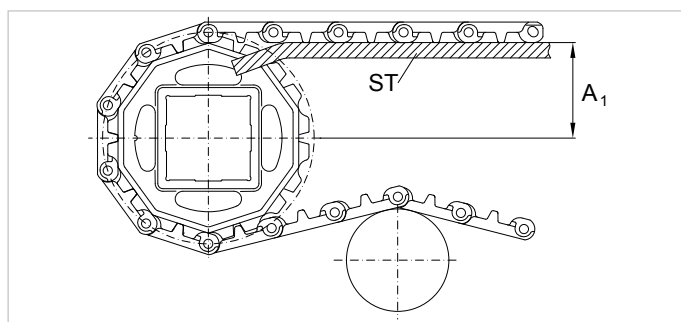


Figure 320

	Min. number of teeth	Max. square bore		Max. round bore	
		mm	inch	mm	inch
<b>Series with hold-down tabs (H, T, ActivXchange)</b>					
M1200	15	25	1	25	1 <sup>3</sup> / <sub>16</sub>
106	14	–	1	40	1 <sup>1</sup> / <sub>2</sub>
106	16	40	1.5	50	2
M2400*	12	40	1.5	30	1
M2500	10	–	1	30	1 <sup>3</sup> / <sub>16</sub>
M2500	12	40	1.5	40	1 <sup>3</sup> / <sub>16</sub>
M2600*	12	40	1.5	40	1 <sup>1</sup> / <sub>2</sub>
IS/CT610	9	–	–	–	1
IS/CT610	12	–	1	40	1 <sup>1</sup> / <sub>2</sub>
IS/CT610	15	40	1.5	40	1 <sup>15</sup> / <sub>16</sub>
PR612	10	–	1	40	1 <sup>1</sup> / <sub>2</sub>
PR612	13	40	1.5	50	2
M3840 side tabs only	10	40	1.5	–	–
M3800	12	60	2.5	–	–
IS615	7	–	1	40	1 <sup>1</sup> / <sub>2</sub>
IS615	9	40	1.5	40	1 <sup>15</sup> / <sub>16</sub>
IS620	6	–	1	–	1
IS620	8	40	1.5	40	1 <sup>15</sup> / <sub>16</sub>
<b>Series with hold-down devices (V-modules)</b>					
M2500	12	40	1.5	40	1 <sup>3</sup> / <sub>16</sub>
M5000	8	40	1.5	–	–
M5000	10	60	2.5	–	–

\* For multihub sprockets min. number of teeth 18

### Sprocket installation, general

(also see the product data sheets)

In order to allow the belt to expand/contract, only the center sprocket on each shaft is fixed. For shafts with two sprockets, the sprocket on the drive side is fixed.

Various locking methods are possible:

- Set screws and set collars (Fig. 330) – mainly used with round shafts on keyways.
- Retainer rings for square and round shafts (Figs. 340 and 350).
- Retaining plate (Figs. 360 and 370) – a simple low-cost method for square shafts.

Always maintain a gap of 0.3 mm (0.01") between the sprocket hub and retaining device. All devices must be securely fastened.

**Note: Molded sprockets should not be mixed with machined sprockets on the same shaft.**

### Tracking of M5010, M5011, M5013, M5014, M5060, M5064

The molded standard sprockets track the belt leaving some transversal clearance to the belt (approx.  $\pm 2.5$  mm (0.10")). This is advantageous in food applications with very critical cleaning requirements, e.g. in the meat industry. For other applications it may be desirable to reduce this clearance in order to provide accurate tracking performance. The most common way to do this is to use a pair of center sprockets instead of one only. These two sprockets are both located on the shaft at a fixed distance using one center fixing plate (Fig. 370).

The width of this plate is:

$d = 20$  mm (0.79") for M5010, M5011, M5013, M5014

$d = 14$  mm (0.55") for M5060, M5064

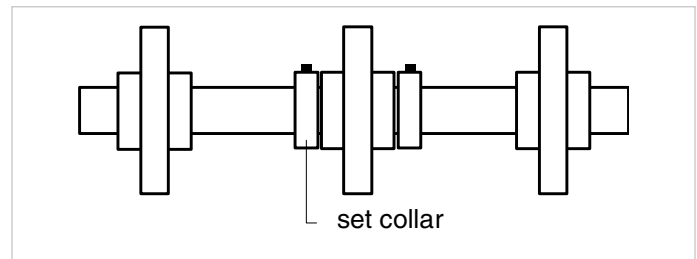


Figure 330: Type: set screws and set collars

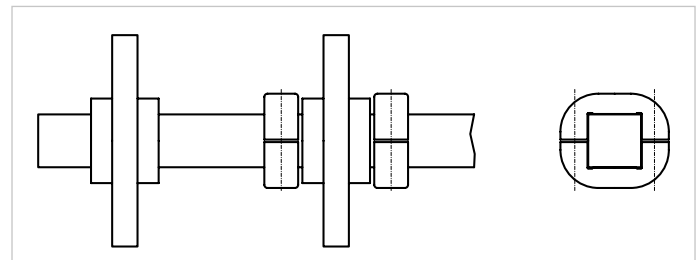


Figure 340: Type: retainer rings

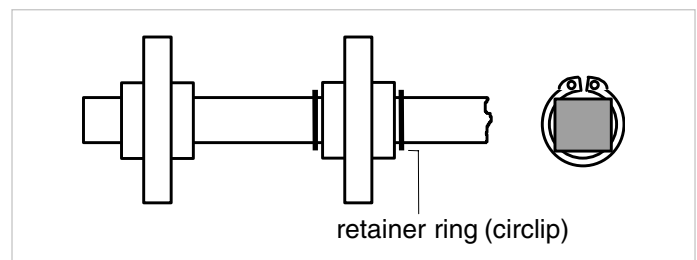


Figure 350: Type: retainer rings

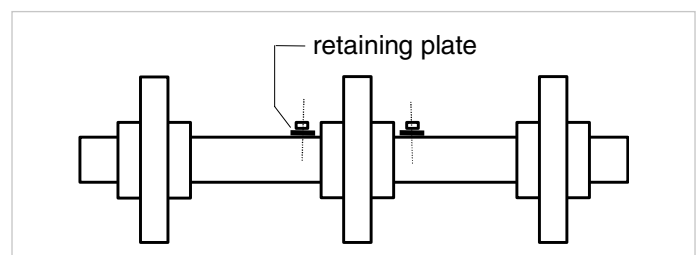


Figure 360: Type: retaining plate

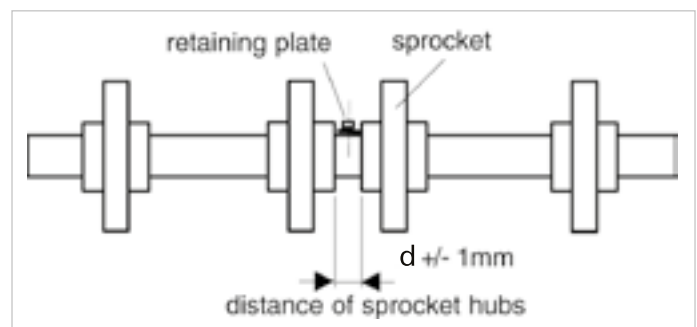


Figure 370



### Positioning and spacing of sprockets (Fig. 380)

Proper installation of sprockets ensures maximum belt to sprocket engagement. The number of sprockets ( $n$ ), spacing and positioning must be evaluated from the respective table of the sprocket data sheet or calculated using the LINK-SeleCalc program. It can also be found in tables in the Appendix chapter on sprocket spacing in this engineering guide.

The center tracking sprocket must be installed either in the middle of the belt or offset.

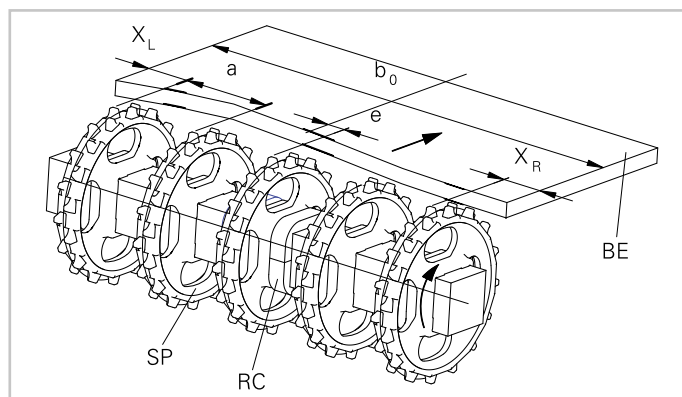


Figure 380

### Support edge rollers (SR) (Fig. 390)

For belt Series M0800, M1065, M1100, M2585, F50, PR612, PR620 and RS511/RS515 additional support rollers must be installed on all shafts to support the belt at the edges.

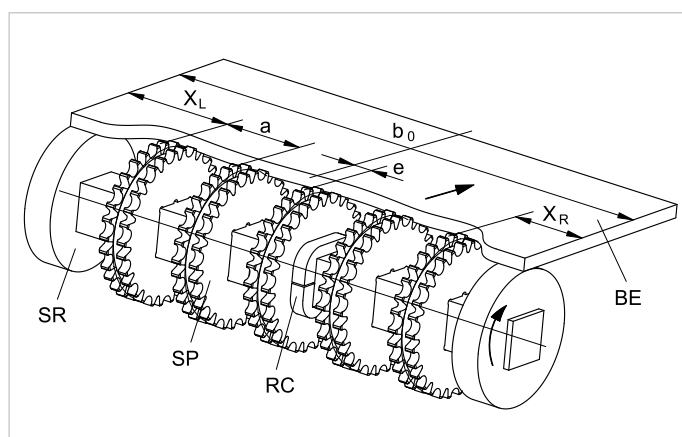


Figure 390

### Topside drive for spirals

In exceptional cases some applications, for example spirals, may need to drive the belt by engaging the sprockets from the top side of the belt instead of the bottom side. In this case specially adapted sprockets are required.

For specific information please contact Habasit.

# Design guide

## Sprocket evaluation

Habasit provides both round and square bore sprockets to mount on a similarly shaped and sized shaft. Although square shafts are not a requirement for Habasit products, they eliminate the need for shaft keys and resist shaft deflection better than round shafts of the same size and can transmit higher torque. Round shafts are acceptable for moderate to lightly loaded belts with widths of 914 mm (36") or narrower. Square shafts are recommended for wide or heavily loaded belts and in applications involving extreme temperature variations.

### Round shafts (ambient temperature)

Special attention is required when mounting sprockets on round shafts. To properly mount sprockets on a round shaft, cut individual key seats for each sprocket location or one continuous key seat across the length of the shaft. The key length for the center-most or tracking sprocket is equal to the sprocket's hub width. Set collars or retaining rings are placed against the sprocket hub and tightened by using set screws. The outboard sprocket keys are cut to a length equal to the sprocket hub width **plus 12.7 mm (0.50")**. Set collars or retaining rings are placed against the key, locking it in place while allowing the sprocket to freely float laterally on the shaft.

### Sprocket alignment on the shafts (Figs. 400 and 410)

During installation of the sprockets on the shafts it is important to make sure that the teeth of all sprockets are correctly aligned. For this purpose the sprockets normally feature a timing mark. If the number of sprocket teeth is a multiple of four, every radial orientation of the sprocket on the shaft is possible. Therefore some sprockets do not feature timing marks.

### Keyways for round shafts (Fig. 420)

The keyways on sprockets fit the following shaft keyways:

Metric													
ø D	mm	20	25	30	35	40	50	60	70	80	90		
a	mm	2.8	3.3	3.3	3.3	3.3	3.8	4.4	4.9	5.4	5.4		
b	mm	6	8	8	10	12	14	18	20	22	25		

According to DIN 6885 tolerance for a: 0/-0.2

Imperial													
ø D	inch	¾	1	1 ⅜	1 ¼	1 ⅞	1 ½	2	2 ½	2 ¾	3 ¼	3 ½	4 ½
a	inch	0.098	0.130	0.130	0.130	0.193	0.193	0.256	0.319	0.319	0.370	0.429	0.488
b	inch	⅜	¼	¼	¼	⅜	⅜	½	⅝	⅝	¾	⅞	1

According to ANSI B17.1 tolerance for a: 0/-0.001

### Shaft tolerances

The dimensional tolerance of round and square shaft shapes is according to ISO 286-2 h12.

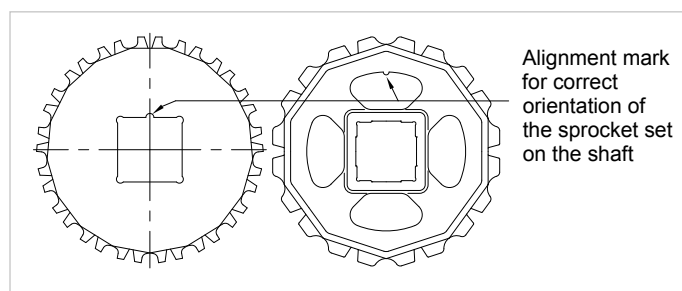


Figure 400

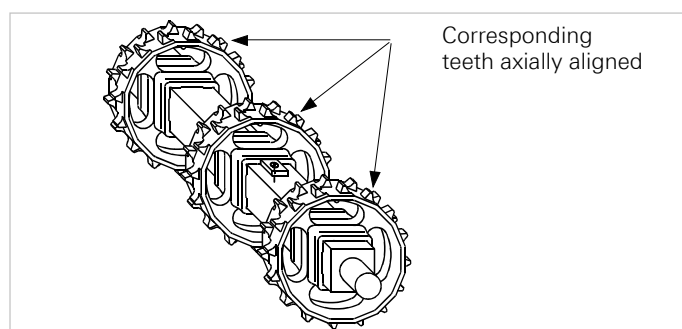


Figure 410

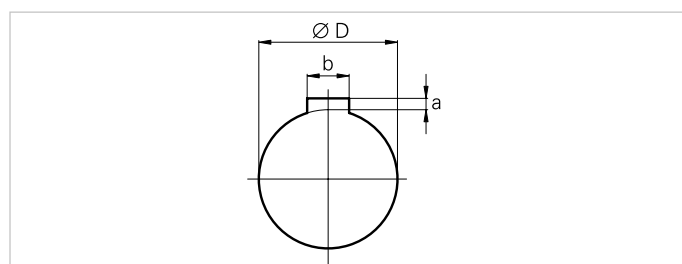


Figure 420

Most applications require belts to be continuously supported on the load carrying section of a conveyor. The support system must be stiff enough to resist the specific conveying load. Consideration must be given to the carry way support configuration and material for optimizing conveyor performance. Various designs are possible.

The following are commonly used:

- A Straight or parallel wear strip arrangement (Fig. 440)** These are the most economical methods. For lower belt wear, the parallel wear strip segments may be arranged alternating offset instead of in-line or as a serpentine strip. For the number of wear strips refer to the product data sheets.
- B V-shaped arrangement of wear strips (Fig. 450)** (chevron or herringbone type). This provides an equal distribution of load and wear over the total belt width. The maximum distances between the wear strips have to be 100 mm (4") for 2" belts and 50 mm (2") for 1"/0.5" belts. Max. angle  $\beta = 45^\circ$ .
- C Smooth continuous support/impact plate (Fig. 455)** This type of carry way is a plate or bed supporting the entire conveyor belt length and width practical. The bed can be perforated to provide drainage or to allow debris to fall through, and is typically used in very heavily loaded or high impact systems, i.e. greater than 25 lbs./ft<sup>2</sup> (120 Kg/m<sup>2</sup>).

**For the number of wear strips see the product data sheets.** The expansion and contraction of the wear strips or plate needs to be accommodated in any support configuration. Adequate accommodation is needed to prevent the wear strip or plate from buckling or expanding into sprockets, the frame, etc. Shoulder screws in slots may be an adequate solution to allow material expansion. Always keep screw heads below the sliding surface. An angled plate shape  $p = \text{belt pitch}$  should provide smooth belt transfer. Bevel wear strip or plate edges for smooth belt transfer.

Formula to calculate the necessary clearance  $d$ :

$$d > \Delta l = l / 1000 \cdot \alpha \cdot (T - 20 \text{ }^\circ\text{C}) \text{ [mm]}$$

- $l$  = Length at installation temperature (20 °C) [mm]
- $T$  = Max. operating temperature [°C]

For radius belts please refer to page 48.

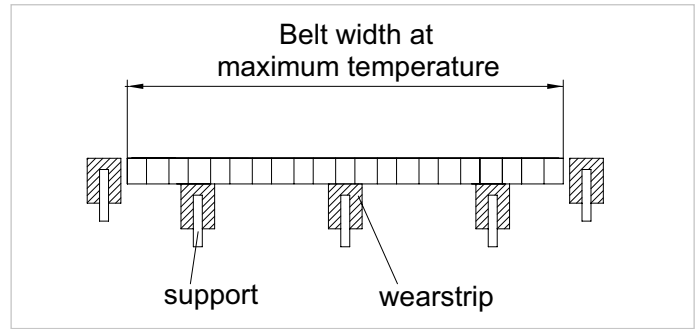


Figure 430: For straight running belts

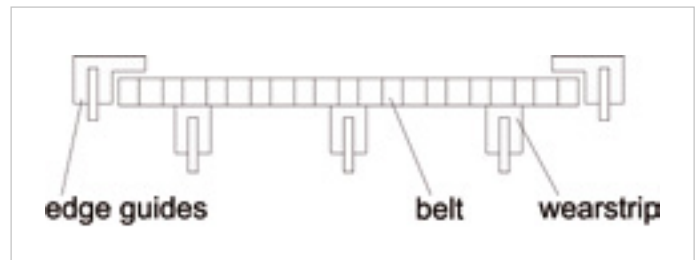


Figure 460: For radius belts

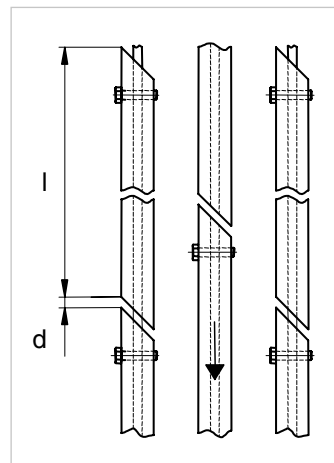


Figure 440: Version A

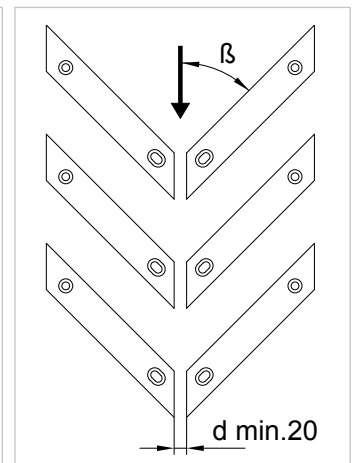


Figure 450: Version B

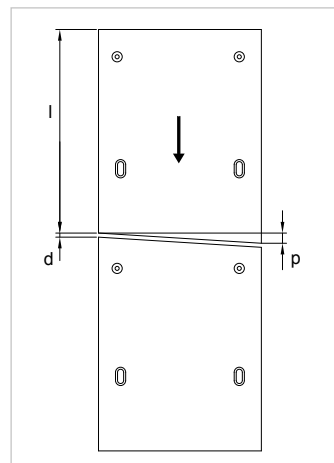


Figure 455: Version C

Material	$\alpha$ [mm/(m · °C)]	
	-73 – 30 °C -100 – 86 °F	31 – 100 °C 87 – 210 °F
PE40, TP40	0.14	0.20
PET	0.06	0.08
PA6G-LF	0.08	0.10
Steel	0.01	0.01

### Wear strip material and guiding profiles

The operating environment for the conveyor belt dictates the most suitable wear strip material for the conveyor system. For suitable wear strip materials and recommendations see pages 18 and 19. **Please also consult the separate Habiplast brochure.** U-shaped profiles (MB 01) are commonly used as wear strips for slider supports, fitted onto a simple metal strip of 2.2 mm (0.09") to 5 mm (0.2") thickness. Type MB 01T offers a wider support area.

Accommodation must be made to allow plastic wear strips secured with screw fasteners to thermally expand and contract. The most common method is to secure the tail edge of the wear strip with a screw. The head of the fastener is countersunk below the wear strip's top surface (if fixed from the top). Each successive hole in the wear strip is elongated (slot) and countersunk. Each fastener in the elongated (slot) holes is loosely fitted into the hole to allow the wear strip to freely expand or contract under the fastener head.

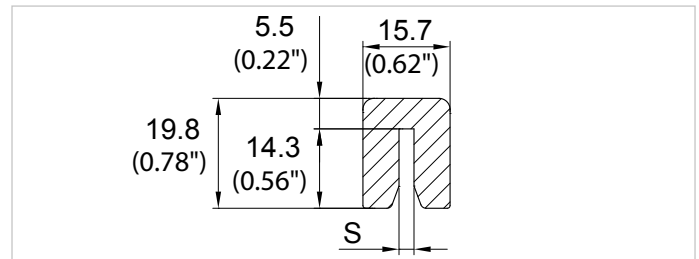


Figure 470: MB 01 type

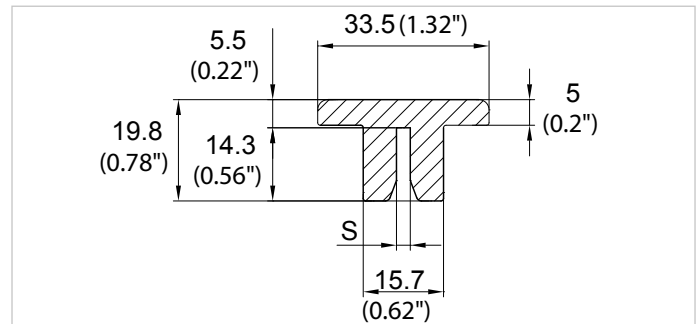


Figure 480: MB 01T type

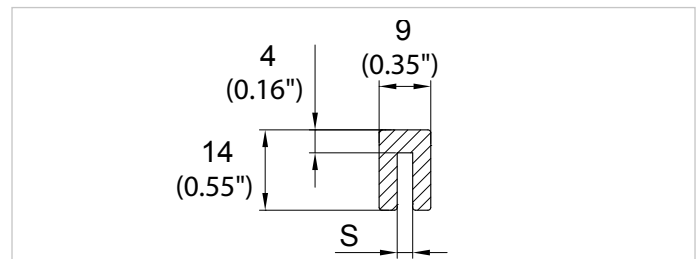


Figure 495: GL-2 type

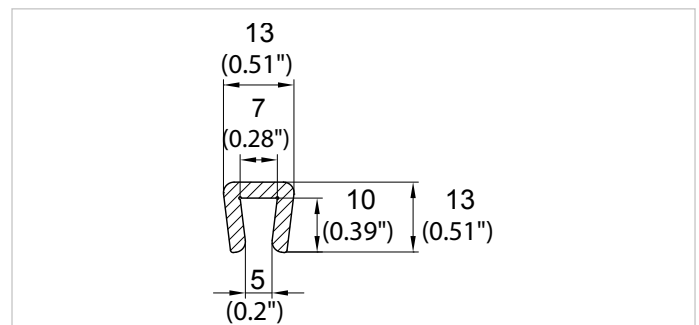


Figure 497: GL-7 type

# Design guide

## Slider support systems

**L-shaped guides** (MB 02) are mainly used as hold-down guides for radius belts. See also the design guide for the radius belt.

Type MB 02 is suitable for the 1" radius belt, the MB 02U is larger to fit the thicker 1.5" radius belt. Special dimensions are possible on request. (Figs. 500 and 510)

Type	S	
	mm	inch
MB 01-X	2.2	0.09
MB 01-A	2.7	0.11
MB 01-B	3.2	0.13
MB 01-C	4.5	0.18
MB 01-D	5.2	0.20
GL-2	3.2	0.13
GL-2A	2.2	0.09
GL-2B	4.2	0.17
MB 01T-X	2.2	0.09
MB 01T-A	2.7	0.11
MB 01T-B	3.2	0.13
MB 01T-C	4.5	0.18
MB 02S-X	2.2	0.09
MB 02S-A	2.7	1.11
MB 02S-B	3.2	0.13
MB 02S-C	4.5	0.18
MB 02S-D	5.2	0.20
MB 02U-X	2.2	0.09
MB 02U-A	2.7	0.11
MB 02U-B	3.2	0.13
MB-02U-C	4.5	0.18

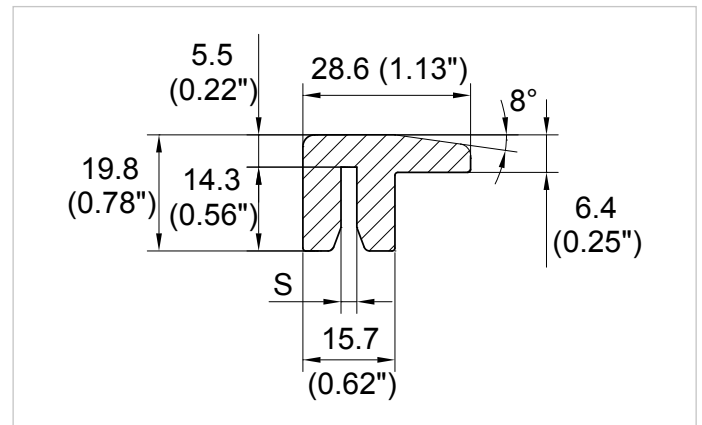


Figure 500: MB 02S type

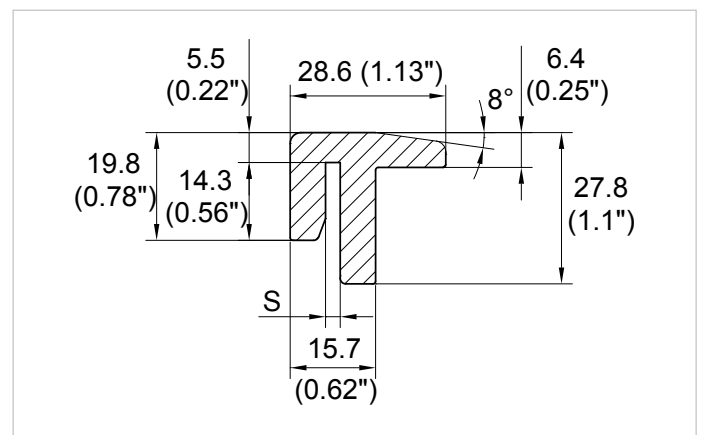


Figure 510: MB 02U type

### Comb (finger plate) installation (Fig. 525)

For the main dimensions and instructions for combs please see the product data sheet. The plates contain slots. Special bushings and screws are delivered with the plates; they allow free lateral movement to compensate for thermal expansion or contraction of the belt. For belt widths up to 300 mm (12"), the plates can be firmly fixed.

Fingerplate mounting must begin at the belt's center line, working towards the outside belt edges.

### Screw position (Fig. 530)

The application operating temperature influences the positioning of the shoulder bolts.

- **When operating temperatures exceed environmental temperatures:** The fingerplate shoulder bolts are positioned at the outer edge of the mounting holes allowing the fingerplates to laterally move with belt width expansion.
- **When operating temperatures are below environment temperatures:** The fingerplate shoulder bolts are positioned at the inner edge of the mounting holes allowing the fingerplates to laterally move with belt width contraction.

**Fingerplate installation for Series 208 RR and FF620-WR fingerplate positioning (Fig. 540):** Fingerplates are mounted using shoulder bolts, with the upper surface of the fingerplate positioned 1 mm (0.4") below the top surface of the belt.

Note:

Dimensions						
Number of sprocket teeth	A		B		BH	
	mm	inch	mm	inch	mm	inch
<b>Series 208 Comb A (Extended Dead Plate)</b>						
10	108	4.25	63.5	2.5	50.8	2
12	111.3	4.38	66.8	2.63	58.4	2.3
18	117.6	4.63	73.2	2.88	82.6	3.25
19	120.7	4.75	76.2	3	88.6	3.41
20	122.2	4.81	77.7	3.06	90.4	3.56
<b>Series 208 Comb B (Short Dead Plate)</b>						
10	63.5	2.5	-	-	50.8	2
12	66.8	2.63	-	-	58.4	2.3
18	73.2	2.88	-	-	82.6	3.25
19	76.2	3	-	-	88.6	3.41
20	77.7	3.06	-	-	90.4	3.56
<b>Series FF62000-WR Comb</b>						
6	138	5.44	-	-	54	2.14
8	138	5.44	-	-	70	2.76
10	138	5.44	-	-	86	3.38
12	138	5.44	-	-	102	4.01
16	138	5.44	-	-	134	5.27

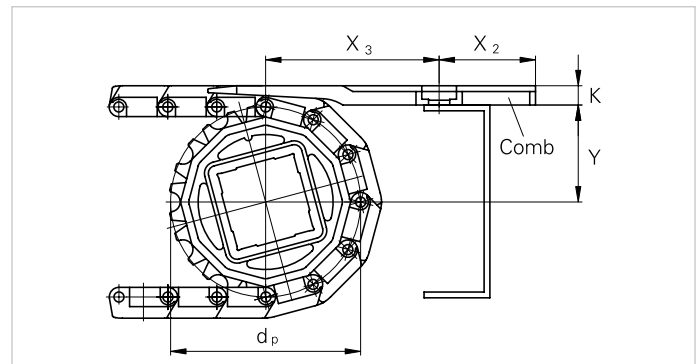


Figure 525

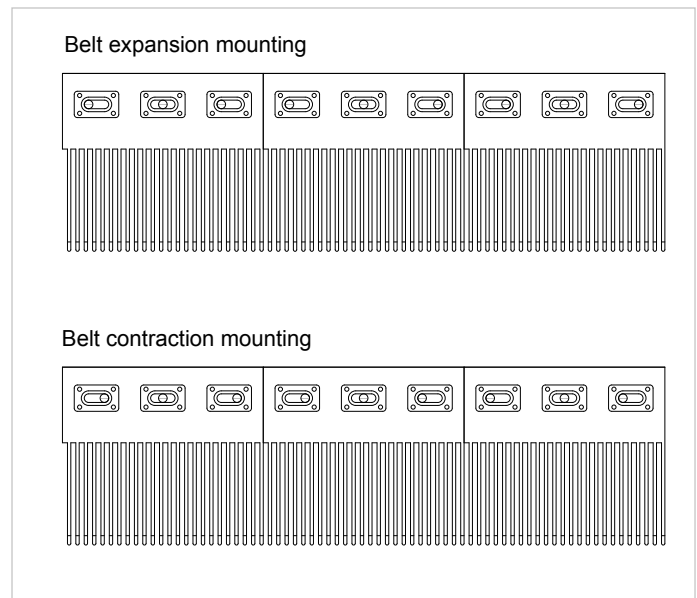


Figure 530

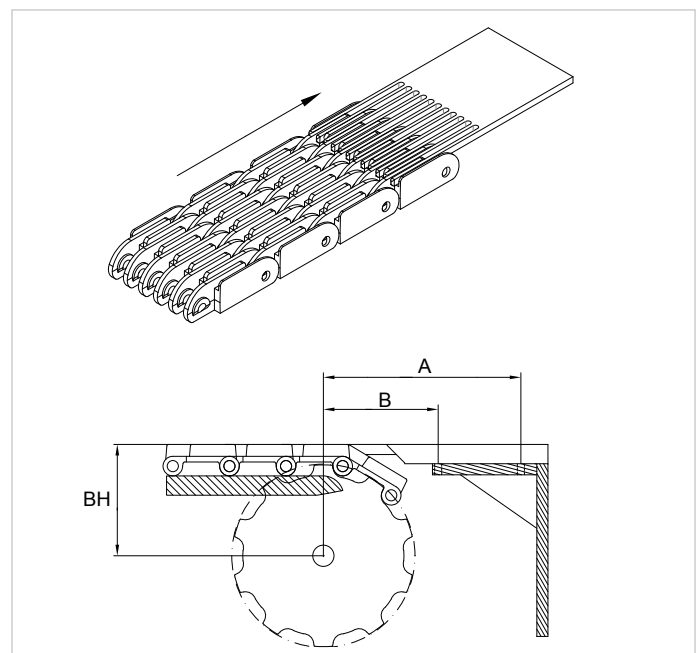


Figure 540

### Transfer plates for product transfer (Fig. 550)

Transfer plates D are used for product transfer at the conveyor ends of flat top and flush grid belts. The discharge end should be adjusted to 1 mm (0.04") below the belt surface and the infeed end 1 mm (0.04") above the belt surface. The gap ( $X_5$ ) varies during belt movement, but should be as small as possible when the belt hinge passes the edge of the plate.

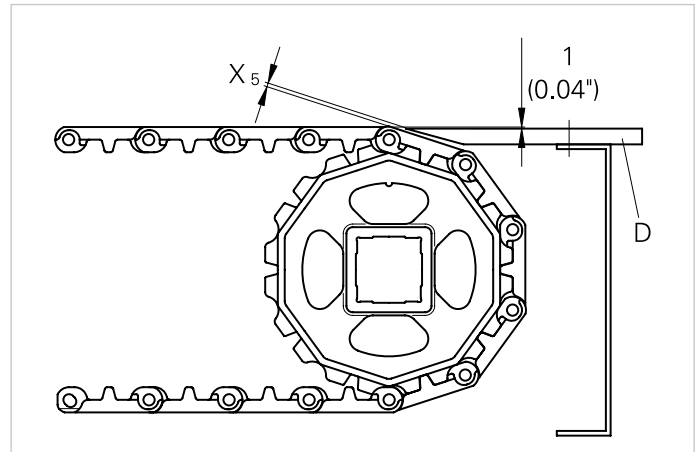


Figure 550

### Curved top belts (Fig. 560)

Belts with a curved top surface allow the dead plate gap ( $X_5$  Figure 550) to be eliminated. This facilitates smooth transfers by allowing the transfer plate(s) to maintain continuous contact with the arc formed as the belt wraps around the drive sprocket.

Curved top belts form a smooth outer radius with the following belt/sprocket combinations:

- 0.5" pitch curved top with a 0.75" nosebar
- 1" pitch curved top with 9 tooth sprockets
- 2" pitch curved top with 12 tooth sprockets

The gap to the transfer plate can be significantly reduced with all curved top belts. Scrapers can be applied to clean the belt surface. Due to the curved top surface product contact with the belt is reduced. Smoother product transfer can also be achieved when using other sprocket sizes than recommended.

**Patent protected**

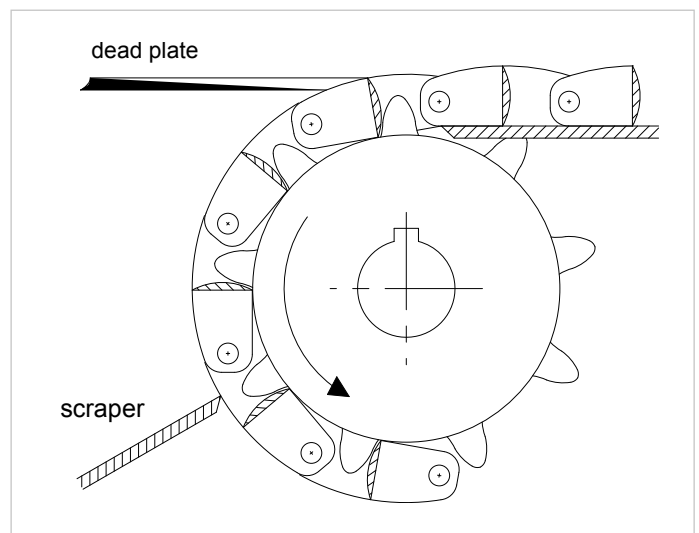


Figure 560

### Nosebar transfer for micropitch and minipitch belts

The micropitch belt (Series M0800) and the minipitch belts (Series M1100, M1200 and SM605) are perfectly suited for dynamic or static nosebars. This allows smooth and gentle transfer of the product with a short sliding distance to the following belt or table.

For certain transfer conditions a minimum diameter is possible. In this case the smoothness of the transfer may be reduced to some extent.

Please respect the correct geometric dimensions of rollers and transfer components.

Series	M0800	M1100	M1200	SM, CM605
	mm inch	mm inch	mm inch	mm inch
Minimal backbending roller diameter A	50 2	75 3	75 3	75 3
Minimal straight belt section B between drive and snub roller	50 2	50 2	50 2	50 2
Distance C1 between nosebars	16 0.63	22 0.9	30 1.2	30 1.2
Distance C2 Maximum width of transport plate	-	16 0.6	25 1	25 1
Recommended nosebar diameter D	6 0.24	12.7 0.5	18 0.71	19 0.75
Minimum nosebar diameter D	6 0.24	12.7 0.5	18 0.71	19 0.75

For high speed applications a temperature conductive material e.g. hard chrome plated steel nosebar is needed.

Note: high speed nosebar applications can be noisy.

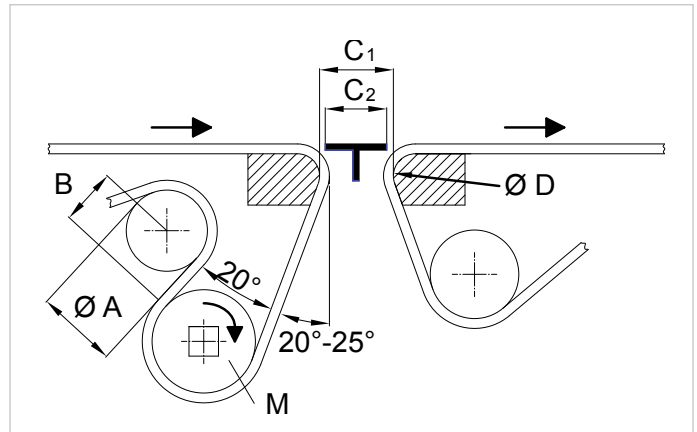


Figure 570

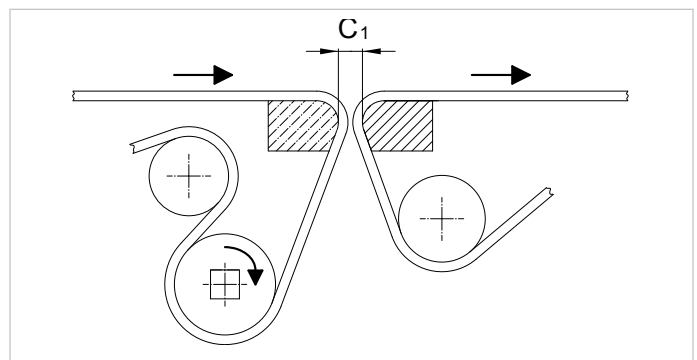


Figure 575: For M0800

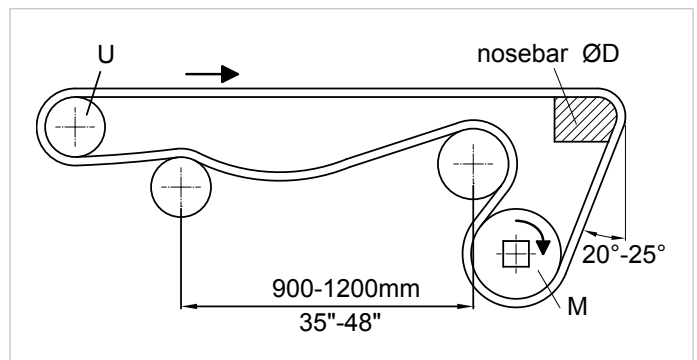


Figure 580

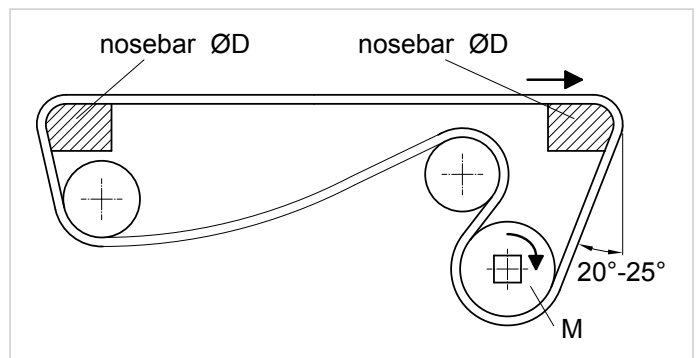


Figure 590



### Habasis support for design and calculation

Habasis provides a calculation program **LINK-SeleCalc** to analyze the forces and verify the admissible belt strengths for different conveyor designs.

For any further questions and additional documentation please contact Habasis.

The screenshot displays the LINK-SeleCalc software interface, organized into several sections:

- Header/Navigation:** Includes fields for 'Company' (Test), 'Projects' (Test\_2), 'Units' (Metrisch), and 'User' (Pro). There are also icons for adding, editing, and deleting items, and a 'Share this project' toggle set to 'Aus'.
- Belt selection:** A panel with a 'Clear selection' button and dropdown menus for 'Belt style', 'Belt code', 'Belt material', and 'Rod material'. A list of options is visible below the dropdowns: 10G 10 POM U/PP, 10G 10 POM/PA, 10G 10 POM/PP, and 10G 10 POM+LF/PA.
- Dimensions:** A panel with input fields for 'Bandbreite' (0 mm), 'Conveying length' (mm), 'Conveying height (elevator)' (mm), and 'Incline angle' (°).
- Conveyed load:** A panel with input fields for 'Entire load (mP)' and 'Entire accumulation load (mPa)', both in kg.
- Calc Area:** A results panel on the right with a list of calculated values in empty input boxes: Service Factor, Temp Factor, Number Of Sprockets Tail Shaft, Number Of Sprockets Drive Shaft, Torque, Required Motor Power, Speed Factor, Adjusted Tensile Force, Admissible Tensile Force, Adm. Tensile Force Util, Defl Bear Tail Shaft, Defl Bear Drive Shaft, and Torsion Angle.

## Effective tensile force (belt pull) $F'_E$

### Horizontal straight belt without accumulation

$$F'_E = (2 m_B + m_P) l_0 \cdot \mu_G \cdot g \text{ [N/m]}$$

### Horizontal straight belt with accumulation, simplified

$$F'_E = [(2 m_B + m_P) l_0 \cdot \mu_G + m_P \cdot \mu_P \cdot l_a] g \text{ [N/m]}$$

### Inclined conveyor without accumulation

$$F'_E = [(2 m_B + m_P) l_1 \cdot \mu_G + m_P \cdot h_0] g \text{ [N/m]}$$

### Inclined conveyor with accumulation, simplified

$$F'_E = [(2 m_B + m_P) l_1 \cdot \mu_G + m_P \cdot \mu_P \cdot l_a + m_P \cdot h_0] g \text{ [N/m]}$$

### Further analyses of tensile forces caused by accumulated products

The above equations with accumulation are based on the simplification that the product load per  $m^2$  of belt is the same over the accumulation length as when moving with the conveyor. This is generally not the case. In reality the density of the product distribution over the accumulation length  $l_a$  will be higher. Since this value is often unknown, it is common practice to use the same product load value for accumulation as for conveying.

In this case the above formulas have been used. The calculated force is somewhat too low, but normally not critical for straight belts. If the accumulated product load per  $m^2$  is known, and for more accurate calculation, replace  $m_P$  in the term  $m_P \cdot \mu_P \cdot l_a$  by  $m_{Pa}$ .

The following formulas result:

### Horizontal straight belt with accumulation

$$F'_E = [(2 m_B + m_P) l_0 \cdot \mu_G + m_{Pa} \cdot \mu_P] g \text{ [N/m]}$$

### Inclined conveyor with accumulation

$$F'_E = [(2 m_B + m_P) l_1 \cdot \mu_G + m_{Pa} \cdot \mu_P \cdot l_a + m_P \cdot h_0] g \text{ [N/m]}$$

$g$  = Acceleration factor due to gravity ( $9.81 \text{ m/s}^2$ )


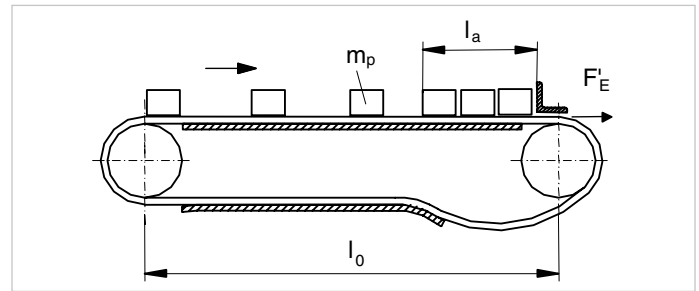


Figure 600

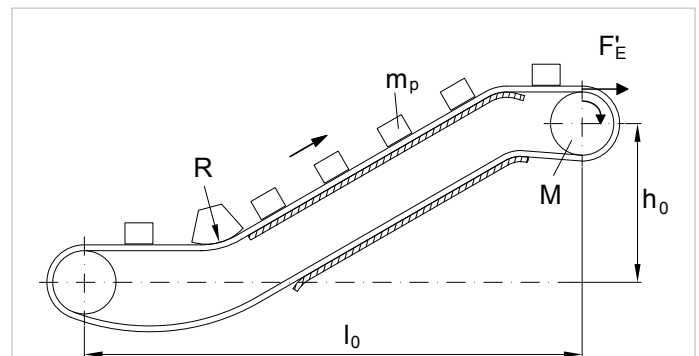

- $F'_E$  = Effective tensile force [N/m]
- $m_B$  = Weight of belt [ $\text{kg/m}^2$ ]
- $m_P$  = Weight of conveyed product [ $\text{kg/m}^2$ ]
- $m_{Pa}$  = Weight of accumulated product [ $\text{kg/m}^2$ ]
- $\mu_G$  = Coefficient of friction belt to slider support
- $\mu_P$  = Coefficient of friction belt to product
- $l_0$  = Conveying length [m]
- $l_a$  = Length of accumulation [m]
- $h_0$  = Height of elevation [m]
- $R$  = Back flexing radius

Figure 610

# Calculation guide

## Effective tensile force (belt pull) $F'_E$

### Radius belts

Radius belts have higher friction losses than straight belts due to the radial forces directed to the inside of the curve. It must also be taken into account that in the belt curves tensile forces are not distributed over the total belt width but are concentrated at the outer belt edge.

### Admissible tensile forces ( $F_{adm}$ ) for radius belts (see also page 72)

Since the belt pull in the curve is concentrated at the outer belt edge, the admissible belt force is limited by the belt strength of the outermost belt modules. Therefore the absolute tensile forces  $F_{SR}$  [N] are applied for comparison with the nominal belt strength  $F_N$ .

To calculate radius belts please consult Habasit's LINK-SeleCalc program.

### Note

Due to the concentration of the belt pull (tensile forces) on the outer belt edge at the curve end, the applicable number of curves is very limited. In practice one to two curves are often used. For long radius belts it is advisable to place the curve as near to the idling shaft as possible. This way the belt pull at the outer curve edge is minimized.

### Nominal strength for radius belts in curves

The nominal strength for radius belts in curves increases with wider belts (bigger radius). Due to the smaller angle between the modules the forces are distributed over more links. For high loads the application of steel rods may be advisable to increase belt stiffness.

Please contact your Habasit representative for detailed information.

An appropriate quality of conveyor, especially regarding smooth and low coefficient of friction, inside wear strips and smooth start-up, is important. The belt on the return way must be properly held down by wear strips or hold-down tabs as described in the design guide.

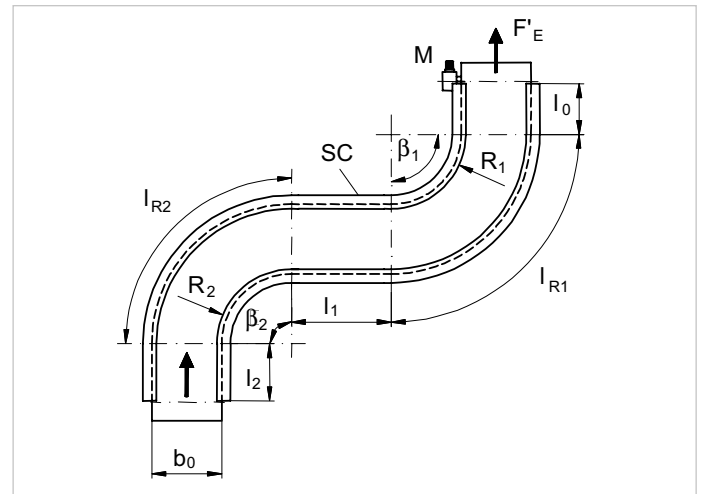


Figure 620

# Calculation guide

## Admissible tensile force $F_{adm}$

Speed and temperature reduce the maximum admissible tensile force  $F_{adm}$  below nominal tensile strength  $F'_N$ . For nominal tensile strength  $F'_N$  please refer to the product data sheets.

$F'_{adm}$  = Admissible tensile force [N/m]  
 $F'_N$  = Nominal tensile strength [N/m]  
 $c_T$  = Temperature factor (see diagram below)

$$F'_{adm} = F'_N \cdot c_T \cdot c_v \text{ [N/m]}$$

For radius belt calculations absolute tensile forces are applied (N). See also the calculation guide for radius belts.

### Speed factor $c_v$

The belt speed increases the stress on the belt mainly at the point where the direction of movement is changing:

- Driving sprockets
- Idling shafts with or without sprockets
- Support rollers
- Snub rollers

Centrifugal forces and sudden link rotations increase the forces on the belt and belt wear. These impacts are substantially increased above 30 m/min (98 ft/min).

### Lifetime (influence of belt length and sprocket/roller size)

The calculation with  $c_v$  does not take into account the influence of the conveyor length and sprocket/roller sizes used. These design features influence belt lifetime, because the number and angle of link rotations depend on them. The bigger the number and / or angle of rotation, the greater the wear in the link and the earlier the belt will be lengthened to its limit.

General rule:

- Doubling the length reduces the number of link rotations by half and vice versa.
- Doubling the sprocket/roller diameter reduces the angle of link rotation by half and vice versa.

Consequently belt lifetime increases/decreases in the same relation. For belt lifetime, lengthening of the belt is a main criterion. The initial length is measured after running-in, generally for about one hour.

General rule: The maximum **allowable belt lengthening is approx. 3%** of the belt length. When this value is reached, the belt should be exchanged. Belt lifetime cannot easily be predicted since the rate of wear on the links and consequent lengthening depends on the process and environmental conditions (dust, sand and other contaminants).

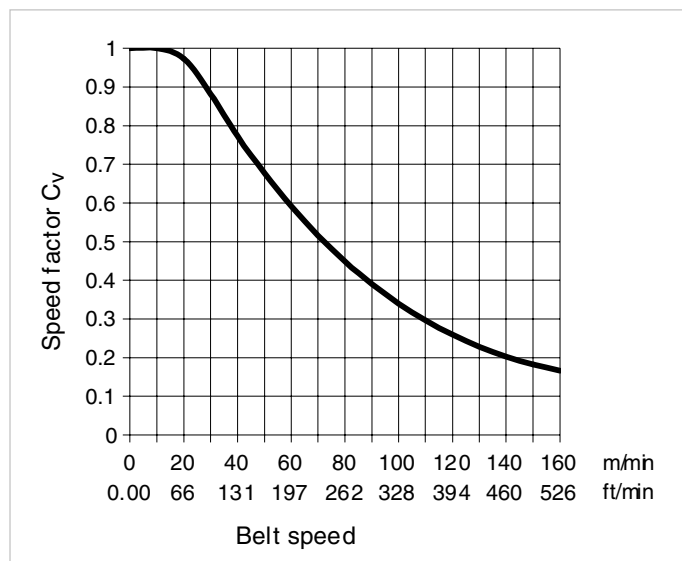


Figure 630

# Calculation guide

## Admissible tensile force $F_{adm}$

### Temperature factor $c_T$

The measured breaking strength (tensile test) of thermoplastic material increases at temperatures below 20 °C (68 °F). At the same time other mechanical properties are reduced at low temperatures. For this reason:

At temperatures < 20 °C (68 °F):  $c_T = 1$

### Standard materials

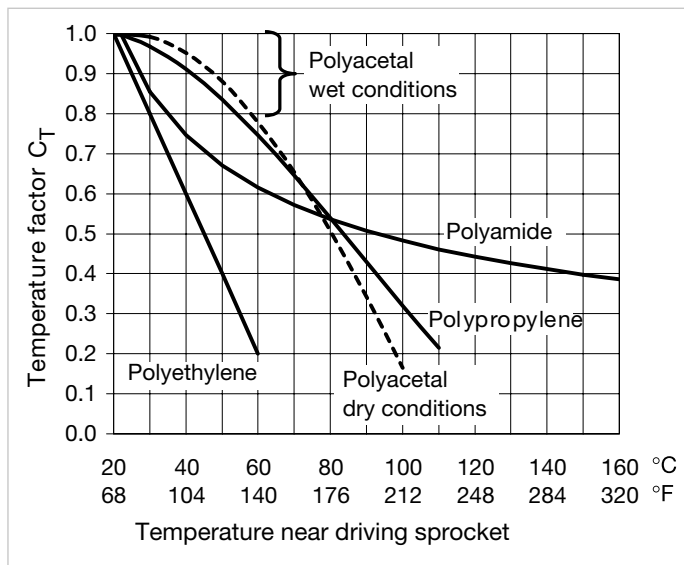


Figure 640

### Special materials

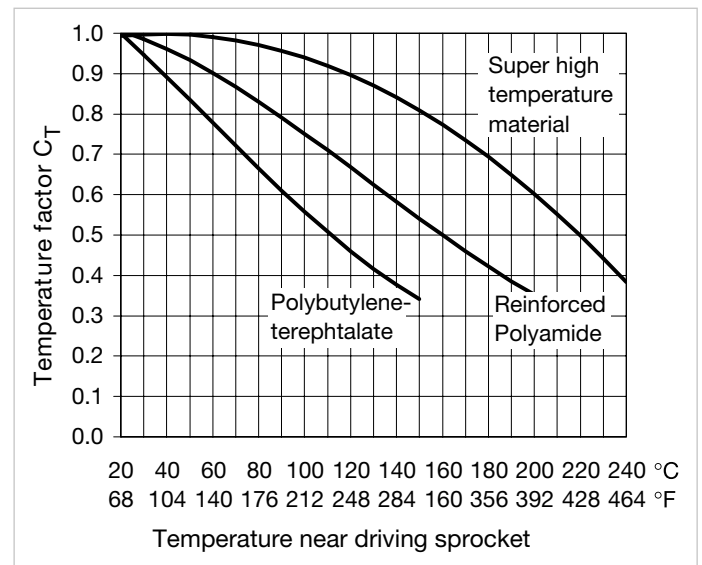


Figure 650

Select shaft type, shaft material and size. The shaft must fulfill the following conditions:

- Max. shaft deflection under full load ( $F_W$ ):

$$f_{\max} = 2.5 \text{ mm (0.1")}$$

For a more accurate approach please refer to the LINK-SeleCalc program. If the calculated shaft deflection exceeds this maximum value, select a bigger shaft size or install an intermediate bearing on the shaft.

- Torque at max. load  $F'_S$  below critical value (admissible torque, see table "Maximum admissible torque").  
(For key to symbols see pages 85 and 86)

### Shaft deflection

$$\text{2 bearings: } f = 5/384 \cdot F_W \cdot l_b^3 / (E \cdot I) \text{ [mm]}$$

$$\text{3 bearings: } f = 1/2960 \cdot F_W \cdot l_b^3 / (E \cdot I) \text{ [mm]}$$

For uni-directional head drives:  $F_W = F'_S \cdot b_0$

For lower head drives:  $F_W = 1.5 \cdot F'_S \cdot b_0$

For bi-directional center drives:  $F_W = 2 \cdot F'_S \cdot b_0$

For uni-directional pusher drives:  $F_W = 2.2 \cdot F'_S \cdot b_0$

For bi-directional pusher drives:  $F_W = 3.2 \cdot F'_S \cdot b_0$

**Note:** pusher drives need a tensioning device

$b_0$  = Belt width [m]

$l_b$  = Distance between bearings [mm]

If the effective distance is not known use  
belt width + 100 mm

### Torque on journal (shaft end on motor side)

The torque is calculated in order to evaluate the shaft journal diameter needed for transmission. Verify the selected size of the shaft journals by comparing the effective torque ( $T_M$ ) with the **admissible torque** indicated in the table "Maximum admissible torque".

$$\text{Effective torque: } T_M = F'_S \cdot b_0 \cdot d_P / 2 \cdot 10^{-3} \text{ [Nm]}$$

$$\text{Admiss. torque: } T_{\text{adm}} = \tau_{\text{adm}} \cdot p \cdot d_W^3 / 16 \cdot 10^{-3}$$

$$\text{Simplified: } T_{\text{adm}} = \tau_{\text{adm}} \cdot d_W^3 / 5000 \text{ [Nm]}$$

$b_0$  = Belt width [m]

$d_P$  = Pitch diameter of sprocket [mm]

$\tau_{\text{adm}}$  = Max. admissible shearing stress [N/mm<sup>2</sup>]

For carbon steel approx. 60 N/mm<sup>2</sup>

For stainless steel approx. 90 N/mm<sup>2</sup>

For aluminum alloy approx. 40 N/mm<sup>2</sup>

$d_W$  = Shaft diameter [mm]

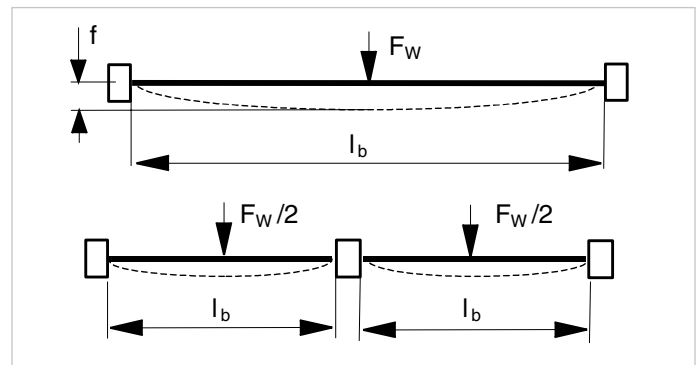


Figure 660

# Calculation guide

## Calculation of the catenary sag

Catenary sag (belt sag) is an unsupported length of the belt used to absorb belt length variations caused by thermal expansion/contraction and load changes on the belt. In addition, due to its weight the sag exerts tension on the belt, which is necessary for firm engagement of the sprockets in the belt. This tension depends on the length ( $l_c$ ) and height ( $h_c$ ) of the sag and the distance to the drive sprockets.

The following minimal tension force should be applied by the catenary sag for proper sprocket engagement (catenary sag after drive sprockets):

- 0.3" belts: 50 N per m belt width (3.5 lb/ft)
- 0.5" and 1" belts: 75 N per m belt width (5 lb/ft)
- 1.5" and 2" belts: 100 N per m belt width (7 lb/ft)
- 2.5" belts: 125 N per m belt width (9 lb/ft)

Experience shows that the sag of the dimensions recommended on page 39 provides the belt tension needed for proper engagement of the sprockets. For belts running in cold environments (freezers, etc.) additional belt length should be considered in the catenary layout to compensate for belt shortening (see the next page).

### Belt tension of catenary sag $F'_c$

$$F'_c = (l_c^2 \cdot m_B \cdot g) / (8 \cdot h_c) \text{ [N/m]}$$

Example:

For  $l_c = 1 \text{ m}$ ,  $m_B = 10 \text{ kg/m}^2$ ,  $h_c = 0.122 \text{ m}$ ,  
we get:  $F'_c = 100 \text{ N/m}$  ( $\approx 10 \text{ kg/m}$ )

### Required distance length $l_c$

$$l_c = ((F'_c \cdot 8 \cdot h_c) / (m_B \cdot g))^{0.5}$$

Example for a 1" belt:

For  $F'_c = 150 \text{ N per m belt width (10 lb/ft)}$ ,  $m_B = 10 \text{ kg/m}^2$ ,  $h_c = 0.075 \text{ m}$ , we get:  $l_c = 1 \text{ m}$

- $F'_c$  = Belt tension of catenary sag [N]
- $l_c$  = Length of the sag [m]
- $h_c$  = Height of the sag [m]
- $m_B$  = Weight of belt [ $\text{kg/m}^2$ ]
- $g$  = Acceleration factor due to gravity ( $9.81 \text{ m/s}^2$ )

**NOTE: The first catenary sag after the drive should not exceed 152 mm (6") in height. If the conveyor length does not allow for a sufficient number of catenary sags to compensate thermal changes in belt length, a gravity take-up assembly is required.**

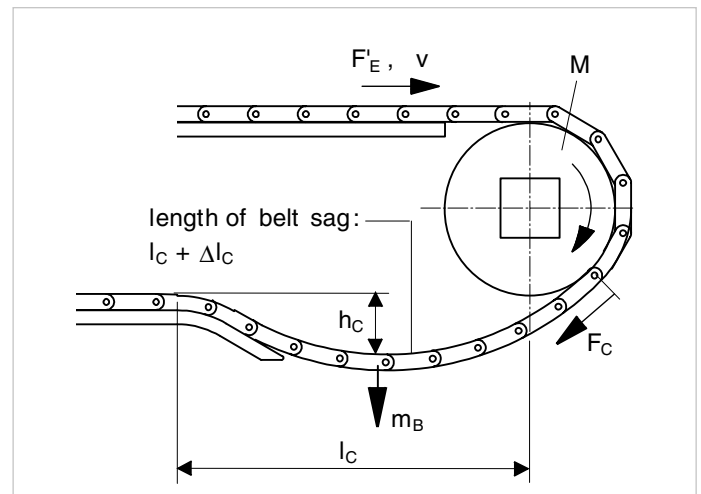


Figure 670

# Calculation guide

## Effective belt length and width

After the sag length ( $l_c$ ) and height ( $h_c$ ) have been established, it is important to calculate the excess belt length ( $\Delta l_c$ ) required by the sag (see formula below). This permits calculation of the final belt length needed.

$$\Delta l_c = 2.66 \cdot (h_c/1000)^2/l_c \text{ [m]}$$

$$l_g = 2 \cdot l_0 + d_p/1000 \cdot \pi + 2.66 \cdot (h_c/1000)^2/l_c \text{ [m]}$$

$l_g, l_0, l_c$  = Length [m]  
 $d_p$  = Pitch diameter of sprocket [mm]  
 $h_c$  = Height of catenary sag [mm]

The calculated geometrical belt length ( $l_g$ ) is the total belt length, which equals the length of the transport side plus the return side, and the sprocket circumference plus the excess length of the catenary sag ( $\Delta l_c$ ). The final length of the assembled belt will be somewhat longer than the calculated length, due to the clearance between the pivot rod and the bore in the link (hinge clearance). The excess length may be around 1% of the belt length.

### Influence of thermal expansion

After installation the belt may be heated or cooled by the process, so its length will change and consequently the height  $h_c$  of the catenary sag will change as well. The resulting belt length difference will have to be compensated for within the tolerance of the sag height. For recommended dimensions of the catenary sag see pages 39 – 40. The sag height should not be below 25 mm. If the process temperature deviates from the installation temperature, correct the calculated belt length as indicated by this formula:

$$l_g(T) = l_g + l_g/1000 \cdot \alpha \cdot (T_2 - T_1) \text{ [m]}$$

$l_g$  = Total belt length [m]  
 $T_1$  = Installation temperature [°C]  
 $T_2$  = Process temperature [°C]  
 $\alpha$  = Coeff. of linear thermal expansion

Belt material	Coeff. of linear thermal expansion $\alpha$	
	mm/(m · k)	in/(ft · °F)
Polypropylene	0.13	0.00087
Polyethylene	0.20	0.00133
Polyoxymethylene (Acetal)	0.09	0.00060
Polybutyleneterephthalate	0.12	0.00078
Polyamide	0.12	0.00078
Polyamide reinforced	0.08	0.00053
Super high temperature material	0.05	0.00033



### **Dimensional changes due to moisture**

Dimensional changes due to moisture absorption are generally quite small under common operating conditions. Therefore for all HabasitLINK® thermoplastic materials used, dimensional changes due to moisture absorption do not have to be considered, except for polyamide.

HabasitLINK® polyamide products absorb moisture from the air and reach an equilibrium at about 2.8% water at 50% RH (relative humidity) and at about 8.5% at 100% RH. The day-to-day or week-to-week variations in relative humidity have little effect on the total moisture content of HabasitLINK® polyamide products.

### **PA rods**

PA rods can also absorb moisture which mainly affects the rod length. The typical elongation of an unconditioned PA rod from dry to wet environments is between 1% and 2% of rod length. This should be considered when using PA rods. Habasit recommends reducing the PA rod length as follows:

#### **Unconditioned PA rods**

For dry applications (humidity < 60%) 1%  
For wet applications (humidity > 60%) 2%

#### **Conditioned PA rods**

For dry applications (humidity < 60%) 0%  
For wet applications (humidity > 60%) 1%

# Material properties

## Chemical resistance

The data presented in the following table is based on the information given by the raw material manufacturers and suppliers. It does not remove the need for qualification testing of the products for your application. In individual cases the stability of the material in the medium in question should be examined.

Code: ● = Good resistance ○ = Conditionally/sometimes resistant ○ = Not resistant (do not use)

Designation of chemical	Polypropylene (PP)		Polyethylene (PE or PE-UHMW)		Polyoxymethylene (POM) Acetal		Polyamide (PA)		Super high temperature material (ST)			Thermoplastic polyurethane (TPU)		Thermoplastic elastomer (TPE)		Flame retardant polybutylene terephthalate (PBT)	
	Also valid for +FR, +AS, +EC, +FC, +GH, +DE, +HW and +H15		Also valid for +DE and +H15		Also valid for +AS, +EC, +DE, +UV, +IM, +JM, +LF, +PK and +UF		Also valid for +GF, +HT, +HN, +RM and +IM							Also valid for +FR		Also valid for +FR	
Chemical	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	93 °C (200 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)
Acetic Acid > 5%	●	●	●	○	○	○	○	○	●	●	●	○		○		○	○
Acetic Acid – 5%	●	●	●	●	●		○	○	●	●	●	○		○		●	○
Acetone	●	●	●	●	○	○	●	●	●	●	●			○		○	○
Alcohol – all types	●	●	●	●	●	○	●	●	●	●	●	○		○		●	○
Aluminum Comp.	●	●	●	●			●	●	●	●	●						
Ammonia	●	●	●	●	●	●	●	●	●	○	○	●				○	○
Ammonium Comp.	●	●	●	●			●	●	●	●	●					○	○
Aniline	●	●	●	○		○			●	○	○	○				○	
Aqua Regia	○	○	●	○			○	○	○								
Arsenic Acid	●	●	●	●													
Barium Comp.	●	●	●	●			●	●	●	●	●						
Beer	●	●	●	●	●							●					
Benzene	○	○	○	○	○	○	●	●	●	○	○	○				○	○
Benzenesulfonic Acid – 10%	●	●	●	●					●	○	○						
Benzoic Acid	●	●	●	●			○	○	●	○	○	●					
Beverages (soft drinks)	●	●	●	●	●	●	●	●									
Borax	●	●	●	●					●	●	●						
Boric Acid	●	●	●	●			●	●				●					
Brine – 10%	●	●	●	●	●	●											
Butyl Acrylate	○	○	●	○					●	●	●					●	○
Butyric Acid	●		●	○			●	●				●					
Carbon Dioxide	●	●	●	●			●	●	●	●	●					●	●
Carbon Disulfide	○	○	○	○			●	●	●	●	●						
Carbon Tetrachloride	○	○	○	○	●	○	●	●	●	○	○	○					
Chloroacetic Acid	●	●					○	○									
Chlorine – Gas	○	○	○	○	○	○	○	○				○					
Chlorine – Liquid	○	○	○	○	○	○	○	○				○					
Chlorine Water (0.4% Cl)	●	○	●	○	○	○	○	○	○								
Chlorobenzene	○	○	○	○	○	○	●	●	●	○	○	○				○	
Chloroform	○	○	○	○	○	○	○	○	●	○	○					○	

# Material properties

## Chemical resistance

Designation of chemical	Polypropylene (PP)		Polyethylene (PE or PE-UHMW)		Polyoxymethylene (POM) Acetal		Polyamide (PA)		Super high temperature material (ST)			Thermoplastic polyurethane (TPU)		Thermoplastic elastomer (TPE)		Flame retardant polybutylene terephthalate (PBT)		
	Also valid for +FR, +AS, +EC, +FC, +GH, +DE, +HW and +H15	Also valid for +DE and +H15	Also valid for +AS, +EC, +DE, +UV, +IM, +JM, +LF, +PK and +UF	Also valid for +GF, +HT, +HN, +RM and +IM									Also valid for +FR	Also valid for +FR				
Chemical	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	93 °C (200 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	
Chromic Acid – 50%	●	●	●	⊙	○	○	⊙		○			⊙						
Chromic Acid – 3%	●	●	●	●	⊙	⊙			○								●	●
Citric Acid – 40%	●	●	●	●	●	○	●	●				●						
Citric Acid – 10%	●	●	●	●	●		●	●				●					●	⊙
Citrus Juices	●	●	●	●	●		●	●									●	
Coconut Oil	●	●	●	●	●	●	●		●	●	●	●					●	●
Copper Comp.	●	●	●	●			⊙											
Corn Oil	●	●	●	●	●	●	●		●	●	●						●	●
Cottonseed Oil	●	●	●	●	●	●	●		●	●	●	●					●	●
Cresol	●	●	●	⊙			○	○	●	⊙	○	○						
Cyclohexane	●	⊙	○	○			●		●	●	●	⊙						
Cyclohexanol	●	⊙	⊙	○			●		●	●	●	○						
Cyclohexanone	●	⊙	○	○					●	●	●	○						
Detergents	●	●	●	●	●	●	●		●	●	●	●		●		●	●	
Dextrin	●	●	●	●														
Dibutyl Phthalate	●	⊙					●	●										
Diethyl Ether	○	○	○	○	⊙	⊙	●	●	●	●	●						●	⊙
Diethylamine	●	●		○														
Diglycolic Acid – 30%	●	●	●	●														
Diisooctyl Phthalate	●	●																
Dimethyl Phthalate	●	●							●	⊙	○							
Dimethylamine	●						●	●										
Dioctyl Phthalate	●	⊙					●	●	●	⊙	○							
Ethyl Acetate	●	●	⊙	⊙	⊙	○	●	●	●	●	●	○		○		⊙	○	
Ethyl Ether	⊙	⊙							●	●	●	○						
Ethylamine	●	●																
Ethylene Glycol – 50%	●	●	●	●	●	⊙	●	⊙	●	●	●						●	⊙
Ferric/Ferrous Comp.	●	●	●	●	⊙	○			●	●	●							
Formaldehyde – 37%	●	●	●	⊙	●	●			●	●	●	○		⊙				
Formic Acid – 85%	●	⊙	●	●			⊙	○	●	●	●	○		○		⊙	○	
Freon			●	●	⊙	⊙			●	⊙	○							
Fuel Oil # 2	●	⊙	●	○	⊙	⊙	●	●	●	●	●	●		○		●	●	
Fruit Juices	●	●	●	●	●		●					●					●	
Furfural	⊙	⊙	⊙	○			●		●	●	●							
Gasoline	⊙	○	●	○	●	●	●	●	●	●	●							
Glucose	●	●	●	●	●	●						●						

# Material properties

## Chemical resistance

Designation of chemical	Polypropylene (PP)		Polyethylene (PE or PE-UHMW)		Polyoxymethylene (POM) Acetal		Polyamide (PA)		Super high temperature material (ST)			Thermoplastic polyurethane (TPU)		Thermoplastic elastomer (TPE)		Flame retardant polybutylene terephthalate (PBT)	
	Also valid for +FR, +AS, +EC, +FC, +GH, +DE, +HW and +H15	Also valid for +DE and +H15	Also valid for +AS, +EC, +DE, +UV, +IM, +JM, +LF, +PK and +UF	Also valid for +GF, +HT, +HN, +RM and +IM									Also valid for +FR	Also valid for +FR			
Chemical	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	93 °C (200 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)
Glycerol	●	●					●	●				⊙		⊙		●	●
Heptane	○	○	⊙	○	●	●	●	●	●	●	●	●				●	●
Hexane	●	⊙	○	○	●		●	●	●	●	●	●				●	●
Hydrobromic Acid – 50%	●	●	●	●			○	○	○								
Hydrochloric Acid – 35%	●	●	●	●	○	○	○	○	○			⊙					
Hydrochloric Acid – 10%	●	●	●	●	○	○	○	○	○			⊙		⊙		●	○
Hydrofluoric Acid – 35%	●	●	●	●	○	○	○	○	○			○				○	
Hydrogen Peroxide – 3%	●	●	●	●	●	●	⊙	⊙	○			⊙		●		●	⊙
Hydrogen Peroxide – 90%	⊙	⊙	●	⊙	⊙	○	○	○	○			○				●	○
Hydrogen Sulfide	●	●	●	●			●	●	●	●	●						
Igepal – 50%	●	●			●	⊙											
Iodine – Crystals	●	●	⊙	⊙	○	○	○	○	○			○					
Isooctane	○	○	●				●	●	●	●	●	●				●	●
Isopropyl Alcohol	●	●	●	●	●	●	●	●	●	●	●	○		⊙		●	⊙
Jet Fuel	⊙	○	⊙	⊙	●	●	●	●	●	●	●			○		●	●
Kerosene	⊙	○	⊙	⊙	●	●			●	●	●	●		○			
Lactic Acid	●	●	●	●	●	○	⊙	○	●	●	●						
Lanolin	●	⊙	●	●	●	●											
Lauric Acid	●	●	●	●													
Lead Acetate	●	●	●	●			●	●									
Linseed Oil	●	●	●	●	●	●	●	●				●				●	●
Lubricating Oil	●	⊙			●	●	●	⊙	●	●	●	●		○		●	●
Magnesium Comp.	●	●	●	●			●		●	●	●						
Malic Acid – 50%	●	●	●	●			●	●									
Manganese Sulfate	●		●	●			⊙	⊙									
Margarine	●	●	●	●			●										
Mercury	●	●	●	●			●									●	
Methyl Chloride	⊙	⊙					●	●								○	
Methyl Ethyl Ketone	●	⊙	○	○	⊙	⊙	●		●	●	●	○		○		○	○
Methyl Isobut. Ketone	●	⊙							●	●	●						
Methylsulfuric Acid	●	●	●	●													
Methylene Chloride	⊙	○	○	○			⊙	⊙	●	⊙	○	○		○			
Milk	●	●	●	●	●	●	●	●				●					
Mineral Oil	⊙	○	●	⊙	●	●	●		●	●	●	●		○		●	●
Mineral Spirits	⊙	○							●	●	●			○		●	●
Molasses	●	●	●	●			●	●				●					
Motor Oil	●	⊙			●	●	●	●	●	●	●	●		○		●	●



# Material properties

## Chemical resistance

Designation of chemical	Polypropylene (PP)		Polyethylene (PE or PE-UHMW)		Polyoxymethylene (POM) Acetal		Polyamide (PA)		Super high temperature material (ST)			Thermoplastic polyurethane (TPU)		Thermoplastic elastomer (TPE)		Flame retardant polybutylene terephthalate (PBT)	
	Also valid for +FR, +AS, +EC, +FC, +GH, +DE, +HW and +H15		Also valid for +DE and +H15		Also valid for +AS, +EC, +DE, +UV, +IM, +JM, +LF, +PK and +UF		Also valid for +GF, +HT, +HN, +RM and +IM							Also valid for +FR		Also valid for +FR	
Chemical	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	93 °C (200 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)	20 °C (70 °F)	60 °C (140 °F)
Sulfur Dioxide	●	●	●	●	○	○	⊙	⊙									
Sulfuric Acid – 10%	●	●	●	●	●	○	○	○	●	⊙	○	⊙		●		●	●
Sulfuric Acid – 50%	●	●	●	●	○	○	○	○	⊙	○	○	⊙		●		⊙	
Sulfuric Acid – 70%	●	⊙	●	⊙	○	○	○	○	○	○	○	⊙				○	
Sulfurous Acid	●		●	●			⊙	⊙									
Tannic Acid – 10%	●	●	●	●													
Tartaric Acid	●	●	●	●			●	⊙				●					
Tetrahydrofuran	⊙	○			⊙	⊙	●										
Toluene	○	○	○	○	⊙	○	●	●	●	●	●	⊙				●	○
Transformer Oil	●	⊙	●	⊙			●	●	●	●	●	●		○			
Tributyl Phosphate	●	⊙															
Trichloroacetic Acid	●	●	⊙				○	○									
Trichloroethylene	○	○	○	○	⊙	⊙	⊙	○				○				⊙	○
Tricresyl Phosphate	●	⊙															
Trisodium Phosphate	●	●	●	●													
Turpentine	⊙	○	●	○	●		●	●				⊙				●	●
Urea	●	●	●	●	●		●	●				●				●	
Vinegar	●	●	●	●	●	●	●	●	●	●	●	⊙					
Wine	●	●	●	●	●	●	●	●	●	●	●	●					
Xylene	○	○	○	○	●	●	●	●				⊙				⊙	○

### → Tracking problems

Possible cause	Recommended measures
Sprockets not "timed" correctly	If the total number of teeth is not divisible by four, the sprockets must be "timed" by aligning the timing marks.
Sprockets on drive and idle shaft misaligned; locked sprocket on drive or idle shaft has incorrect placement or is loose	The center sprocket on the drive and idle shafts must be aligned and engaging the belt. Check the retaining devices to ensure the sprockets are secured.
Conveyor frame not level and square	Check and adjust if necessary.
Drive and idle shafts are not level and square with each other	Check and adjust if necessary to ensure that drive and idle shafts are level and square.
Bad splice in belt	Inspect belt for a bad splice.

### → Sprocket engagement fails

Possible cause	Recommended measures
Sprockets not "timed" correctly	If the total number of teeth is not divisible by four, the sprockets must be "timed" by aligning the timing marks.
Insufficient belt tension	Check to see that there is sufficient length for the catenary sag located in the recommended area, see design guide.
Arc of contact too small	Check belt wrap to drive sprockets. Minimum arc of contact should be 180°.
Belt length at center or lower head drive configuration is longer than the catenary sag length	Increase catenary sag distance. Increase belt wrap to approx. 200°. Check distance from shaft to backbending or snub roller(s) (2–3 times belt pitch). If necessary, install a gravity roller(s).

### → Excessive sprocket wear

Possible cause	Recommended measures
Abrasive material	Improve cleaning or add protective shields to reduce the amount of abrasive material in contact with the belt and sprockets. Use TPU sprockets.
Incorrect number of sprockets	Check to see if the minimum number of recommended sprockets is used. Too few sprockets will cause premature sprocket wear.
Sprockets not "timed" correctly	If the total number of teeth is not divisible by four, the sprockets must be "timed" by aligning the timing marks.
Incorrect "A" and "C" dimensions	Check to see that the shaft is adjusted to provide the recommended "A" and "C" dimensions.
Locked sprocket on drive or idle shaft has incorrect placement or is loose (sprockets misaligned)	The center sprocket on the drive and idle shafts must be aligned and engaging the belt. Check the retaining devices to ensure the sprockets are secured.
High belt speed	High belt speeds will increase belt wear, especially on conveyors with short centerline distances. Reduce belt speed if possible.
High belt tension	High belt tension will increase belt wear. Check to ensure the recommended catenary sag is present. Use TPU sprockets.

### → Excessive belt wear

Possible cause	Recommended measures
Abrasive material	Improve cleaning or add protective shields to reduce the amount of abrasive material in contact with the belt and sprockets.
Incorrect belt material	Check material specifications to ensure that the optimal material is used. Call the Habasit technical service team for recommendations.
Incorrect wear strip material	Check material specifications to ensure that the optimal material is used. Call the Habasit technical service team for recommendations.
Incorrect wear strip placement	Check material specifications to ensure that the optimal material is used. Call the Habasit technical service team for recommendations.
Method of product loading	Reduce the distance at which product is deposited on the belt. If product sliding occurs, refer to material specifications.
High belt speed	High belt speeds will increase belt wear, especially on conveyors with short centerline distances. Reduce belt speed if possible.

### → Belt stretching and excessive catenary sag

Possible cause	Recommended measures
Abrasive material	Improve cleaning or add protective shields to reduce the amount of abrasive material in contact with the belt and sprockets.
Incorrect tension	Adjust.
Incorrect belt/rod material	Check the material combinations used and call Habasit to confirm the correct material for the application.
High temperatures	High temperatures cause the belt to elongate by a large percentage. Check if the catenary sag is long enough to compensate the elongation. It may be necessary to install a gravity or pneumatic tensioning device.

### → Pivot rod (hinge pin) migrating out of belt

Possible cause	Recommended measures
Rods not properly seated in snap-in position	Check if the rod head and/or edge module is damaged; if necessary replace. Reinstall properly.
Rod elongates due to high load and/or high temperature	Shorten the rod and reinstall or replace it by a new and shorter rod.
Rod does not snap in properly (too loose or too tight)	Check if the correct rod is used → see product data sheet
Rod cannot be extracted	Smart Fit retaining system: check correct screw-driver position (should be between modules).



### 1. Symbols for calculations

Term	Symbol	Metric unit	Imperial unit
Acceleration factor due to gravity	$g$	9.81 m/s <sup>2</sup>	–
Adjusted tensile force (belt pull) with service factor, per m of belt width	$F'_s$	N/m	lb/ft
Admissible tensile force, per m of belt width	$F_{adm}$	N/m	lb/ft
Belt (module) pitch	$p$	mm	inch
Belt length with accumulated products	$l_a$	m	ft
Belt speed	$v$	m/s	ft/min
Belt tension caused by the catenary sag	$F'_c$	N/m	lb/ft
Belt width	$b_0$	mm	inch
Coefficient of friction belt/product	$\mu_P$	–	–
Coefficient of friction belt/support	$\mu_P$	–	–
Coefficient of thermal expansion	$\alpha$	$\frac{mm}{m \cdot ^\circ C}$	$\frac{inch}{ft \cdot ^\circ F}$
Collapse factor (radius belts)	$Q$	–	–
Conveying distance, horizontal projection	$l_1$	m	ft
Conveying height	$h_0$	mm	inch
Distance between bearings	$l_b$	mm	inch
Distance between conveyor shafts	$l_0$	m	ft
Effective tensile force (belt pull), per m of belt	$F'_E$	N/m	lb/ft
Height of catenary sag	$h_c$	mm	inch
Inner radius of curve radius belt	$R$	mm	inch
Length of catenary sag	$l_c$	mm	inch
Length of curve (radius belt)	$l_R$	mm	inch
Mass of belt / m <sup>2</sup> (weight of belt / m <sup>2</sup> )	$m_B$	kg/m <sup>2</sup>	lb/sqft
Mass of product / m <sup>2</sup> (weight of prod. / m <sup>2</sup> )	$m_P$	kg/m <sup>2</sup>	lb/sqft
Nominal tensile strength, per m of belt width	$F'_N$	N/m	lb/ft
Operating temperature	$T$	°C	°F
Pitch diameter of sprocket	$d_P$	mm	inch
Shaft deflection	$f$	mm	inch
Shaft diameter	$d_W$	mm	inch
Shaft load	$F_W$	N	lb
Speed factor	$C_V$	–	–
Temperature factor	$C_T$	–	–
Torque of motor	$T_M$	Nm	in-lb
Total geometrical belt length	$l_g$	mm	inch

### 2. Symbols for illustrations

Term	Symbol	Metric unit	Imperial unit
Belt	BE		
Belt thickness	S	mm	<i>inch</i>
Catenary sag	CA	–	–
Distance between end of slider support and sprocket shaft center	C	mm	<i>inch</i>
Height of flights/side guards	H	mm	<i>inch</i>
Hub size (shaft diameter) of sprocket, square or round	B	mm	<i>inch</i>
Idling shaft	U	–	–
Inside radius of radius belt	R	–	–
Length of flight module	L	mm	<i>inch</i>
Level (height) of belt surface from the shaft center	A0	mm	<i>inch</i>
Level (height) of slider support from the shaft center	A1	mm	<i>inch</i>
Motor/drive shaft	M	–	–
Offset center sprocket from belt centerline	e	mm	<i>inch</i>
Pitch diameter of sprocket	dp	mm	<i>inch</i>
Retainer clip for sprockets	RC	–	–
Side guides radius belt (hold-down rails)	SC	–	–
Slider shoe for hold-down or support of belt	SH	–	–
Slider support return side	SR	–	–
Slider support transport side	ST	–	–
Sprocket	SP	–	–
Sprocket distance	a	mm	<i>inch</i>
Sprocket distance to left belt edge	XL	mm	<i>inch</i>
Sprocket distance to right belt edge	XR	mm	<i>inch</i>
Take-up device (tensioning device)	TU	–	–
Thickness of transfer plate (comb)	K	mm	<i>inch</i>
Wear strip for support of flights on return way	SF	–	–

# Appendix

## Conversion of units metric/imperial

Metric units		Factor to convert to imperial units			Factor to convert to metric units		
<b>Length</b>							
mm	millimeter	0.0394	<i>in</i>	<i>inch</i>	25.4	mm	millimeter
m	meter	3.281	<i>ft</i>	<i>foot</i>	0.3048	m	meter
<b>Area</b>							
mm <sup>2</sup>	square-millimeter	0.00155	<i>in<sup>2</sup></i>	<i>square-inch</i>	645.2	mm <sup>2</sup>	square-millimeter
m <sup>2</sup>	square-meter	10.764	<i>ft<sup>2</sup></i>	<i>square-foot</i>	0.0929	m <sup>2</sup>	square-meter
<b>Speed</b>							
m/s	meter/second	3.281	<i>ft/s</i>	<i>foot/second</i>	0.3048	m/s	meter/second
m/min	meter/minute	3.281	<i>ft/min</i>	<i>foot/minute</i>	0.3048	m/min	meter/minute
<b>Mass</b>							
kg	kilogram	2.205	<i>lb</i>	<i>pound-weight</i>	0.4536	kg	kilogram
kg/m	kilogram/meter	0.672	<i>lb/ft</i>	<i>pound/foot</i>	1.4882	kg/m	kilogram/meter
kg/m <sup>2</sup>	kilogram/sqm	0.205	<i>lb/ft<sup>2</sup></i>	<i>pound/square-foot</i>	4.882	kg/m <sup>2</sup>	kilogram/sqm
<b>Force and strength</b>							
N	Newton	0.225	<i>lb</i>	<i>pound-force</i>	4.448	N	Newton
N/mm	Newton/millimeter	5.7102	<i>lb/in</i>	<i>pound/inch</i>	0.17513	N/mm	Newton/millimeter
N/m	Newton/meter	0.0685	<i>lb/ft</i>	<i>pound/foot</i>	14.6	N/m	Newton/meter
<b>Power</b>							
kW	kilowatt	1.341	<i>hp</i>	<i>horsepower</i>	0.7457	kW	kilowatt
<b>Torque</b>							
Nm	Newton-meter	8.85	<i>in-lb</i>	<i>inch-pound</i>	0.113	Nm	Newton-meter
<b>Temperature</b>							
°C	Celsius	$9 \cdot (°C/5) + 32°$	<i>°F</i>	<i>Fahrenheit</i>	$5/9 \cdot (°F - 32°)$	°C	Celsius

Term	Explanation	Habasit symbol
Accumulation conveyors	Conveyors that collect temporary product overflows.	$l_a$
Accumulation length (distance)	Length of product accumulation in running direction of the belt.	
Acetal	See Polyacetal.	
Adjusted tensile force (adjusted belt pull) per meter of belt width	Applies a service factor to adjust the effective tensile force calculated near the driving sprocket, taking into account possible inclines and frequent starts/stops.	$F'_s$
Admissible tensile force per meter of belt width	Force or belt pull per meter of belt width allowed near the driving sprocket under operating conditions (temperature, speed).	$F'_{adm}$
Backbending	Negative bending of the belt (opposite of belt bending over sprocket)	
Belt length, inclined	Conveying length measured as a vertical projection of distance between the centers of the driving and idling shafts.	$l_0$
Belt length (theoretical)	Length of the belt measured around the sprockets including the additional length of the catenary sag.	$l_g$
Belt pitch (module pitch)	Center distance between the pivot rods (hinge rods) of a belt module.	$p$
Belt width	Geometrical width of an assembled belt from edge to edge.	$b_0$
Bi-directional drive	Driving concept allowing the belt to run forwards and backwards.	
Bricklaid	The modules of the assembled belts are staggered from row to row (like bricks in a brick wall).	
Carry way	Transport side of the belt, carrying the product.	
Catenary sag	Unsupported length of the belt used for absorbing belt length variations due to belt thermal expansion and load changes.	<b>CA</b>
Center driven belt	Sprocket of the belt engaging in the middle of the modules.	
Central drive concept	Motor located on the lower belt track halfway between the belt ends (for bi-directional drive).	
Chevron supports	Belt supports with wear strips arranged in an overlapping "V" pattern.	
Chordal action	Polygon effect: pulsation of the belt velocity caused by the polygon shape of the driving sprocket, with rise and fall of the belt surface.	
Coefficient of friction	Ratio of frictional force and contact force acting between two material surfaces.	$\mu_G, \mu_P$
Coefficient of thermal expansion	Ratio of belt lengthening and the product of belt length and temperature change.	$\alpha$
Dead plate	A metal or plastic plate installed between meeting conveyors as a transfer bridge.	
Effective tensile force (effective belt pull) per meter of belt width	Calculated near the driving sprocket, where in most cases it reaches its maximum value during operation. It depends on the friction forces between the belt and the slider supports (ST) and (SR) as well as friction against the accumulated load.	$F'_E$
Elevating conveyor	Conveyors transporting products to a higher or lower level, using flights or other suitable means to keep the products in place.	
EU	Material is compliant for food contact articles in at least one member state of the European Union.	<b>EU</b>
FDA	Food and Drug Administration. US federal agency that regulates what materials may come into contact with food.	<b>FDA</b>
Finger plates (combs)	Transfer plates, installed at the belt ends of a raised rib belt. Their fingers extend between the ribs of the belt for smooth transfer of the product	
Flat top belt	Flat top belt with 0% open area and a variety of reverse sides, e.g. smooth (M5010) or grid-like reinforcement (e.g. M2520)	
Flat top belt, perforated	The same as a flat top belt solid, but its plate modules have slots or holes for draining fluids.	
Flight	Belt module with a molded vertical plate for elevating conveyors. Flights prevent the product from slipping back while being moved upwards.	

Term	Explanation	Habasit symbol
Flush grid belt	Belt with a large percentage of open area, usually over 20%. Particularly suitable for washing, cooling applications, or if dust/dirt falls off the product.	
Gravity take-up	Belt is tensioned by the weight of a roller resting on the belt at the catenary sag on its return way (mainly for long belts).	
Hinge driven belts	Sprocket engages at the hinge of the belt.	
Hold-down device	Module with a T-shaped tab on the belt bottom, running in special guiding rails. Mainly used for large Z-conveyors to keep the belt on the base when changing from a horizontal to an inclined run.	
Hold-down tab (Hook modules)	“Hook” shaped tabs on the bottom of the radius belt edge, running below a guide rail. Prevents the belt lifting in the curve.	
Idling shaft	Shaft at the belt end opposite to the driving shaft. It is normally equipped with sprockets. As an alternative for shorter belts, flat drums can be used.	
Indent	Space at the belt edge free of flights or rubber lining.	
ISO 340 and EN 20340	International standard for flame retardation of conveyor belts. A standardized test specimen is cut out of a belt, including a rod and modules, and is exposed to a flame for 45 seconds. The standard is met if the flame is extinct within 15 seconds after the flame is removed.	<b>ISO 340</b>
Mass of belt per m <sup>2</sup> (belt weight per m <sup>2</sup> )	The belt mass (weight) is added to the product mass per m <sup>2</sup> for calculation of the friction force between the belt and the slider frame.	<b>m<sub>B</sub></b>
Mass of product per m <sup>2</sup> (product weight per m <sup>2</sup> )	Conveyed product weight as expected to be distributed over the belt surface; calculated average load per m <sup>2</sup> .	<b>m<sub>P</sub></b>
Nominal tensile strength per meter of belt width	Catalogue value. This reflects the maximum allowable belt pull at room temperature and very low speed.	<b>F'<sub>N</sub></b>
Oblong hole	Pivot hole with an oblong shape for better cleaning.	
Open area	Percentage of open surface (real vertical openings).	
Open contact area	Percentage of belt surface which is not in contact with the conveyed product.	
Open hinge	The module hinge is designed so that the pivot rod (hinge rod) is exposed for a part of its surface, allowing better cleaning.	
Perforated flat top	See flat top perforated.	<b>d<sub>P</sub></b>
Pitch diameter	Diameter of the sprocket, which defines the position of the pivot rods of the driven belt.	
Pivot rods (hinge rods)	These rods (pins) link the modules of a belt to provide pivoting and strong connection. Materials are normally PP, POM and PE.	
Polygon effect	“Chordal action”: pulsation of the belt velocity caused by the polygon shape of the driving sprocket, with rise and fall of the belt surface.	
Radius belt	Belt suitable for running around curves (radius applications).	
Raised rib belt	Belt with higher longitudinal ribs on its top surface. These ribs create longitudinal “slots” for the engagement of finger plates for smooth product transfer at the belt ends.	
Screw type take-up	The catenary sag is adjusted by means of a screw tensioning device at the idling shaft of the conveyor.	
Service factor	The calculated effective belt pull is adjusted by the service factor, taking into account possible heavy running conditions (start/stop, inclination).	<b>c<sub>S</sub></b>
Sideguards	Plates designed to be installed lengthwise at the belt edge to form a wall. Usually used in connection with flights.	
Slider support/bed	Frame equipped with wear strips to carry the running belt with low friction and wear. A closed plate is called a slider bed.	<b>ST, SR</b>
Speed factor	The nominal tensile strength, valid at very low speeds and room temperatures, is reduced to the admissible tensile force by the influence of higher speeds and/or temperatures; therefore it is multiplied by the respective factor.	<b>c<sub>V</sub></b>

Term	Explanation	Habasisit symbol
Spiral conveyor	Radius belt with more than one full turn, travelling in a helical path around a central cylinder upwards or downwards.	
Sprocket	Gear, mostly plastic, in exceptional cases made of metal, shaped to engage in the grid pattern of the belt modules, providing positive torque transmission to the belt.	
Take-up	Tensioning device for adjustment of the catenary sag, screw type, gravity type, or spring-loaded type at the idling shaft of the conveyor.	<b>TU</b>
Temperature factor	The nominal tensile force, valid at very low speeds and room temperatures, is reduced to the admissible tensile force by the influence of higher speeds and/or temperatures; therefore it is multiplied by the respective factor.	<b>c<sub>T</sub></b>
Transport length	Conveying length measured between the centers of the driving and idling shafts.	<b>l<sub>0</sub></b>
USDA	United States Department of Agriculture. US federal agency that has defined requirements for equipment that may be in contact with meat and poultry or dairy.	<b>USDA</b>
UL 94	Underwriters Laboratories Standard for flame retardation of thermoplastic materials. UL94 V0 (5 samples, mean duration of burning ≤ 10 sec) UL94 V1 (5 samples, mean duration of burning ≤ 30 sec) UL94 V2 (like V1 but burning particles may drop down) UL94 HB (test material that does not meet V1 can be tested with horizontally arranged test specimens instead of vertically)	<b>UL 94 V0</b> <b>UL 94 V1</b> <b>UL 94 V2</b> <b>UL 94 HB</b>
Wear strip	Plastic strip, mainly from PE, used on the support frame of the belt to provide low friction and low wear.	

**Note:** The "apostrophe" after the symbols (F') indicates that these forces are not absolute values but are specific forces (N per meter of belt width).

# Appendix

## Design recommendations

Recommendations for nosebars, support, idling rollers and backbending diameters

	Nosebar diameter		Diameter for idling rollers [U]		Diameter for support rollers [R1]		Diameter of gravity, center and lower head drive rollers [R2]		Backbending radius for elevators, Z-conveyor without side guards		Backbending radius for elevators, Z-conveyor with side guards	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
M0800	6	0.24	6	0.24	50	2.0	50	2.0	–	–	–	–
M1000	12	0.5	12	0.5	50	2.0	50	2.0	–	–	–	–
M1100	12	0.5	12	0.5	50	2.0	75	3.0	–	–	–	–
M1200	18	0.7	18	0.7	50	2.0	75	3.0	150	6.0	250	10
SM605	19	0.75	19	0.75	50	2.0	100*	4.0	150	6.0	300	12
HDS605	19	0.75	19	0.75	50	2.0	100	4.0	150	6.0	–	–
RS511/515	19	0.75	19	0.75	50	2.0	100*	4.0	150	6.0	–	–
106					50	2.0	100	4.0	150	6.0	300	12
M2400					50	2.0	100	4.0	150	6.0	–	–
M2500					50	2.0	100	4.0	150	6.0	250	10
M2600					50	2.0	100	4.0	150	6.0	–	–
IS/CT610					75	3.0	100*	4.0	150	6.0	300	12
ST/VT610					75	3.0	100	4.0	150	6.0	300	12
HDS610					75	3.0	100*	4.0	150	6.0	300	12
208					75	3.0	100	4.0	150	6.0	–	–
MB610					75	3.0	100	4.0	150	6.0	–	–
F50					75	3.0	100	4.0	150	6.0	300	12
PR612					75	3.0	100	4.0	150	6.0	300	12
M3300					75	3.0	100	4.0	150	6.0	–	–
M3800					100	4.0	150	6.0	150	6.0	250	10
IS615					75	3.0	150	6.0	150	6.0	300	12
ST615					75	3.0	150	6.0	150	6.0	300	12
CC40					75	3.0	150	6.0	150	6.0	300	12
M5000					100	4.0	200	8.0	150	6.0	250	10
M5100					100	4.0	200	8.0	150	6.0	–	–
M5200					100	4.0	200	8.0	150	6.0	250	10
M5400					100	4.0	200	8.0	150	6.0	–	–
SP/SE620					100	4.0	200	8.0	150	6.0	300	12
HDS620					100	4.0	200	8.0	250	10.0	300	12
HDSCT620					100	4.0	200*	8.0	300	12.0	300	12
HDU620					100	4.0	200	8.0	250	10.0	300	12
HDUCT620					100	4.0	200*	8.0	300	12.0	300	12
FF620					100	4.0	200	8.0	200	10.0	600	24
FF620-WR					100	4.0	200	8.0	250	12.0	600	24
MB620					100	4.0	200	8.0	200	10.0	–	–
PR620					100	4.0	200*	8.0	150	6.0	300	12
M6300					100	4.0	200	8.0	150	6.0	–	–
M6400						4.0	200	8.0	200	8.0	–	–

\* Multiply by 1.5 for curved top belts. See illustrations on pages 38, 39, 40, 42, 43, 44, 46 and 68.

For Series MXXXX belts consult the sprocket data sheets

Sprocket center distance dependent on load												Distance belt edge to first sprocket up to*	
Series	Belt pitch	At load 50% or less		At load > 50%–60%		At load > 60%–70%		At load > 70%–80%		At load > 80%–100%			
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
SM/CM605	12.7	101.6	4	88.9	3.5	76.2	3	63.5	2.5	50.8	2	25.4	1
HDS605	12.7	101.6	4	88.9	3.5	76.2	3	63.5	2.5	50.8	2	25.4	1
RS511/515	Note: For 511/515 sprocket spacing, consult the specific engineering guidelines												
106	19.1	101.6	4	88.9	3.5	76.2	3	63.5	2.5	50.8	2	25.4	1
IS/CT610	25.4	152.4	6	127	5	101.6	4	76.2	3	50.8	2	25.4	1
SP/IS615	38.1	152.4	6	127	5	101.6	4	76.2	3	50.8	2	25.4	1
ST/VT610	25.4	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	25.4	1
HDS610	25.4	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	25.4	1
208	25.4	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	25.4	1
MB610	25.4	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	25.4	1
F50	27.9	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	50.8	2
PR612	30.5	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	101.6**	4
ST/VT615	38.1	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	25.4	1
CC40	44.5	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	63.5	2.5
SP/SE/IS620	50.8	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	25.4	1
HDS620	50.8	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	76.2	3
HDU620	50.8	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	76.2	3
FF620	50.8	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	76.2	3
MB620	50.8	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	76.2	3
PR620	50.8	152.4	6	137.7	5.5	127	5	114.3	4.5	101.6	4	76.2	3

\* For belts using hold-down tabs, allow minimum clearance of 1" (25 mm) from the hold-down tab.

\*\* PR61200 – 4" (100 mm) in from the belt edge with wheel support for the outer edges.

Sprockets are equally spaced between the locked center and the now properly positioned outboard sprockets.

### Sprocket spacing in special situations for Series 40 (41 and 42) (Fig. 680)

Series 41 and 42 belting has a special molded-in tracking groove on the underside of the belt. A green-colored tracking sprocket with a large outer diameter engages in the groove keeping the belt from mistracking. The white-colored driving sprockets have a smaller outer diameter and do not engage the belt laterally. (Figure 680)

Note: Belt widths of 9" (305 mm) or less do not require a tracking sprocket.

Sprocket spacing must not exceed 6" (152 mm), and should not start closer than 2.5" (63.5 mm) from the edge of the belt.

The design of the Series 40 belts allows for the use of setscrews through the sprocket hub to maintain sprocket positioning on the shaft. Consideration must first be given to using the preferred method: retainer rings or set collars.

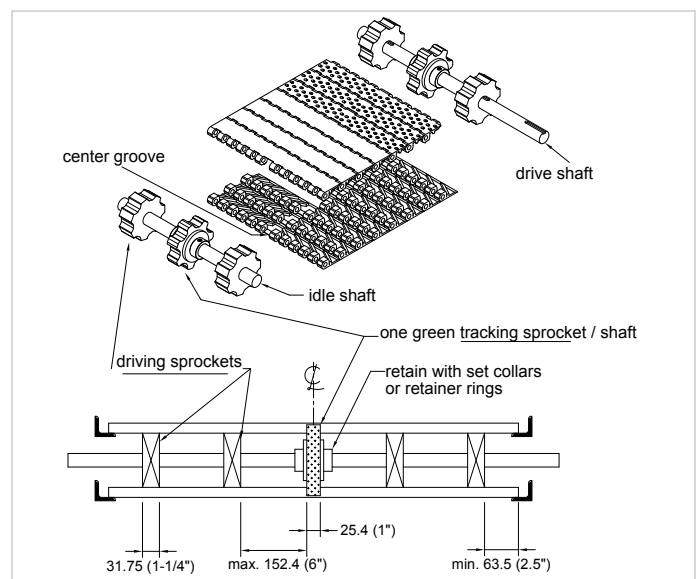


Figure 680



### Series 50 (51, 52, 53 and 54) (Fig. 690)

Special attention must be paid to sprocket positioning on the drive, idle and intermediate idler shafts when using any of the Series 50 belt styles. Figure 690 shows the proper positioning of the sprocket so that when the belt is moving, the sprocket teeth do not touch the hinge pins.

Drive shaft sprockets are positioned in the even-numbered holes across the belt width. In this position the sprocket tooth pushes against the plastic portion of the belt hinge and not the exposed hinge rod.

For the tail and intermediate shafts, the sprockets are positioned in the odd-numbered holes across the belt width. In this position the plastic portion of the belt hinge, not the exposed hinge rod, pushes the sprocket tooth.

Sprocket spacing should not exceed 6" (152 mm) and should not start closer than 2" (50 mm) from the belt edge.

The design of the Series 50 belts allows the use of setscrews through the sprocket hub to maintain sprocket positioning on the shaft. Consideration must first be given to using the preferred method: the use of retainer rings or set collars.

**Note: Due to the positioning requirements of the drive and tail shaft sprockets, the lateral positioning of the locked center-most sprockets will be offset by approximately 0.66" (17 mm).**

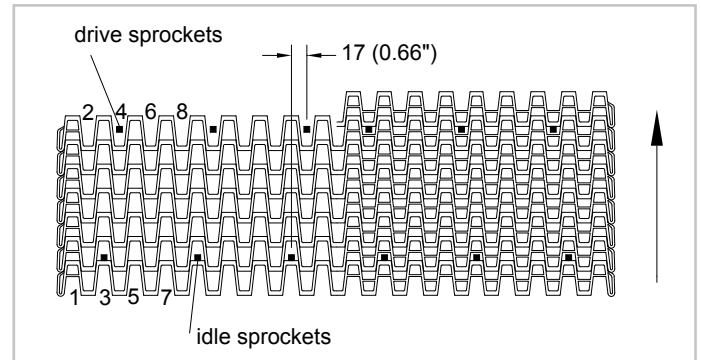


Figure 690

## Customers first

Your success is our goal. That is why we don't just offer products; we provide solutions. As committed partners to our customers, we are dedicated to sharing our knowledge and providing full support.

Since our founding in 1946, Habasit has been finding ways to meet customer's specific needs in every application. This is what differentiates us as the #1 worldwide belting provider in the industry today.



## Comprehensive consulting and technical support

Profit from the best consulting and technical support in the lightweight belting industry. Local experts are always available to assist you in your belting needs. The Habasit team is proud to provide the highest level of support, together with top-quality products that lead the global market for decades.



## Belt Selection and Calculation Assistance

We are always glad to help you select the most suitable belt for any application for your convenience. We now also provide the free online tool 'SeleCalc' which allows you to easily make selections and calculations yourself. Simply register online at [selecalc.habasit.com](http://selecalc.habasit.com).



## Fabrication, assembly and local installation services

As a full-service belting provider, we offer joining and assembly services either at our own locations or directly on your equipment.

Habasit has over 30 affiliates worldwide, each with its own inventory, fabrication, assembly and service facilities.



Together with representative offices and numerous qualified distributors, we can react quickly and efficiently to meet all your needs.



## Customer training programs

To ensure the optimal performance and maximum lifespan of all our products, we offer training programs and various support tools. This includes proper procedures for fabrication, installation, assembly, maintenance and belt repair, all of which take place at a Habasit site or at your location.



## Belt monitoring, inspections, analyses and process optimization proposals

We organize and handle belt maintenance, inspections, analyses and surveys at customer's sites. Upon request, we are ready to develop optimization proposals to ensure you're getting maximum value from your machinery and process output.



## Design assistance for customized solutions

Habasit believes in building partnerships with our customers. Our engineering team will work closely with your engineers on joint design developments from initial design to final implementation. This expert service can be invaluable for projects involving new technologies or large-scale modifications and adaptations.



### Committed to innovation

Because our customers' belting challenges and needs are always changing, we consistently invest a substantial amount of labor and resources into the research and development of new products and solutions.


### Certified for quality

We deliver the highest quality standards not only in our products and solutions, but also in our employees' daily work processes. Habasit AG is certified according to ISO 9001:2008.




### Worldwide leading product range

Habasit offers the largest selection of belting, conveying, processing and complementary products in the industry. Our response to any request is nothing less than a specific, tailor-made solution.



**HabaFLOW®**  
Fabric-based conveyor and processing belts



**HabasitLINK®**  
Plastic modular belts



**Habasit Cleandrive™**  
Monolithic reinforced conveyor belts



**HabaDRIVE®**  
Power transmission belts



**HabaSYNC®**  
Timing belts




**HabaCHAIN®**  
Chains (slat and conveyor chains)



Machine tapes



Round belts




Seamless belts



**HabiPLAST®**  
Profiles, Guides, Wear strips



**Accessories**  
(sprockets, flights, welding profiles, etc.)



**Fabrication tools**  
(joining, cutting & preparing devices)

## EMEA

### Germany

Habasit GmbH, Eppertshausen  
Phone: +49 6071 969 0  
www.habasit.de

### Switzerland

Habasit GmbH, Reinach  
Phone: +41 61 577 51 00  
www.habasit.ch

### Austria

Habasit GmbH, Vienna  
Phone: +43 1 690 66  
www.habasit.at

### Italy

Habasit Italiana SpA  
Customer Care: 199 199 333  
For int. calls: +39 0438 911444  
www.habasit.it

### France

Habasit France S.A.S., Mulhouse  
Phone: +33 389 338 903  
www.habasit.fr

### Spain

Habasit Hispánica S.A.  
Barberá del Vallés  
Phone: +34 937 191 912  
www.habasit.es

### United Kingdom & Ireland

Habasit UK Ltd., Elland  
Phone: +44 333 207 6570  
www.habasit.co.uk

### Netherlands

Habasit Netherlands BV, Nijkerk  
Phone: +31 332 472 030  
www.habasit.nl

## Belgium & Luxembourg

Habasit Belgium N.V., Zaventem  
Phone: +32 27 250 430  
www.habasit.be | habasit.lu

## Turkey

Habasit Kayis San.  
Ve Tic. Ltd. Sti., Istanbul  
Phone: +90 444 70 43  
www.habasit.com.tr

## Nordic countries

Habasit AB, Hindås, Sweden  
Phone: +46 301 226 00  
www.habasit.se

## Poland

Habasit Polska Sp. z o.o.  
Dąbrowa Górnicza  
Phone: +48 32 639 02 40  
www.habasit.pl

## Russia

OOO Habasit Ltd.  
Moscow Region  
Phone: +7 495 966 1566  
www.habasit.ru

## Ukraine

Habasit Ukraine LLC., Vinnytsa  
Phone: +38 044 290 88 99  
www.habasit.ua

## South Africa

Habasit South Africa Pty Ltd.  
Gauteng  
Phone: +27 10 001 6770  
www.habasit.co.za

## APAC

### Japan

Habasit Nippon Co., Ltd.  
Yokohama  
Phone: +81 45 476 0371  
www.habasit.co.jp

### China

Habasit East Asia Ltd.  
Fotan, Shatin, N.T., Hong Kong  
Phone: +852 2145 0150  
www.habasit.com.hk

Habasit (Shanghai) Co. Ltd.

Shanghai  
Phone: +8621 5488 1218  
www.habasit.com.cn

### Taiwan

Habasit (Taiwan) Ltd.  
New Taipei City  
Phone: +886 2 2267 0538  
www.habasit.com.tw

### India

Habasit India, Coimbatore  
Phone: +91 422 262 78 79  
www.habasit.in

### Singapore

Habasit Far East Pte Ltd.  
Singapore  
Phone: +65 6862 5566  
www.habasit.com.sg

### Australia

Habasit Australia Pty Ltd.  
Silverwater, Sydney  
Phone: +61 1300 945 455  
www.habasit.com.au

## New Zealand

Habasit New Zealand Pty Ltd.  
Auckland  
Phone: 0800 000 070  
www.habasit.co.nz

## AMERICAS

### USA

Habasit America  
Suwanee, Georgia  
Phone: +1 800 458 6431  
www.habasitamerica.com

### Canada

Habasit Canada Ltd., Oakville  
Phone: +1 905 827 41 31  
www.habasit.ca

### Mexico

Habasit Rocua, Zapopan  
Phone: +52 33 3824 2358  
www.habasitrocua.mx

### Brazil

Habasit do Brasil, Barueri - SP  
Phone: +55 11 4789 9022  
www.habasit.com.br

### Habasit AG

Römerstrasse 1  
CH-4153 Reinach, Switzerland  
Phone +41 61 715 15 15  
Fax +41 61 715 15 55  
E-mail info@habasit.com  
www.habasit.com

Registered trademarks  
Copyright Habasit AG  
Subject to alterations

6031BRO.MOD-en0816HOR